


**Alchip™-MVH Series**

- Lower ESR, Higher ripple current
- Endurance : 1,000 to 5,000 hours at 125°C
- Suitable to fit for automotive equipment
- Solvent resistant type except 63 to 100V<sub>dc</sub> (see PRECAUTIONS AND GUIDELINES)
- Vibration resistant structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




**◆ SPECIFICATIONS**

Items	Characteristics										
<b>Category Temperature Range</b>	-40 to +125°C										
<b>Rated Voltage Range</b>	10 to 100V <sub>dc</sub>										
<b>Capacitance Tolerance</b>	±20% (M) (at 20°C, 120Hz)										
<b>Leakage Current</b>	F60 to JA0	I=0.01CV or 3μA, whichever is greater.									
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater.									
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)										
<b>Dissipation Factor (tan δ)</b>	Rated voltage (V <sub>dc</sub> )	10V	16V	25V	35V	50V	63V	80V	100V		
	tan δ (Max.)	F60 to JA0	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10	
		KE0 to MN0	0.22	0.18	0.16	0.14	0.12	0.14	—	0.10	
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)											
<b>Low Temperature Characteristics (Max. Impedance Ratio)</b>	Rated voltage (V <sub>dc</sub> )	10V	16V	25V	35V	50V	63V	80V	100V		
	F60 to JA0	Z(-25°C)/Z(+20°C)	3	2	2	2	2	2	2	2	
		Z(-40°C)/Z(+20°C)	6	4	4	3	3	3	3	3	
	KE0 to MN0	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	—	2	
		Z(-40°C)/Z(+20°C)	8	6	4	3	3	3	—	3	
(at 120Hz)											
<b>Endurance</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified time at 125°C.										
	Time	F60 to H63 (10 to 100V <sub>dc</sub> ) : 1,000hours HA0 to JA0 (10 to 100V <sub>dc</sub> ) : 2,000hours KE0 to MN0 (10 to 100V <sub>dc</sub> ) : 5,000hours									
	Capacitance change	≤ ±30% of the initial value									
	D.F. (tan δ)	≤300% of the initial specified value									
	Leakage current	≤The initial specified value									
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
	Rated voltage(V <sub>dc</sub> )	10 to 50V <sub>dc</sub>					63 to 100V <sub>dc</sub>				
	Capacitance change	≤ ±30% of the initial value					≤ ±30% of the initial value				
	D.F. (tan δ)	≤300% of the initial specified value					≤300% of the initial specified value				
	Leakage current	≤The initial specified value					≤500% of the initial specified value				


**◆ DIMENSIONS [mm]**

- Terminal Code : A
- Size code : F60 to MN0

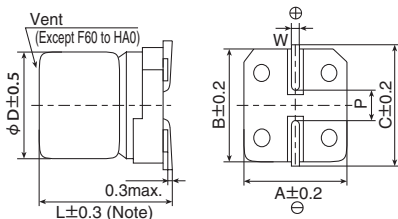

Note : L±0.5 for HA0 to MN0

- Terminal Code : G(Vibration resistant structure)
- Size code : F80, HA0 to MN0

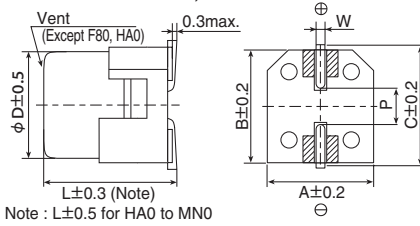


Note : L±0.5 for HA0 to MN0


▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

**◆ PART NUMBERING SYSTEM**

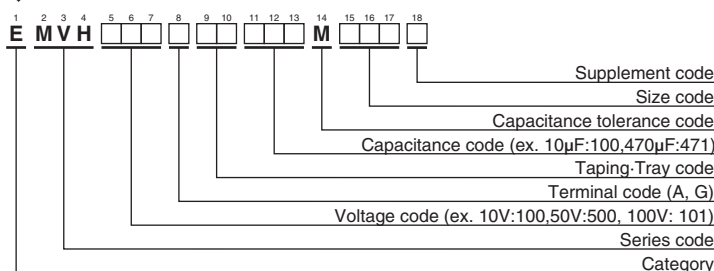

**◆ MARKING**

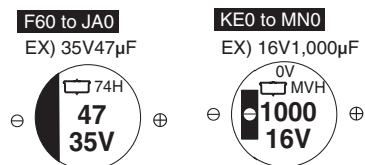

Please refer to "Product code guide (surface mount type)"



Alchip™ - **MVH** Series

◆ **STANDARD RATINGS**

WV (V <sub>dc</sub> )	Cap (μF)	Size code	ESR (Ω max./100kHz)		Rated ripple current (mArms/125°C)		Part No.	
			20°C	-40°C	100kHz	120Hz		
10	100	F80	0.90	14.0	110	—	EMVH100□RA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH100ARA101MH63G	
	220	F80	0.90	14.0	110	—	EMVH100□RA221MF80G	
	220	H63	0.90	14.0	110	—	EMVH100ARA221MH63G	
	220	HA0	0.40	6.0	220	—	EMVH100□RA221MHA0G	
	330	HA0	0.40	6.0	220	—	EMVH100□RA331MHA0G	
	330	JA0	0.30	4.5	296	—	EMVH100□RA331MJA0G	
	470	JA0	0.30	4.5	296	—	EMVH100□RA471MJA0G	
	1,000	KE0	0.14	2.1	750	—	EMVH100□RA102MKE0S	
	2,200	LH0	0.10	1.5	1,000	—	EMVH100□RA222MLH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH100□RA222MMH0S	
	3,300	MH0	0.10	1.5	1,200	—	EMVH100□RA332MMH0S	
4,700	MN0	0.058	0.87	1,550	—	EMVH100□RA472MMN0S		
16	47	F60	1.6	24.0	69	—	EMVH160ARA470MF60G	
	100	HA0	0.40	6.0	220	—	EMVH160□RA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH160□RA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH160□RA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH160□RA331MJA0G	
	470	KE0	0.14	2.1	750	—	EMVH160□RA471MKE0S	
	680	KE0	0.14	2.1	750	—	EMVH160□RA681MKE0S	
	680	LH0	0.10	1.5	1,000	—	EMVH160□RA681MLH0S	
	1,000	MH0	0.10	1.5	1,200	—	EMVH160□RA102MMH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH160□RA222MMH0S	
25	33	F60	1.6	24.0	69	—	EMVH250ARA330MF60G	
	47	F80	0.90	14.0	110	—	EMVH250□RA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH250ARA470MH63G	
	100	F80	0.90	14.0	110	—	EMVH250□RA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH250ARA101MH63G	
	100	HA0	0.40	6.0	220	—	EMVH250□RA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH250□RA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH250□RA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH250□RA331MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH250□RA331MKE0S	
	470	KE0	0.14	2.1	750	—	EMVH250□RA471MKE0S	
	470	LH0	0.10	1.5	1,000	—	EMVH250□RA471MLH0S	
	680	LH0	0.10	1.5	1,000	—	EMVH250□RA681MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH250□RA681MMH0S	
	1,000	MN0	0.058	0.87	1,550	—	EMVH250□RA102MMN0S	
35	10	F60	1.6	24.0	69	—	EMVH350ARA100MF60G	
	22	F60	1.6	24.0	69	—	EMVH350ARA220MF60G	
	33	F80	0.90	14.0	110	—	EMVH350□RA330MF80G	
	33	H63	0.90	14.0	110	—	EMVH350ARA330MH63G	
	47	F80	0.90	14.0	110	—	EMVH350□RA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH350ARA470MH63G	
	47	HA0	0.40	6.0	220	—	EMVH350□RA470MHA0G	
	100	HA0	0.40	6.0	220	—	EMVH350□RA101MHA0G	
	100	JA0	0.30	4.5	296	—	EMVH350□RA101MJA0G	
	220	JA0	0.30	4.5	296	—	EMVH350□RA221MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH350□RA331MKE0S	
	330	LH0	0.10	1.5	1,000	—	EMVH350□RA331MLH0S	
	470	KG5	0.11	1.5	900	—	EMVH350□RA471MKG5S	
	470	LH0	0.10	1.5	1,000	—	EMVH350□RA471MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH350□RA681MMH0S	
	50	10	F60	2.8	42.0	51	—	EMVH500ARA100MF60G
		10	H63	1.6	30.0	83	—	EMVH500ARA100MH63G
		22	F80	2.0	30.0	83	—	EMVH500□RA220MF80G
22		H63	1.6	30.0	83	—	EMVH500ARA220MH63G	
33		F80	2.0	30.0	83	—	EMVH500□RA330MF80G	
33		H63	1.6	30.0	83	—	EMVH500ARA330MH63G	
33		HA0	0.70	11.0	160	—	EMVH500□RA330MHA0G	
47		HA0	0.70	11.0	160	—	EMVH500□RA470MHA0G	
47		JA0	0.50	7.5	247	—	EMVH500□RA470MJA0G	
100		JA0	0.50	7.5	247	—	EMVH500□RA101MJA0G	
100		KE0	0.23	3.5	550	—	EMVH500□RA101MKE0S	
220		KE0	0.23	3.5	550	—	EMVH500□RA221MKE0S	
220		LH0	0.15	2.3	850	—	EMVH500□RA221MLH0S	
330		KG5	0.18	2.7	700	—	EMVH500□RA331MKG5S	
330		LH0	0.15	2.3	850	—	EMVH500□RA331MLH0S	
470		MH0	0.15	2.3	920	—	EMVH500□RA471MMH0S	
63		10	F80	2.0	100	60	—	EMVH630□RA100MF80G
		10	H63	2.0	110	60	—	EMVH630ARA100MH63G
	22	HA0	0.70	35.0	100	—	EMVH630□RA220MHA0G	
	33	HA0	0.70	35.0	100	—	EMVH630□RA330MHA0G	
	33	JA0	0.50	25.0	170	—	EMVH630□RA330MJA0G	
	47	HA0	0.70	35.0	100	—	EMVH630□RA470MHA0G	
	47	JA0	0.50	25.0	170	—	EMVH630□RA470MJA0G	
	100	KE0	0.25	12.5	500	—	EMVH630□RA101MKE0S	
	220	KG5	0.20	10.0	600	—	EMVH630□RA221MKG5S	
	330	LH0	0.18	9.0	820	—	EMVH630□RA331MLH0S	
80	10	HA0	0.75	50.0	70	—	EMVH800□RA100MHA0G	
	22	HA0	0.75	50.0	70	—	EMVH800□RA220MHA0G	
	22	JA0	0.55	35.0	115	—	EMVH800□RA220MJA0G	
	33	HA0	0.75	50.0	70	—	EMVH800□RA330MHA0G	
	33	JA0	0.55	35.0	115	—	EMVH800□RA330MJA0G	
	47	JA0	0.55	35.0	115	—	EMVH800□RA470MJA0G	
	100	10	HA0	0.75	50.0	70	—	EMVH101□RA100MHA0G
22		HA0	0.75	50.0	70	—	EMVH101□RA220MHA0G	
22		JA0	0.55	35.0	115	—	EMVH101□RA220MJA0G	
33		JA0	0.55	35.0	115	—	EMVH101□RA330MJA0G	
47		KE0	0.33	16.5	450	—	EMVH101□RA470MKE0S	
68		KG5	0.26	13.0	550	—	EMVH101□RA680MKG5S	
100	LH0	0.24	12.0	650	—	EMVH101□RA101MLH0S		
220	MN0	0.16	8.0	950	—	EMVH101□RA221MMN0S		

□ : Enter the appropriate terminal code.  
 Production of the products shown in [ ] is scheduled to be discontinued.  
 \*1: Assembly boards with the designated products attached cannot be cleaned.

◆ **RATED RIPPLE CURRENT MULTIPLIERS**

● Frequency Multipliers

Size code	Capacitance(μF)	Frequency(Hz)			
		120	1k	10k	100k
F60 to JA0	10	0.66	0.86	0.93	1.00
	22 to 470	0.93	0.97	1.00	1.00
KE0 to MN0	47 to 100	0.40	0.75	0.90	1.00
	220 to 470	0.50	0.85	0.94	1.00
	680 to 1,000	0.60	0.87	0.95	1.00
	2,200 to 3,300	0.75	0.90	0.95	1.00
	4,700	0.85	0.95	0.98	1.00

The deterioration of aluminum electrolytic capacitors accelerates their life due to the internal heating produced by ripple current. For details, refer to Section "5-3 Ripple Current Effect on Lifetime" in the catalog, Technical Note.



- Always read "Notes on Use" before using the product in order to enable you to use the product correctly and prevent any faults and accidents from occurring.
- Request the Product Specification on the product of NIPPON CHEMI-CON CORPORATION to refer to it as well as this brochure prior to the order of the products. Some specific notes on use of the ordered product may be described in the specifications.
- The products listed in this catalog are designed and manufactured for general electronics equipment use and are not intended for use in applications that can adversely affect human life; where the malfunction of equipment may cause damage to life or property. In addition, our products are not intended to be used in specific applications that may cause a major social impact. Please consult with us in advance of usage of our products in the following listed applications. ① Aerospace equipment ② Power generation equipment such as thermal power, nuclear power etc. ③ Medical equipment ④ Transport equipment (automobiles, trains, ships, etc.) ⑤ Transportation control equipment ⑥ Disaster prevention / crime prevention equipment ⑦ Highly publicized information processing equipment ⑧ Submarine equipment ⑨ Other applications that are not considered general-purpose applications.
- The circuits described as examples in this catalog and the "delivery specifications" are featured in order to show the operations and usage of our products, however, this fact does not guarantee that the circuits are available to function in your equipment systems. We are not in any case responsible for any failures or damage caused by the use of information contained herein. You should examine our products, of which the characteristics are described in the "delivery specifications" and other documents, and determine whether or not our products suit your requirements according to the specifications of your equipment systems. Therefore, you bear final responsibility regarding the use of our products.  
Please make sure that you take appropriate safety measures such as use of redundant design and malfunction prevention measures in order to prevent fatal accidents and/or fires in the event any of our products malfunction.
- We strongly recommend our customers to purchase Nippon Chemi-Con products only through our official sales channels. We assume no responsibility for any defects or damages caused by using products purchased from outside our official sales channel or of counterfeit goods. In addition, we will ask the customer to pay the investigation cost for products purchased outside our official sales channel.
- We reserve the right to discontinue production and delivery of products. We do not guarantee that all the products included in this catalog will be available in the future.  
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products
- We continually strive to improve the quality and reliability of our products, but in any case that our product does not meet our published specifications, please stop using it promptly and contact us immediately. As for compensation for non-conforming goods delivered by Chemi-Con, we will limit it only to goods found in non-compliance of our published specifications. This may be accomplished by a no cost replacement of non-conforming individual products, a credit of the piece price paid per each individual non-conforming product, or in other ways deemed necessary.  
In addition, we have an established system with enhanced traceability, therefore we will limit the applicable lot items for any potential compensation.

[Part Numbering System](#)

[Part Numbering System \(Appendix\)](#)

[Standardization](#)

[Available Items by Manufacturing Locations](#)

[Environmental Measures](#)

[Technical Note](#)

[Precautions and Guidelines](#)

[Recommended Soldering Conditions](#)

[Taping, Lead-preforming and Packaging](#)

[Available Terminals for Snap-in and Screw Mount Type](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Chemi-Con:

[EMVH630GTR471MLN0S](#) [EMVH630BTR471MLN0S](#) [EMVH630GTR721MMN0S](#) [EMVH350GTR681MMH0S](#)  
[EMVH101ADA330MJA0G](#) [EMVH201GTR470MMN0S](#) [EMVH350GTR331MLH0S](#) [EMVH250ADA331MJA0G](#)  
[EMVH101GTR221MMN0S](#) [EMVH250ADA330MF60G](#) [EMVH350ADA470MHA0G](#) [EMVH350ARA331MKD5G](#)  
[EMVH500ADA470MJA0G](#) [EMVH630ADA100MF80G](#) [EMVH100GDA222MMH0S](#) [EMVH100GDA472MMN0S](#)  
[EMVH500GDA471MMH0S](#) [EMVH250ADA470MF80G](#) [EMVH101GDA101MLH0S](#) [EMVH101ADA100MHA0G](#)  
[EMVH451GDA100MMN0S](#) [EMVH401GDA100MLN0S](#) [EMVH500GDA221MLH0S](#) [EMVH401GDA100MMH0S](#)  
[EMVH101ADA220MJA0G](#) [EMVH161GDA220MLH0S](#) [EMVH201GDA220MLH0S](#) [EMVH251GDA220MLN0S](#)  
[EMVH630ADA100MH63G](#) [EMVH160GDA681MLH0S](#) [EMVH250GDA681MMH0S](#) [EMVH350GDA331MLH0S](#)  
[EMVH500GDA331MLH0S](#) [EMVH201GDA470MMN0S](#) [EMVH100GDA332MMH0S](#) [EMVH500ADA330MHA0G](#)  
[EMVH451GDA4R7MLH0S](#) [EMVH201GDA330MMH0S](#) [EMVH350ADA101MJA0G](#) [EMVH250ADA101MHA0G](#)  
[EMVH350ADA100MF60G](#) [EMVH250GDA102MMN0S](#) [EMVH350ADA330MH63G](#) [EMVH100ADA221MHA0G](#)  
[EMVH100GDA222MLH0S](#) [EMVH500ADA220MF80G](#) [EMVH251GDA220MMH0S](#) [EMVH160GDA102MMH0S](#)  
[EMVH350ADA330MF80G](#) [EMVH630GDA471MLN0S](#) [EMVH401GDA6R8MLH0S](#) [EMVH350ADA220MF60G](#)  
[EMVH250ADA221MJA0G](#) [EMVH161GDA680MMN0S](#) [EMVH101GDA221MMN0S](#) [EMVH630GDA331MLH0S](#)  
[EMVH630ADA330MJA0G](#) [EMVH250ADA470MH63G](#) [EMVH630ADA220MHA0G](#) [EMVH100ADA101MH63G](#)  
[EMVH500ADA100MF60G](#) [EMVH201GDA330MLN0S](#) [EMVH251GDA330MMN0S](#) [EMVH161GDA330MMH0S](#)  
[EMVH160ADA470MF60G](#) [EMVH250GDA471MLH0S](#) [EMVH350GDA471MLH0S](#) [EMVH350GDA681MMH0S](#)  
[EMVH250GDA681MLH0S](#) [EMVH160GDA222MMH0S](#) [EMVH500ADA220MH63G](#) [EMVH500BTR471MMH0S](#)  
[EMVH630GTR331MLH0S](#) [EMVH250ADA221MHA0G](#) [EMVH800ADA470MJA0G](#) [EMVH100ADA221MHA0N](#)  
[EMVH500GTR471MMH0S](#) [EMVH630ADA470MHA0G](#) [EMVH350ADA101MHA0G](#) [EMVH630ADA470MJA0G](#)  
[EMVH250ADA101MF80G](#) [EMVH161ATR680MMN0S](#) [EMVH160ADA101MHA0G](#) [EMVH500ADA330MF80G](#)  
[EMVH101GDA330MJA0G](#) [EMVH101ATR101MLH0S](#) [EMVH500GRA221MKE0S](#) [EMVH500ADA470MHA0G](#)  
[EMVH500ATR331MKG5S](#) [EMVH100ADA101MF80G](#) [EMVH350ADA221MJA0G](#) [EMVH100ADA331MJA0G](#)  
[EMVH401GRA100MLN0S](#) [EMVH201GRA470MMN0S](#) [EMVH101GRA221MMN0S](#) [EMVH500ADA101MJA0G](#)  
[EMVH350ARA221MJA0G](#) [EMVH500ARA470MHA0G](#) [EMVH160ARA331MJA0G](#) [EMVH250ARA101MHA0G](#)