



Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

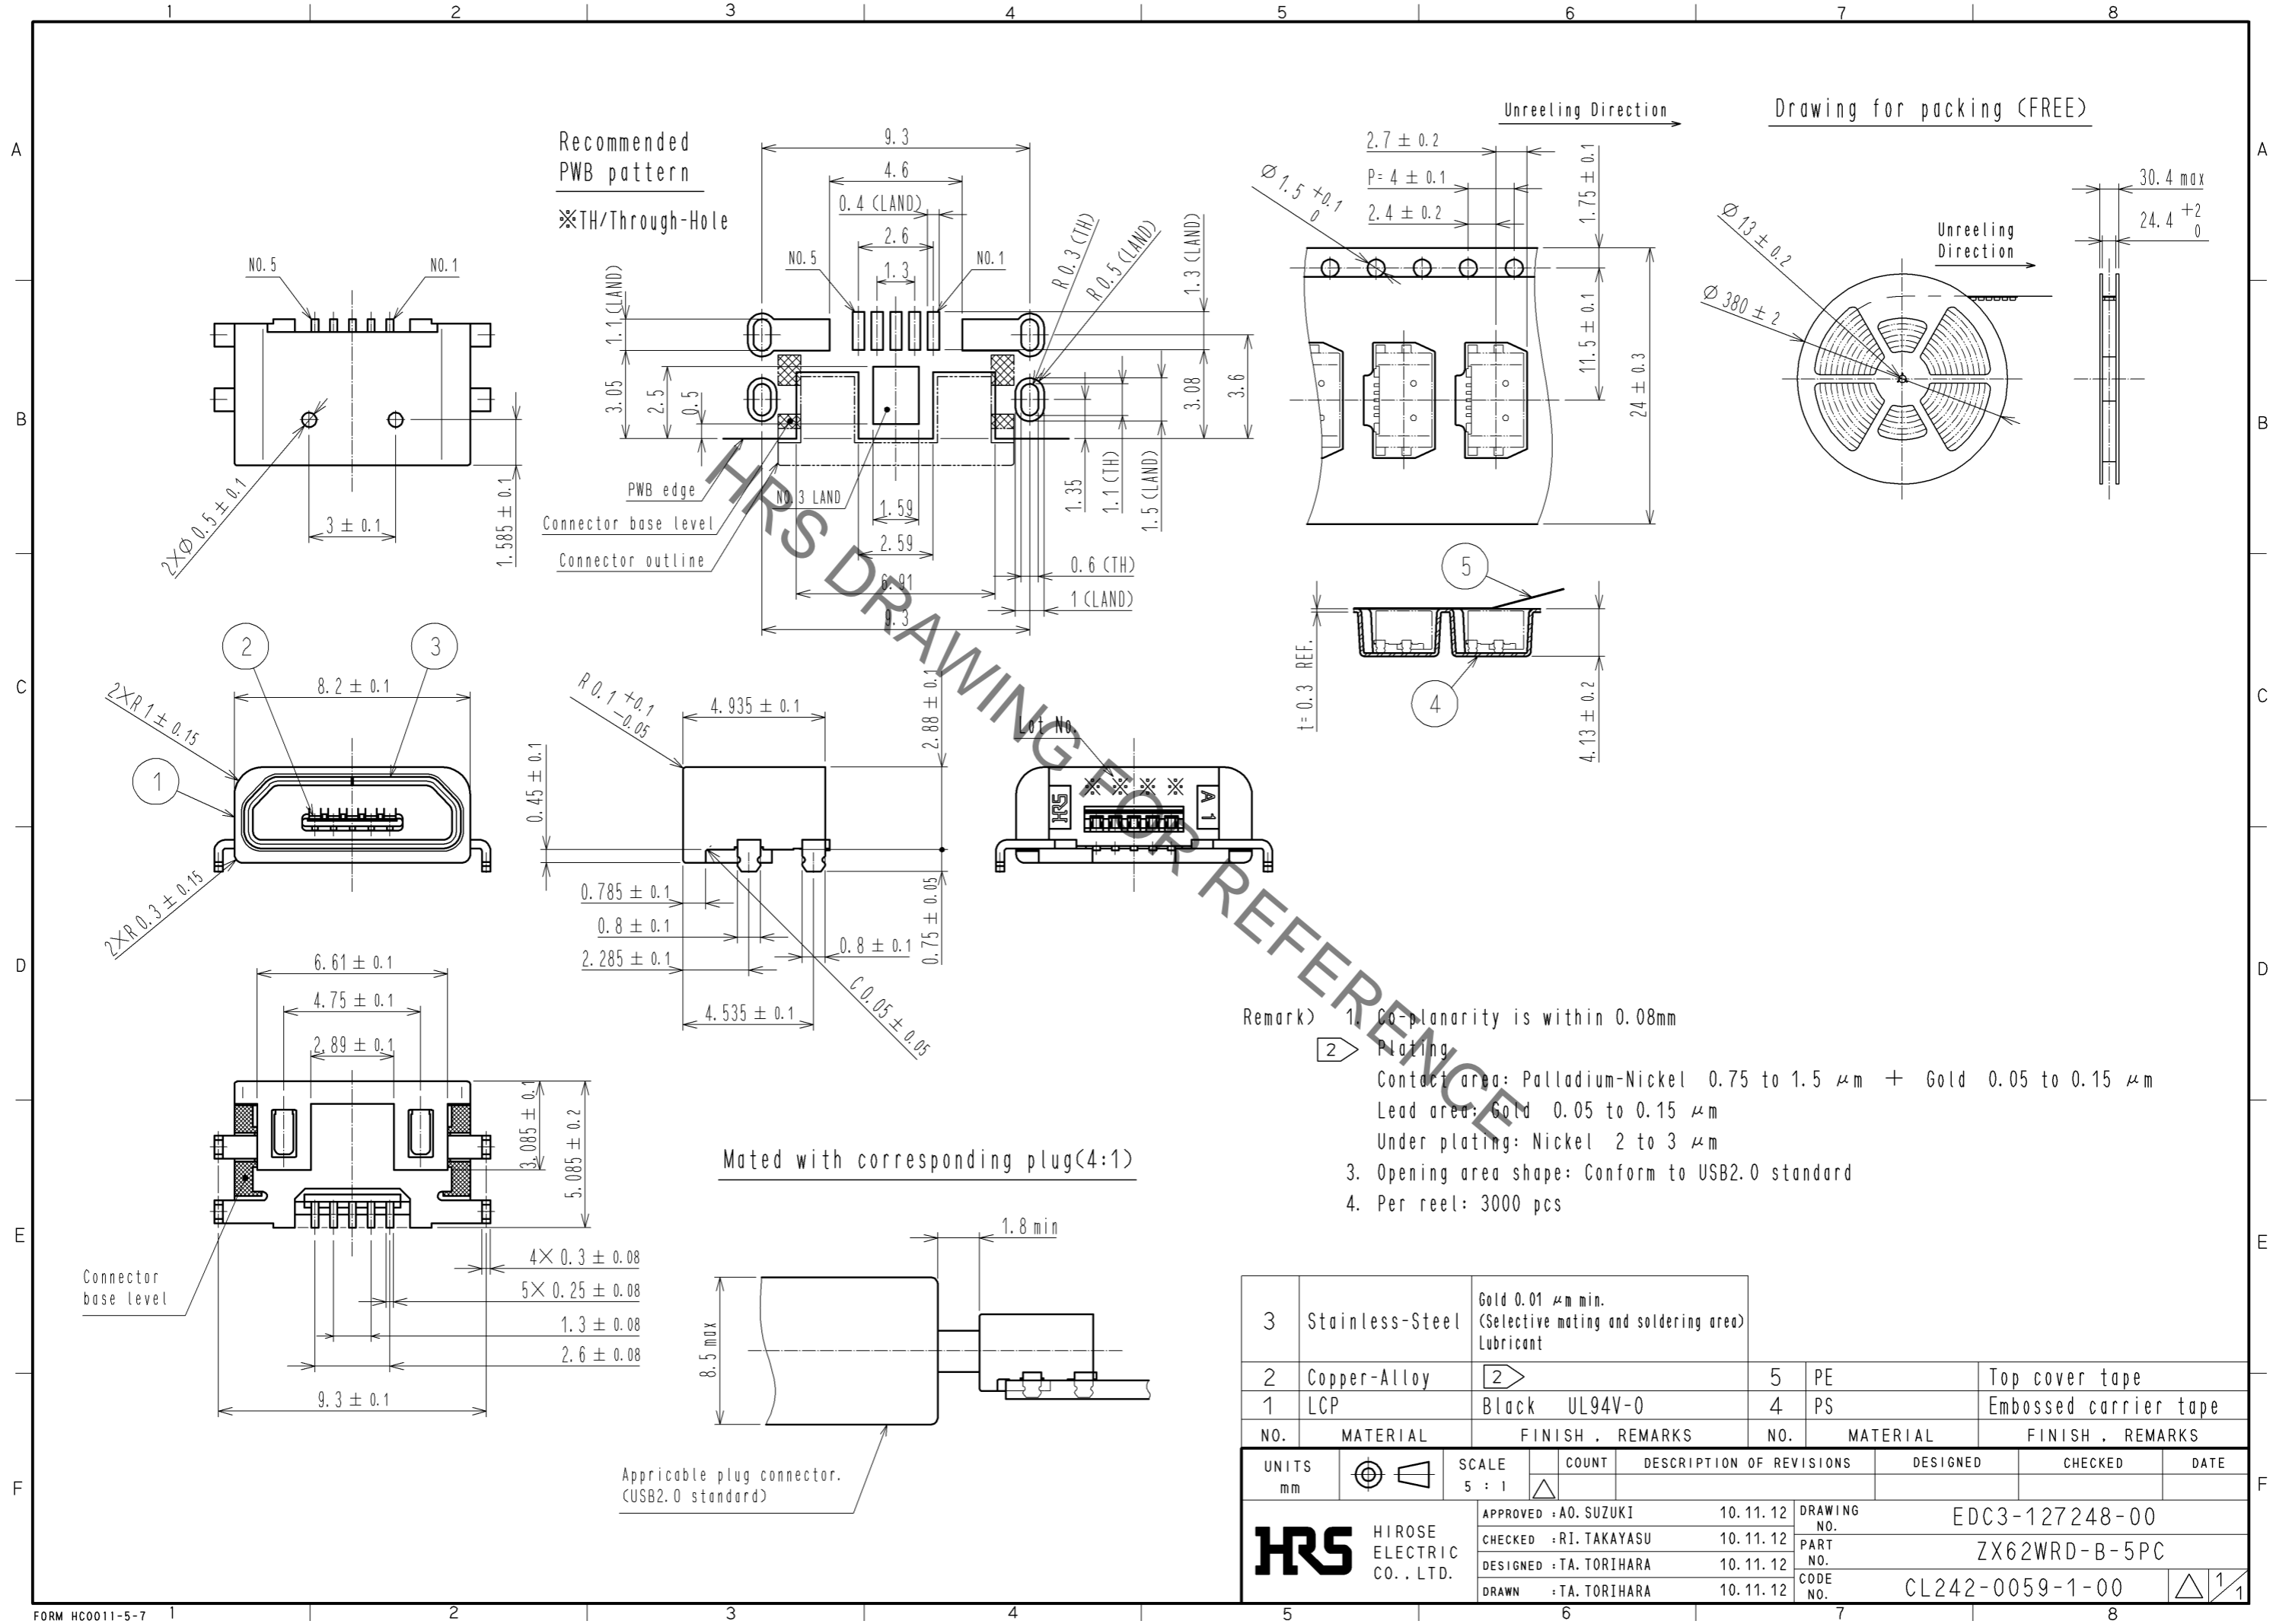

- Remark)
- 1) Co-planarity is within 0.08mm
 - 2) Plating
 Contact area: Palladium-Nickel 0.75 to 1.5 μm + Gold 0.05 to 0.15 μm
 Lead area: Gold 0.05 to 0.15 μm
 Under plating: Nickel 2 to 3 μm
 - 3. Opening area shape: Conform to USB2.0 standard
 - 4. Per reel: 3000 pcs

Mated with corresponding plug(4:1)

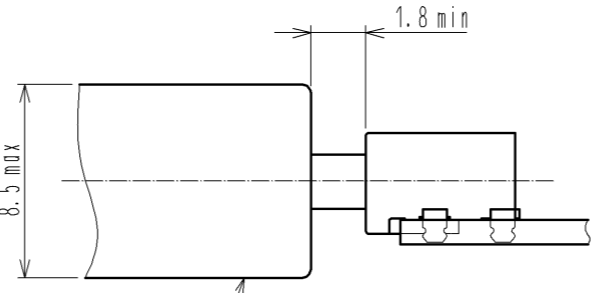

Applicable plug connector.
(USB2.0 standard)

3	Stainless-Steel	Gold 0.01 μm min. (Selective mating and soldering area) Lubricant	5	PE	Top cover tape			
2	Copper-Alloy	2	4	PS	Embossed carrier tape			
1	LCP	Black UL94V-0						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	5 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS		HIROSE ELECTRIC CO., LTD.	APPROVED : A0. SUZUKI	10.11.12	DRAWING NO.	EDC3-127248-00		
			CHECKED : RI. TAKAYASU	10.11.12	PART NO.	ZX62WRD-B-5PC		
			DESIGNED : TA. TORIHARA	10.11.12	CODE NO.	CL242-0059-1-00		
			DRAWN : TA. TORIHARA	10.11.12				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[ZX62WRD-B-5PC](#)