

EVA-SS

~15° smooth spot beam. Assembly with holder and installation tape.

SPECIFICATION:

Dimensions	Ø 37.7 mm
Height	17.2 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish
EVA-SS	Single lens	PMMA	clear	
EVA-HLD-PIN	Holder	PC	black	
SPUTNIK-TAPE3	Tape	Acrylic foam	black	


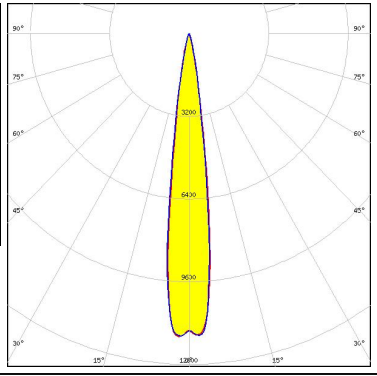

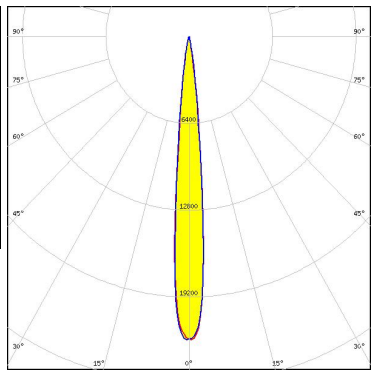

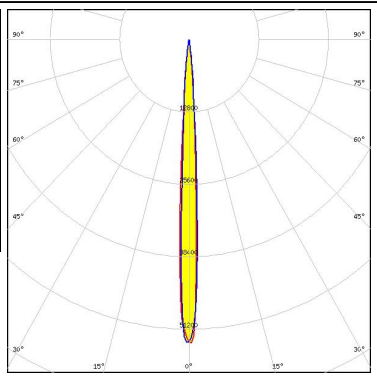

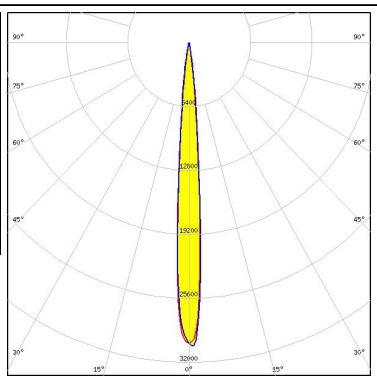
ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CA16256_EVA-SS	Single lens	675	90	45	10.0
» Box size: 480 x 280 x 300 mm					

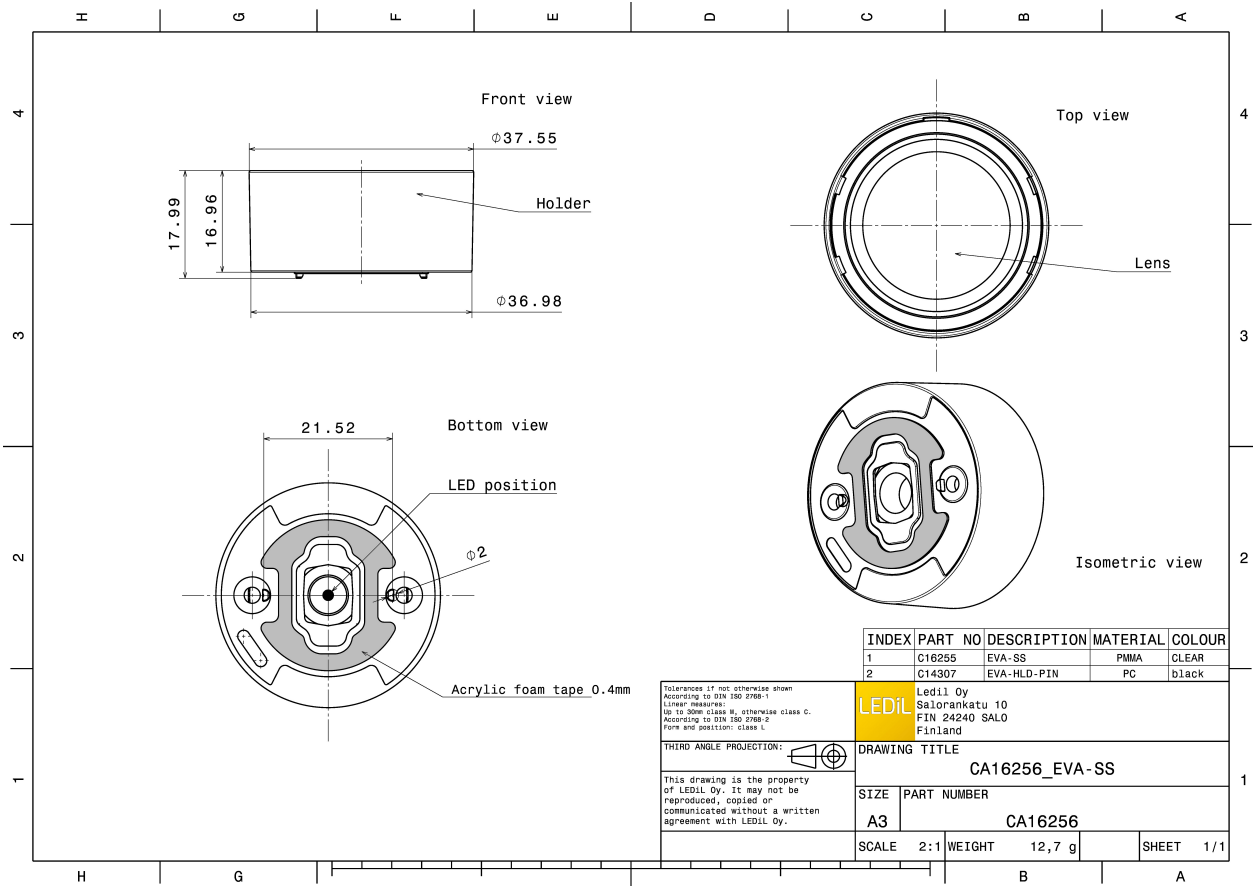
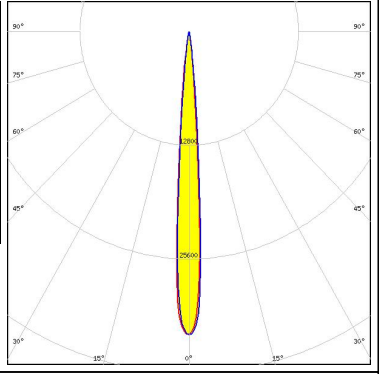
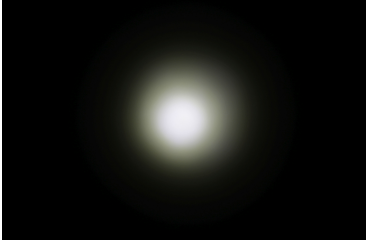
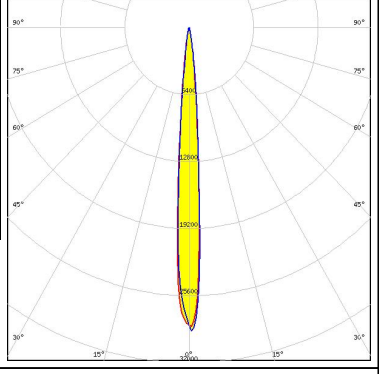

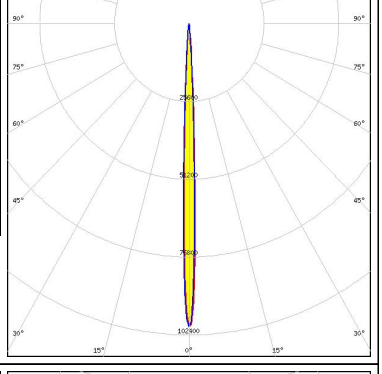

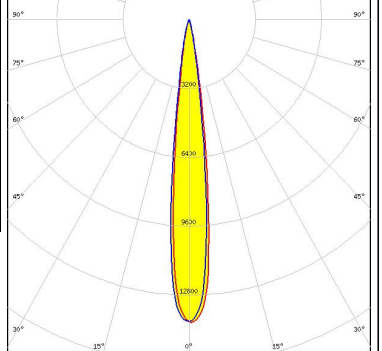


See also our general installation guide: www.ledil.com/installation_guide


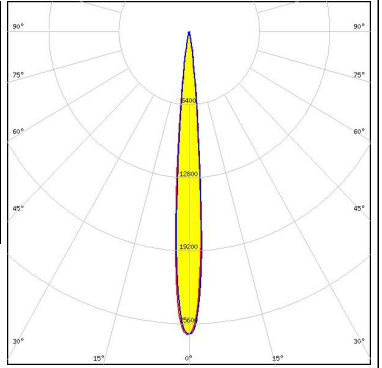
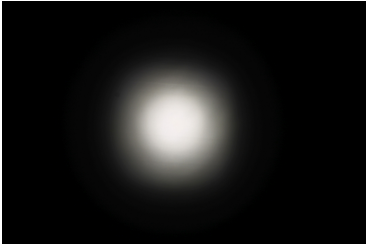
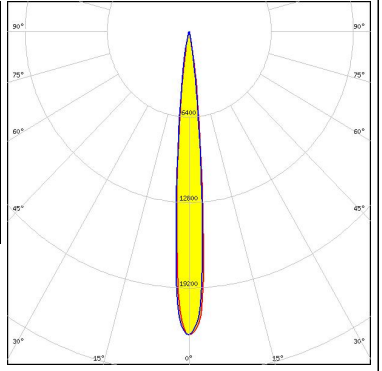

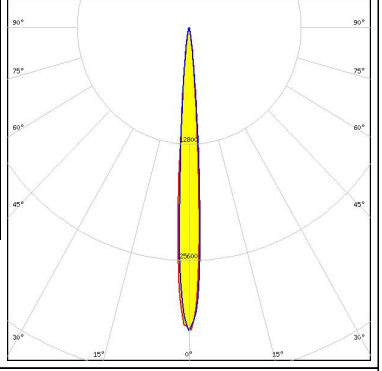

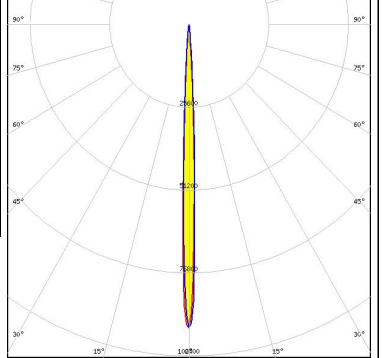
OPTICAL RESULTS (MEASURED):

<p>CREE LEDs</p> <p>LED XHP35 HD FWHM / FWTM 14.0° / 25.0° Efficiency 92 % Peak intensity 18 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE LEDs</p> <p>LED XHP35 HI FWHM / FWTM 10.0° / 19.0° Efficiency 93 % Peak intensity 22 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE LEDs</p> <p>LED XP-E FWHM / FWTM 6.0° / 13.0° Efficiency 93 % Peak intensity 53.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE LEDs</p> <p>LED XP-G2 FWHM / FWTM 8.0° / 17.0° Efficiency 93 % Peak intensity 30 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

OPTICAL RESULTS (MEASURED):

<p>CREE LEDs</p> <p>LED: XP-L HI FWHM / FWTM: 8.0° / 15.0° Efficiency: 93 % Peak intensity: 34.2 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>CREE LEDs</p> <p>LED: XT-E FWHM / FWTM: 8.0° / 17.0° Efficiency: 91 % Peak intensity: 29 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>LUMILEDS</p> <p>LED: LUXEON CZ FWHM / FWTM: 4.0° / 9.0° Efficiency: 94 % Peak intensity: 99.8 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>LUMILEDS</p> <p>LED: LUXEON V FWHM / FWTM: 13.0° / 23.0° Efficiency: 91 % Peak intensity: 14 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		

OPTICAL RESULTS (MEASURED):


<p>LUMILEDS</p> <p>LED LUXEON V2 FWHM / FWTM 9.0° / 17.0° Efficiency 92 % Peak intensity 26.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW219F FWHM / FWTM 10.0° / 19.0° Efficiency 92 % Peak intensity 22.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED OSCONIQ P 3737 (2W version) FWHM / FWTM 8.0° / 15.0° Efficiency 94 % Peak intensity 33.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED OSLON Black Flat (LUW HWQP) FWHM / FWTM 4.0° / 9.0° Efficiency 94 % Peak intensity 94 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

OPTICAL RESULTS (MEASURED):

OSRAM

Opto Semiconductors



LED OSLOM Square CSSRM2/CSSRM3
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 92 %
 Peak intensity 32 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

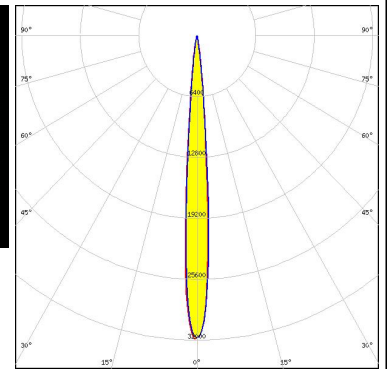

OSRAM

Opto Semiconductors


LED OSLOM Square EC
 FWHM / FWTM 8.0° / 15.0°
 Efficiency 91 %
 Peak intensity 33.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

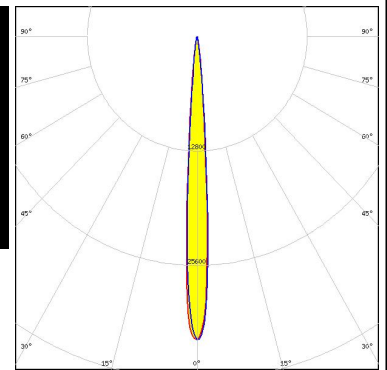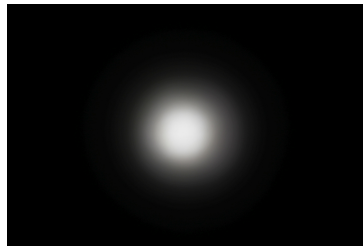

OSRAM


Opto Semiconductors

LED OSLOM SSL 150
 FWHM / FWTM 5.0° / 12.0°
 Efficiency 93 %
 Peak intensity 63 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

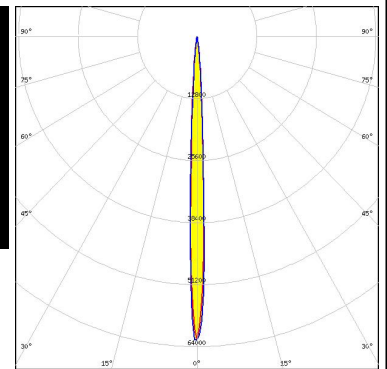

SAMSUNG



LED LH181A
 FWHM / FWTM 7.0° / 16.0°
 Efficiency 87 %
 Peak intensity 28.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

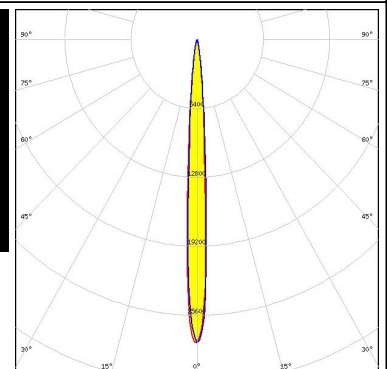

OPTICAL RESULTS (MEASURED):



SAMSUNG

LED LH181B
 FWHM / FWTM 7.8° / 16.0°
 Efficiency 92 %
 Peak intensity 31 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

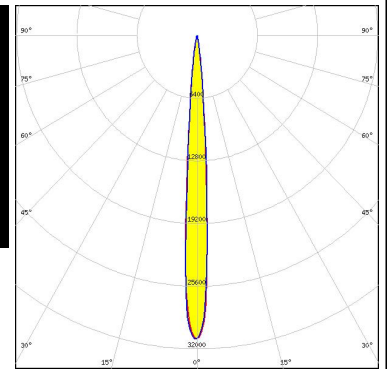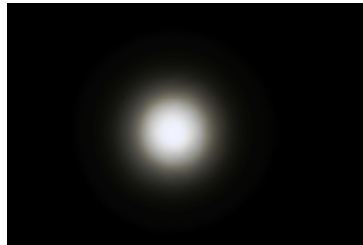


SAMSUNG

LED LH351B
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 93 %
 Peak intensity 24.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

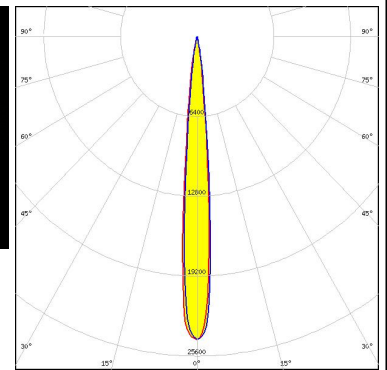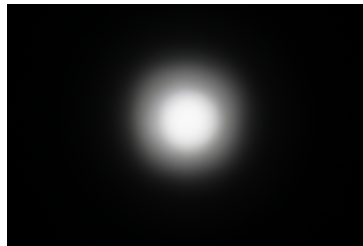

SEOUL SEMICONDUCTOR


LED nPola
 FWHM / FWTM 5.0° / 9.0°
 Efficiency 94 %
 Peak intensity 94 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

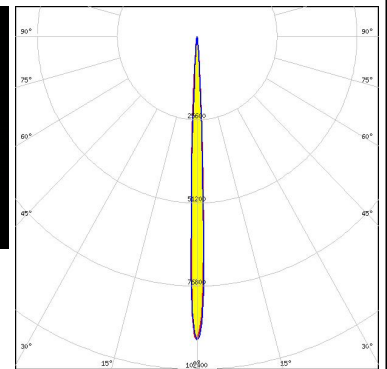


OPTICAL RESULTS (SIMULATED):




LED XE-G
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 92 %
 Peak intensity 30.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

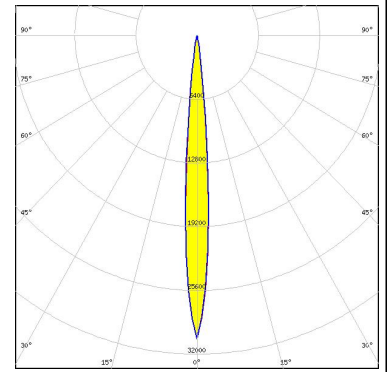


LED XHP50.2
 FWHM / FWTM 20.0° / 34.0°
 Efficiency 90 %
 Peak intensity 6.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

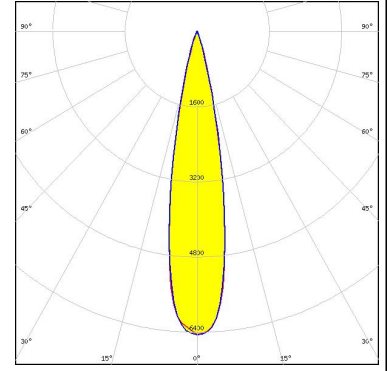

LED XP-E2
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 93 %
 Peak intensity 34.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

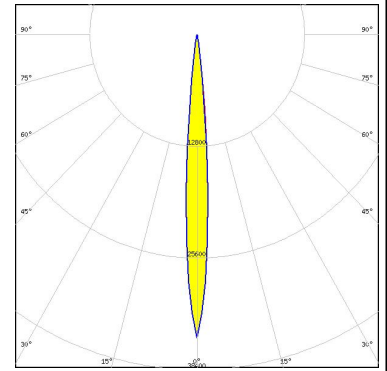


LED XP-P
 FWHM / FWTM 8.0° / 14.0°
 Efficiency 94 %
 Peak intensity 37.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

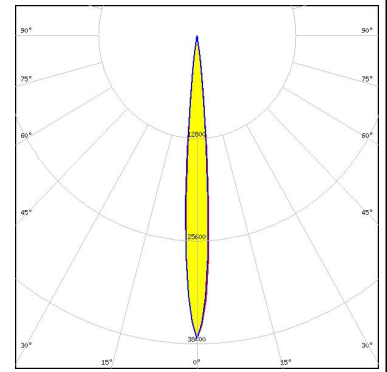

OPTICAL RESULTS (SIMULATED):



LED	LUXEON MZ
FWHM / FWTM	14.0° / 24.0°
Efficiency	94 %
Peak intensity	13.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

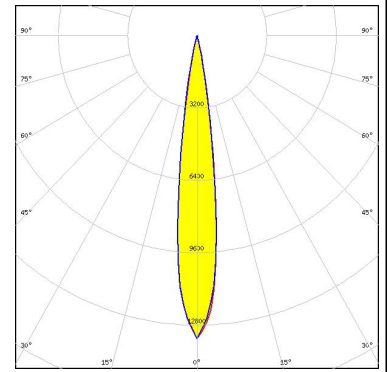

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ledi:](#)

[CA16256_EVA-SS](#)