

Isolation Power Transformers

EE5 Platform SMD



- Push Pull Converter Transformer
- Operational Insulation
- 1.5KVrms isolation
- Compact and cost effective industrial design
- Output: 1.0W max

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C




Part Number	Inductance (1-3) ($\mu\text{H} \pm 35\%$)	Leakage Inductance (1-3) with (4-6) shorted ($\mu\text{H} \text{ MAX}$)	Capacitance (1, 2, 3) to (4, 5, 6) ($\text{pF} \text{ MAX}$)	DCR (1-3) ($\Omega \text{ MAX}$)	DCR (4-6) ($\Omega \text{ MAX}$)	MAX (1-3) ¹ (V- $\mu\text{sec} \text{ Max}$)	Turns Ratio (1:3) (6:4)	Isolated Voltage (Vrms)
PH9084.011NL	456	3.0	15	2.0	2.0	37	1CT : 1CT	1500
PH9084.034NL	256	3.0	15	1.6	2.0	28	3CT : 4CT	
PH9084.043NL	456	3.0	15	2.0	2.0	37	4CT : 3CT	
PH9084.021NL	456	3.0	15	2.0	1.2	37	2CT : 1CT	

- Notes:**
- The maximum volt-use rating limits the peak flux density to 3600 gauss when used in bi-polar drive application with 200KHz. For unipolar drive applications or a bi-polar drive with 350kHz, a maximum volt-use could be 60% of the listed value. For Push-Pull topology, where the voltage is applied across half the primary winding turns, the maximum volts-use needs to be derated by 50%.
 - Optional Tape & Reel packing can be ordered by adding a "T" suffix to the part number (i.e. PH9084.011NL becomes PH9084.011NLT). Pulse complies to industry standard tape and reel specification EIA481.
 - The "NL" suffix indicates an RoHS-compliant part number.


Mechanical

Schematic


PH9084.XXXNL

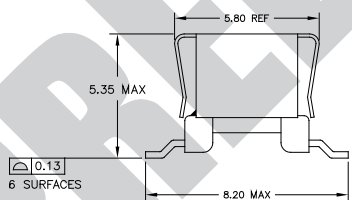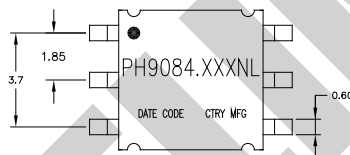

FINAL OUTLINE

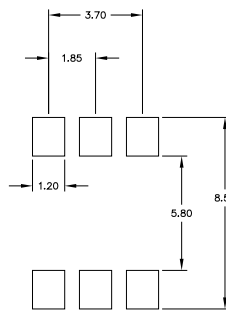

SUGGESTED LAND PATTERN



Weight0.37grams
 Tape & Reel1000/reel
 Tray120/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PH9084.034NLT](#) [PH9084.011NLT](#) [PH9084.043NLT](#) [PH9084.021NLT](#)