BAF Series

13/32" x 1-1/2" 250Vac Fast-acting supplemental fuses



250Vac 1/4 to 30A

Description

Fast-acting, supplemental fuse.

For superior protection, Bussmann recommends upgrading to Low-Peak™ Class CC fuses. See data sheet # 1023.

Catalog symbol - color code

· BAF - Green (250Vac max 1/4 to 30A)

Ratings

| | Interrupting Rating at System Voltage | | Agency Information | |
|-------------------|--|------------|-----------------------|-----|
| Fuse Amp Range | 250 Vac | 125 Vac | UL | CSA |
| 1/4 to 1 | 35A | 10kA | - | X |
| 1-1/2 to 2-1/2 | 100A | 10kA | - | X |
| 3 | 100A | 10kA | Х | X |
| 4 to 10 | 200A | 10kA | Х | X |
| 12 to 15 | 750A | 10kA | Х | Χ |
| 20 to 30 | 200A | 10kA | - | - |

Agency information

- · CE
- UL Listed, Std. 248-14, 250Vac (3 to 15A) Guide JDYX, File E19180
- CSA Certified, 250Vac (1/4 to 15A) Class 1422-01, File 53787


Catalog numbers (amps)

| BAF-1/4 | BAF-1-8/10 | BAF-6 | BAF-12 |
|-----------|------------|-----------|--------|
| BAF-1/2 | BAF-2 | BAF-6-1/4 | BAF-15 |
| BAF-6/10 | BAF-2-1/2 | BAF-7 | BAF-20 |
| BAF-8/10 | BAF-3 | BAF-8 | BAF-25 |
| BAF-1 | BAF-4 | BAF-9 | BAF-30 |
| BAF-1-1/2 | BAF-5 | BAF-10 | |

Carton quantity

| Amps | Qty | |
|-----------|-----|--|
| 1/4 to 30 | 10 | |

Dimensions - in (mm)



Features

- Color coded green for 250Vac maximum voltage rating
- · Fiber tube construction
- · Nickel-plated brass endcaps.

Typical applications

- · General purpose circuits
- · Lighting circuit protection
- · Meter circuits

Recommended fuse blocks/fuse holders


Danauludian

Data Chast #

| Series | Description | Data Sheet # | | | |
|----------------------------|---|--------------|--|--|--|
| Blocks | | | | | |
| BMM Series | 1-, 2- & 3-Pole modular blocks with optional covers | 10235 | | | |
| BM Series | 1-, 2- & 3-Pole blocks | 1104 | | | |
| DIN | N-Rail Holders / Switches | 5 | | | |
| CCP30M | 1-, 2- & 3-Pole switch | 1157 | | | |
| CHM Series | 1-, 2- & 3-Pole | 3185 | | | |
| Optima NG | 3-Pole protection module | 1109 | | | |
| Optima | 3-Pole holder | 1102 | | | |
| Optima | 3-Pole holder + switch | 1103 | | | |
| | Panel Mount Holders | | | | |
| HPM & HPM-D | 1-Pole holder | 2112 | | | |
| HPC-D | 1-Pole holder | 2109 | | | |
| HPS2 | 2-Pole holder | 2140 | | | |
| HPF, HPF-C & HPF-WT | 1-Pole holder | 2114 | | | |
| HPS | 1-Pole holder | 2113 | | | |
| HPG & HPD | 1-Pole holder | 2108 | | | |
| | In-line Holders | | | | |
| HEB | 1-Pole holder | 2127 | | | |
| HEX | 2-Pole holder | 2126 | | | |
| | Fuseclips | | | | |
| 1A3400, 5956 & 5960 Series | PCB Fuseclips | 2132 | | | |
| | Fuse Covers | | | | |
| SAMI-7 | Finger-safe fuse cover | 1204 | | | |
| | | | | | |

Bussmann by FAT.N

Time-current characteristic curves - total clear

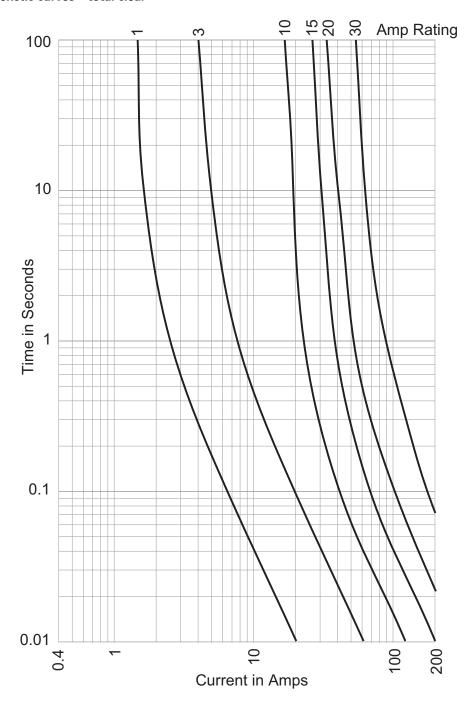

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton's Bussmann Business 114 Old State Road

114 Old State Road Ellisville, MO 63021 United States www.Bussmann.com

© 2014 Eaton All Rights Reserved Publication No. 2011 - BU-SB14288 April 2014



All other trademarks are property of their respective owners.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

BAF-15 BAF-30 BAF-10