

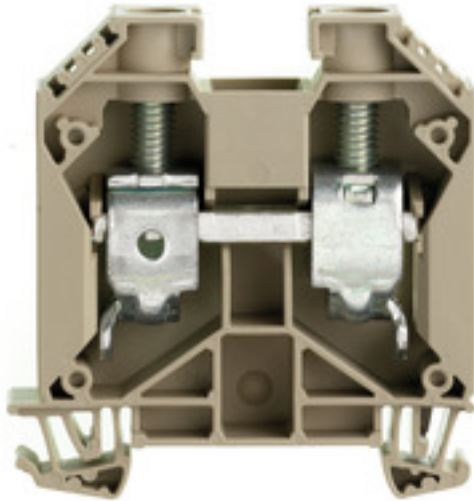
WDU 35**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Power feed-in**

Our wide range of W-Series terminal blocks with our WPD main line branch terminals, which are optimised to guarantee both convenience and space gains, ensures a secure and convenient connection at the power feed-in.

General ordering data

| | |
|------------|---|
| Version | Feed-through terminal, Screw connection, 35 mm ² , 1000 V, 125 A, dark beige |
| Order No. | 1020500000 |
| Type | WDU 35 |
| GTIN (EAN) | 4008 190077013 |
| Qty. | 40 pc(s). |

Creation date December 27, 2020 9:05:14 AM CET

Catalogue status 08.12.2020 / We reserve the right to make technical changes.

WDU 35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------------------------|------------|----------------|------------|
| Depth | 62.5 mm | Depth (inches) | 2.461 inch |
| Depth including DIN rail | 63 mm | Height | 60 mm |
| Height (inches) | 2.362 inch | Net weight | 51.38 g |
| Weight | 54 g | Width | 16 mm |
| Width (inches) | 0.63 inch | | |

Temperatures

| | | |
|---------------------|-----------------------------|---|
| Storage temperature | Operating temperature range | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity |
| | -25 °C...55 °C | |

Material data

| | | | |
|---------------------------|-------|--------|------------|
| Material | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0 | | |

Rating data IECEx/ATEX

| | | | |
|--------------------------------|---|---------------------------------|--------------------|
| Certificate No. (ATEX) | DEMKO14ATEX1338U | Certificate No. (IECEX) | IECEXULD14.0005U |
| Max. voltage (ATEX) | 690 V | Current (ATEX) | 115 A |
| Wire cross section max. (ATEX) | 35 mm ² | Max. voltage (IECEX) | 690 V |
| Current (IECEX) | 115 A | Wire cross section max. (IECEX) | 35 mm ² |
| Operating temperature range | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7 | |
| Ex 2014/34/EU label | II 2 G D | | Ex eb II C Gb |

System specifications

| | | | |
|-------------------------------------|---|-------------------------------|-----|
| Version | Screw connection, for screwable cross-connection, One end without connector | End cover plate required | Yes |
| Number of potentials | 1 | Number of levels | 1 |
| Number of clamping points per level | 2 | Number of potentials per tier | 1 |
| Levels cross-connected internally | No | PE connection | No |
| Rail | TS 35 | N-function | No |
| PE function | No | PEN function | Yes |

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

| | | | |
|--|---------------------|--|---------------------|
| Cross-section for connected wire, stranded, two clampable wires, max. | 16 mm ² | Cross-section for connected wire, stranded, two clampable wires, min. | 16 mm ² |
| Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max. | 16 mm ² | Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min. | 2.5 mm ² |
| Wire connection cross section, finely stranded, two clampable wires, min. | 2.5 mm ² | Wire cross-section, finely stranded, two clampable wires, max. | 16 mm ² |

Additional technical data

| | | | |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | Yes | Number of similar terminals | 1 |
| Open sides | right | Type of mounting | Snap-on |

Creation date December 27, 2020 9:05:14 AM CET

Catalogue status 08.12.2020 / We reserve the right to make technical changes.

WDU 35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

CSA rating data

| | | | |
|-----------------------|----------------|-------------------------------|---------|
| CSA_current_Print | 150 A | CSA_voltage_Print | 1,000 V |
| CSA_wire_max_Print | 12 AWG | CSA_wire_min_Print | 12 AWG |
| Certificate No. (CSA) | 200039-1057876 | Current size C (CSA) | 150 A |
| Voltage size C (CSA) | 600 V | Wire cross section min. (CSA) | 12 AWG |

Conductors for clamping (rated connection)

| | | | | | |
|--|--|------------------------------|------------------------------|-----------------------|-------|
| Blade size | 6.5 x 1.2 mm | | | | |
| Clampable conductor | Connection specification | | Screw connection | | |
| | Cross-section for conductor connection | | Type | solid, H05(07) V-U | |
| | | | min. | 2.5 mm ² | |
| | | | max. | 16 mm ² | |
| | | | nominal | 35 mm ² | |
| | wire end ferrule | | Stripping length | min. | 18 mm |
| | | | | max. | 18 mm |
| | | | | nominal | 18 mm |
| | | | Tightening torque | min. | 4 Nm |
| | | | | max. | 5 Nm |
| | | | Recommended wire-end ferrule | | |
| | Connection specification | | Screw connection | | |
| | Cross-section for conductor connection | | Type | stranded, H07V-R | |
| | | | min. | 2.5 mm ² | |
| | | | max. | 50 mm ² | |
| | | | nominal | 35 mm ² | |
| | wire end ferrule | | Stripping length | min. | 18 mm |
| | | | | max. | 18 mm |
| | | | | nominal | 18 mm |
| | | | Tightening torque | min. | 4 Nm |
| | | | | max. | 5 Nm |
| | | | Recommended wire-end ferrule | | |
| | Connection specification | | Screw connection | | |
| | Cross-section for conductor connection | | Type | flexible, H05(07) V-K | |
| | | min. | 2.5 mm ² | | |
| | | max. | 35 mm ² | | |
| | | nominal | 35 mm ² | | |
| wire end ferrule | | Stripping length | min. | 18 mm | |
| | | | max. | 18 mm | |
| | | | nominal | 18 mm | |
| | | Tightening torque | min. | 4 Nm | |
| | | | max. | 5 Nm | |
| | | Recommended wire-end ferrule | | | |
| Clamping range, max. | 50 mm ² | | | | |
| Clamping range, min. | 2.5 mm ² | | | | |
| Clamping screw | M 6 | | | | |
| Connection cross-section, stranded, max. | 50 mm ² | | | | |
| Connection cross-section, stranded, min. | 2.5 mm ² | | | | |
| Connection direction | on side | | | | |
| Gauge to IEC 60947-1 | B8 | | | | |
| Number of connections | 2 | | | | |
| Stripping length | 18 mm | | | | |
| Tightening torque, max. | 5 Nm | | | | |

Creation date December 27, 2020 9:05:14 AM CET

WDU 35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

| | |
|---|---------------------|
| Tightening torque, min. | 4 Nm |
| Twin wire-end ferrules, max. | 16 mm ² |
| Twin wire-end ferrules, min. | 1.5 mm ² |
| Type of connection | Screw connection |
| Wire connection cross section AWG, max. | AWG 2 |
| Wire connection cross section AWG, min. | AWG 12 |
| Wire connection cross section, finely stranded, max. | 35 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 35 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 2.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 35 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 2.5 mm ² |
| Wire connection cross-section, solid core, max. | 16 mm ² |
| Wire connection cross-section, solid core, min. | 2.5 mm ² |

General

| | | | |
|---|-------|---|---------------|
| Rail | TS 35 | Standards | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 2 | Wire connection cross section AWG, min. | AWG 12 |

Rating data

| | | | |
|---------------------------------|--------------------|--|---------|
| Rated cross-section | 35 mm ² | Rated voltage | 1,000 V |
| Rated current | 125 A | Current at maximum wires | 150 A |
| Standards | IEC 60947-7-1 | Volume resistance according to IEC 60947-7-x | 0.26 mΩ |
| Rated impulse withstand voltage | 8 kV | Pollution severity | 3 |
| Surge voltage category | III | | |

UL rating data

| | | | |
|---|--------|---|---------|
| Certificate No. (UR) | E60693 | Conductor size Factory wiring max. (UR) | 0 AWG |
| Conductor size Factory wiring min. (UR) | 12 AWG | Conductor size Field wiring max. (UR) | 0 AWG |
| Conductor size Field wiring min. (UR) | 12 AWG | Current size C (UR) | 150 A |
| UL_current_Print | 150 A | UL_voltage_Print | 1,000 V |
| UL_wire_max_Print | 0 AWG | UL_wire_min_Print | 12 AWG |
| Voltage size C (UR) | 1000 V | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000897 | ETIM 7.0 | EC000897 |
| ECLASS 9.0 | 27-14-11-20 | ECLASS 9.1 | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |

WDU 35

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



| | |
|-----------------------|---------|
| ROHS | Conform |
| UL File Number Search | E60693 |

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | Attestation of Conformity IECEX Certificate CB Testreport CB Certificate EAC certificate DNVGL certificate NEMKO certificate INMETRO certificate Lloyds Register Certificate MARITREG Certificate POLSKIREJ certificate EAC EX Certificate CCC Ex Certificate Declaration of Conformity ATEX Certificate Declaration of Conformity |
| Brochure/Catalogue | CAT 1 TERM 16/17 EN |
| Engineering Data | STEP |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| User Documentation | NTI WDU/WPE 35.pdf StorageConditionsTerminalBlocks |

Data sheet

WDU 35

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

