

NX3225GA


For OA / AV

■ Features

A small surface-mount type crystal unit, especially suited for small-sizing requirements.

- Compact and thin. (3.2 x 2.5 x 0.75 mm typ.)
- Excellent environmental characteristics, including heat and shock resistance.
- Excellent electrical performance for OA (office automation) and AV (audiovisual) applications.
- Meets the requirements for re-flow profiling using lead-free solder.

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

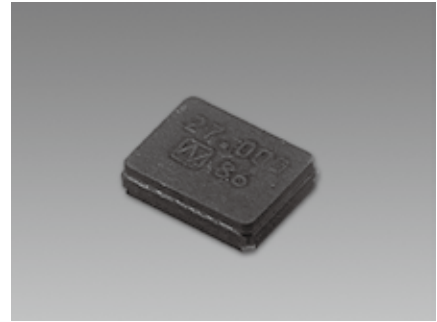

■ Specifications

Item	Model	NX3225GA	
		Standard	Optional
Standard		Standard	Optional
Nominal Frequency (MHz)		$9.840 \leq F \leq 50$	$9.840 \leq F \leq 50$
Overtone Order		Fundamental	Fundamental
Frequency Tolerance (25 ±3 °C)		$\pm 20 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
Frequency versus Temperature Characteristics (with reference to +25 °C)		$\pm 30 \times 10^{-6}$	$\pm 30 \times 10^{-6}$ (Temp extended case, *1)
Operating Temperature Range (°C)		-40 to +85	-40 to +85 *1
Storage Temperature Range (°C)		-40 to +85	-40 to +85
Equivalent Series Resistance		Refer to *2	Refer to *2
Level of Drive (µW)		10 (Max. 200)	10 (Max. 200)
Load Capacitance (pF)		8	6 to 32
Frequency Aging (+25 °C)		---	Max. $\pm 10 \times 10^{-6}$ / year *1
Specifications Number		STD-CRG-2	Refer to *3

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.

*1 If you have any other requests, NDK will study it.

*3 Ordering information: Overtone Order Fundamental / 3rd Overtone, the Operating Temperature Range, Frequency versus Temperature Characteristics, Frequency Tolerance, and Load Capacitance.

Ex. Model, Frequency (38.400000MHz 6digits), S1:Fundamental or S3:3rd Overtone

- Operating Temperature Range (-40 to +85°C) - Frequency versus Temperature Characteristics ($\pm 30 \times 10^{-6}$)


- Frequency Tolerance ($\pm 20 \times 10^{-6}$) - Load Capacitance (8pF)

NX3225GA

38.400000MHz

S1-4085-30-20-8

■ Dimensions

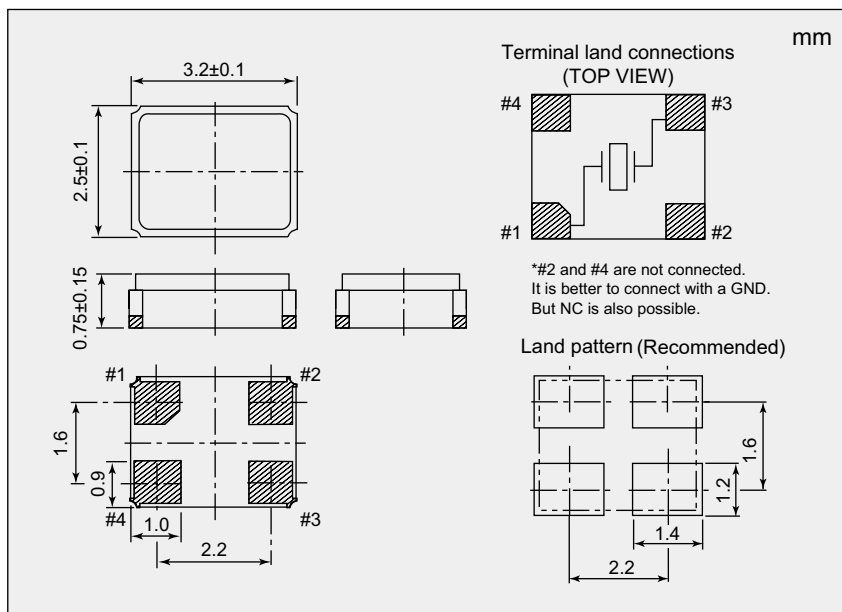

*2 Equivalent Series Resistance

Nominal Frequency (MHz)	Equivalent Series Resistance Max. (Ω)
$9.840 \leq F < 12$	200
$12 \leq F < 13$	100
$13 \leq F < 20$	80
$20 \leq F \leq 50$	50

If you have any other requests, NDK will study it.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NDK:](#)

[NX3225GA-12.000M-STD-CRG-2](#) [NX3225GA-16.000M-STD-CRG-2](#) [NX3225GA-12.000M-STD-CRA-1](#) [NX3225GA-12.288M-STD-CRG-2](#) [NX3225GA-12MHZ-STD-CRG-2](#) [NX3225GA-27.12M-STD-CRG-2](#) [NX3225GA-20.000M-STD-CRG-2](#) [NX3225GA-26.000M-STD-CRG-2](#) [NX3225GA-16.9344M-STD-CRG-2](#) [NX3225GA-27M-STD-CRG-2](#) [NX3225GA-13.56M-STD-CRG-2](#) [NX3225GA-14.7456M-STD-CRG-2](#) [NX3225GA-10.000M-STD-CRG-2](#) [NX3225GA-19.2M-STD-CRG-2](#)