
# 2199248-6 - ACTIVE

TE Internal #: 2199248-6 PCB Spring Contact, C-Clip, Scalable, Side Protected, Uncompressed Height 1.6 mm [.063 in], Length 3.9 mm [.154 in], Width 2 mm [.079 in]

### View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > PCB Spring Contacts

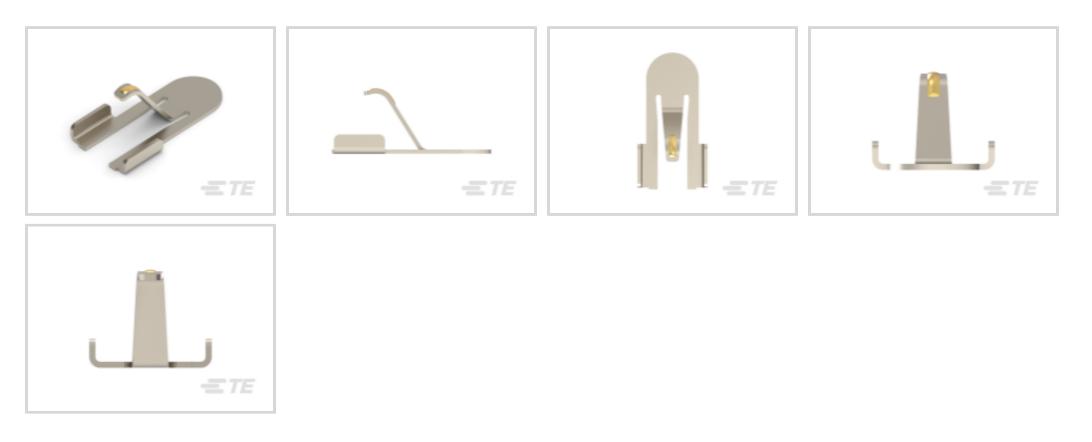

Spring Finger Type: C-Clip

Scalable: Yes

Side Protected: Yes

Uncompressed Height: 1.6 mm [.063 in ]

Product Length: 3.9 mm [.154 in ]

# Features

# Product Type Features

Spring Finger Type	C-Clip
Scalable	Yes
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Side Protected	Yes
Number of Positions	1
Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Stainless Steel
Contact Working Range (Low)	.8 mm[.031 in]
Contact Working Range (High)	1.4 mm[.055 in]
Point of Contact Area Plating Material	Gold

# 2199248-6

PCB Spring Contact, C-Clip, Scalable, Side Protected, Uncompressed Height 1.6 mm [.063 in], Length 3.9 mm [.154 in], Width 2 mm [.079 in]



Contact Current Rating (Max)	2 A
Dimensions	
Uncompressed Height	1.6 mm[.063 in]
Product Length	3.9 mm[.154 in]
Product Width	2 mm[.079 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	8000
Packaging Method	Tape & Reel
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# 2199248-6


PCB Spring Contact, C-Clip, Scalable, Side Protected, Uncompressed Height 1.6 mm [.063 in], Length 3.9 mm [.154 in], Width 2 mm [.079 in]



# **Compatible Parts**



# Customers Also Bought

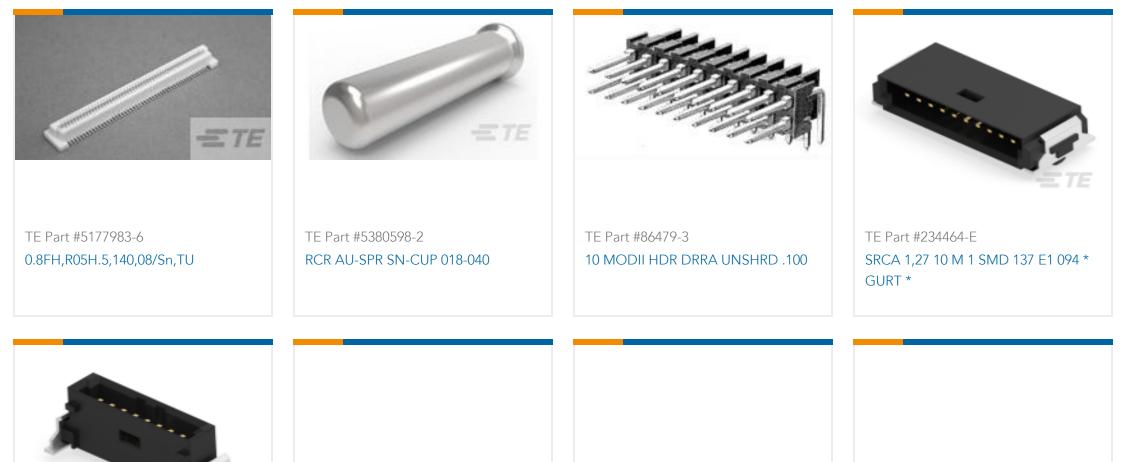

TE			
TE Part #284699-E SRCP 1,27 8 M 1 SMD 137 E1 094 * GU- H *	TE Part #214017-E SRCP 1,27 4 M 1 SMD 137 E1 094 * GU- H KL	TE Part #839405-E IDCCS SRC 1,27 8 * SPX APD 50 HF	TE Part #839603-E IDCCS SRC 1,27 10 * SPX APD 50 HF

TE Part #839868-E IDCCS SRC 1,27 10 * SPX APD 250 HF	TE Part #839869-E IDCCS SRC 1,27 10 * APU APD 80 HF

# Documents

Product Drawings

Shield Finger, Loose Piece, Type A, 1.6h

English

CAD Files 3D PDF

# 2199248-6

PCB Spring Contact, C-Clip, Scalable, Side Protected, Uncompressed Height 1.6 mm [.063 in], Length 3.9 mm [.154 in], Width 2 mm [.079 in]



3D

Customer View Model ENG\_CVM\_CVM\_2199248-6\_A3.2d\_dxf.zip English Customer View Model ENG\_CVM\_CVM\_2199248-6\_A3.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_2199248-6\_A3.3d\_stp.zip English

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance Product Compliance

English

**Product Compliance** 

English