




**Part Number :** [543630389](#)

**Product Description :** 0.50mm Pitch SlimStack Receptacle, Surface Mount, Dual Row, Vertical, 2.00mm Stacking Height, with Solder Tabs, 30 Circuits

**Series Number :** 54363

**Status :** Active

**Product Category :** Board-to-Board Connectors

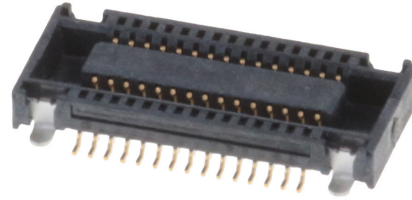

---

## Documents & Resources

### Drawings

[Drawing 543630389\\_sd.pdf](#)

### 3D Models and Design Files

[3D Model 543630389\\_stp.zip](#)

### Specifications

[Packaging Specification 543639200-SPK-200.pdf](#)

[Product Specification PS-54363-046-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### [Multiple Part Product Compliance Statements](#)

- Eu RoHS
- REACH SVHC
- Low-Halogen

### [Multiple Part Industry Compliance Documents](#)

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Board-to-Board Connectors
Series	54363
Description	0.50mm Pitch SlimStack Receptacle, Surface Mount, Dual Row, Vertical, 2.00mm Stacking Height, with Solder Tabs, 30 Circuits
Series Name	0.5, BB H2
Application	Board-to-Board, Signal
Component Type	PCB Receptacle
Product Family	SlimStack Board-to-Board/Board-to-FPC Connectors
Product Name	SlimStack
UPC	822348323890

### Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V AC (RMS)/DC

### Physical

Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Capable	No
Mated Height	2.00mm
Mated Width	6.00mm
Material - Metal	Phosphor Bronze

Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	124.781/mg
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Plating min - Mating	0.254µm
Plating min - Termination	0.051µm
Polarized to Mating Part	No
Polarized to PCB	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
0.50mm Pitch Vertical SlimStack Plugs	<u>55650</u>

---

This document was generated on Feb 07, 2024