

HV Series, Radial, Conformally Coated, 500 – 10,000 VDC (Industrial Grade)

Overview

KEMET's High Voltage HV Series radial conformally coated ceramic capacitors are designed with C0G and X7R dielectrics which feature a 125°C maximum operating temperature. These devices are ideal for high voltage power supplies, DC/DC conversion and well suited for timing, resonant, bypass, and decoupling applications.

These high voltage capacitors are widely used in industries related to semiconductors, telecommunications, test/diagnostic equipment and power/grid.

Benefits

- Operating temperature range of -55°C to +125°C
- High shock and vibration capability
- Capacitance range from 150 pF – 5.6 µF in X7R
- Capacitance range from 10p F – 0.39 µF in C0G
- DC voltage ratings of 500 V, 1 kV, 2 kV, 3 kV, 4 kV, 5 kV, 7.5 kV, 10 kV
- High thermal stability
- Encapsulation meets flammability standard UL 94 V-0



Applications

- Switch mode power supplies
- DC/DC Converters
- Lighting ballast
- Measuring equipment
- Inverters
- Telecom equipment
- High voltage coupling


Ordering Information

10	HV	23	N	102	K		N	M		
Voltage	Series	Style/Size		Dielectric	Capacitance Code (pF)	Capacitance Tolerance ¹		Lead Wire Barrier Layer ²	Test Level	Packaging
05 = 500 V 10 = 1,000 V 20 = 2,000 V 30 = 3,000 V 40 = 4,000 V 50 = 5,000 V 75 = 7,500 V 100 = 10,000 V	HV	20	30	B, W = X7R type N = COG (NP0)	Two significant digits and number of zeros	COG J = ±5% K = ±10% M = ±20%	X7R K = ±10% M = ±20% P = 0/+100% Z = -20%/+80%	N = Nickel C = Copper	M = MIL-PRF-49467 Group A Screening	Blank = Waffle Tray

¹ Additional capacitance tolerance offerings may be available. Contact KEMET for details.

² Please refer to the Construction section in the datasheet.

Dimensions – Inches (Millimeters)

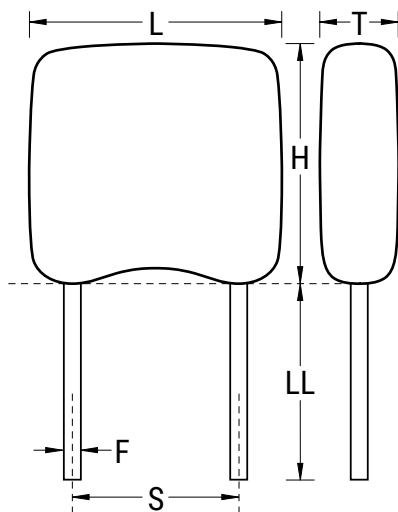

Series	Style/Size	Length (L)	Height (H)	Thickness (T)	Lead Spacing ±0.030 (S)	Lead Diameter (F)	Lead Length Minimum (LL)
HV	20	0.250 (6.35)	0.220 (5.59)	0.200 (5.08)	0.170 (4.32)	0.025 +0.004/-0.002 (0.635 +0.102/-0.051)	0.125 (3.175)
	21	0.320 (8.13)	0.280 (7.11)	0.250 (6.35)	0.220 (5.59)		
	22	0.370 (9.40)	0.300 (7.62)	0.250 (6.35)	0.275 (6.99)		
	23	0.470 (11.94)	0.400 (10.16)	0.270 (6.89)	0.375 (9.53)		
	24	0.570 (14.48)	0.500 (12.70)	0.270 (6.89)	0.475 (12.07)		
	25	0.670 (17.02)	0.600 (15.24)	0.270 (6.89)	0.575 (14.61)		
	26	0.770 (19.56)	0.720 (18.29)	0.270 (6.89)	0.675 (17.15)		
	30	0.450 (11.43)	0.220 (5.59)	0.200 (5.08)	0.300 (7.62)		
	31	0.550 (13.97)	0.280 (7.11)	0.250 (6.35)	0.400 (10.16)		
	33	0.850 (21.59)	0.400 (10.16)	0.270 (6.89)	0.700 (17.78)		
	34	1.050 (26.67)	0.500 (12.70)	0.270 (6.89)	0.975 (24.76)		
	35	1.250 (31.75)	0.600 (15.24)	0.270 (6.89)	1.175 (29.84)		
36	1.450 (36.83)	0.720 (18.29)	0.270 (6.89)	1.375 (34.92)			

Environmental Compliance

RoHS exemptions 7a & 7c-II apply to HV series parts that have nickel barrier layer leads.
 All other parts are Not RoHS Compliant.

Electrical Parameters/Characteristics

Item	Parameters/Characteristics
Operating Temperature Range:	-55°C to +125°C
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC):	X7R: ±15% COG: ±30 PPM/°C
Aging Rate (Maximum % Cap Loss/Decade Hour):	X7R: 2.0%/decade hour COG: 0%
¹ Dielectric Withstanding Voltage:	150% of rated voltage for voltage rating of 500 V ≤ V < 1,000 V 120% of rated voltage for voltage rating of ≥ 1,000 V (5±1 seconds and charge/discharge not exceeding 50 mA at 25°C)
² Dissipation Factor (DF) Maximum Limit at 25°C:	X7R: 2.0% COG: 0.15%
³ Insulation Resistance (IR) Limit at 25°C:	1,000 MΩ microfarads or 100 GΩ (Rated voltage applied for 120±5 seconds)

¹ DWV is the voltage a capacitor can withstand (survive) for a short period of time.
 It exceeds the nominal and continuous working voltage of the capacitor.

² See part number specification sheet for frequency and voltage for Capacitance, Dissipation Factor and TCC measurement conditions.

³ To obtain IR limit, divide MΩ-μF value by the capacitance and compare to GΩ limit. Select the lower of the two limits.

Note: When measuring capacitance, it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

Post Environmental Limits

Dielectric	Rated DC Voltage	Capacitance Value	DF (%)	Capacitance Shift	IR
COG	All	All	0.25	0.3% or ±0.50 pF	10% of Initial Limit
X7R	All	All	3.0	±20%	10% of Initial Limit

Table 1A – HV Series X7R Waterfall

Style		HV20			HV21				HV22				HV23				
Voltage		500	1k	2k	500	1k	2k	3k	500	1k	2k	3k	500	1k	2k	3k	4k
Capacitance	Capacitance Code																
680 pf	681								X	X	X	X					
820 pf	821	X	X	X	X	X	X	X	X	X	X	X					
1,000 pf	102	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,200 pf	122	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,500 pf	152	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,800 pf	182	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2,200 pf	222	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2,700 pf	272	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3,300 pf	332	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3,900 pf	392	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
4,700 pf	472	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
5,600 pf	562	X	X		X	X	X		X	X	X	X	X	X	X	X	X
6,800 pf	682	X	X		X	X	X		X	X	X		X	X	X	X	X
8,200 pf	822	X	X		X	X	X		X	X	X		X	X	X	X	X
0.01 µF	103	X	X		X	X	X		X	X	X		X	X	X	X	
0.012 µF	123	X	X		X	X	X		X	X	X		X	X	X	X	
0.015 µF	153	X	X		X	X			X	X	X		X	X	X	X	
0.018 µF	183	X	X		X	X			X	X			X	X	X	X	
0.022 µF	223	X	X		X	X			X	X			X	X	X		
0.027 µF	273	X			X	X			X	X			X	X	X		
0.033 µF	333	X			X	X			X	X			X	X	X		
0.039 µF	393	X			X	X			X	X			X	X			
0.047 µF	473	X			X	X			X	X			X	X			
0.056 µF	563	X			X	X			X	X			X	X			
0.068 µF	683	X			X	X			X	X			X	X			
0.082 µF	823	X			X				X	X			X	X			
0.1 µF	104				X				X	X			X	X			
0.12 µF	124				X				X				X	X			
0.15 µF	154				X				X				X	X			
0.18 µF	184				X				X				X	X			
0.22 µF	224								X				X	X			
0.27 µF	274								X				X	X			
0.33 µF	334												X				
0.39 µF	394												X				
0.47 µF	474												X				
0.56 µF	564												X				
Voltage		500	1k	2k	500	1k	2k	3k	500	1k	2k	3k	500	1k	2k	3k	4k
Style		HV20			HV21				HV22				HV23				

Table 1A – HV Series X7R Waterfall cont.

Style		HV24						HV25						HV26					
Voltage		500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k
Capacitance	Capacitance Code																		
1,000 pf	102	X	X	X	X	X	X												
1,200 pf	122	X	X	X	X	X	X												
1,500 pf	152	X	X	X	X	X	X												
1,800 pf	182	X	X	X	X	X	X												
2,200 pf	222	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2,700 pf	272	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3,300 pf	332	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3,900 pf	392	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
4,700 pf	472	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
5,600 pf	562	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
6,800 pf	682	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
8,200 pf	822	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.01 µF	103	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.012 µF	123	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.015 µF	153	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.018 µF	183	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.022 µF	223	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.027 µF	273	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.033 µF	333	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.039 µF	393	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.047 µF	473	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.056 µF	563	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.068 µF	683	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.082 µF	823	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.1 µF	104	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.12 µF	124	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.15 µF	154	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.18 µF	184	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.22 µF	224	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.27 µF	274	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.33 µF	334	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.39 µF	394	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.47 µF	474	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.56 µF	564	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.68 µF	684	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.82 µF	824	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1 µF	105	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1.2 µF	125	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1.5 µF	155	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1.8 µF	185	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2.2 µF	225	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2.7 µF	275	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3.3 µF	335	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3.9 µF	395	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Voltage		500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k
Style		HV24						HV25						HV26					

Table 1A – HV Series X7R Waterfall cont.

Style		HV30					HV31						HV33						
Voltage		500	1k	2k	3k	4k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	7.5k
Capacitance	Capacitance Code																		
150 pf	151	X	X	X	X	X													
180 pf	181	X	X	X	X	X													
220 pf	221	X	X	X	X	X													
270 pf	271	X	X	X	X	X													
330 pf	331	X	X	X	X	X													
390 pf	391	X	X	X	X	X													
470 pf	471	X	X	X	X	X													
560 pf	561	X	X	X	X	X													
680 pf	681	X	X	X	X	X	X	X	X	X	X	X							
820 pf	821	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,000 pf	102	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,200 pf	122	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,500 pf	152	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
1,800 pf	182	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
2,200 pf	222	X	X	X	X		X	X	X	X	X		X	X	X	X	X	X	X
2,700 pf	272	X	X	X	X		X	X	X	X	X		X	X	X	X	X	X	X
3,300 pf	332	X	X	X	X		X	X	X	X	X		X	X	X	X	X	X	X
3,900 pf	392	X	X	X			X	X	X	X	X		X	X	X	X	X	X	X
4,700 pf	472	X	X	X			X	X	X	X	X		X	X	X	X	X	X	X
5,600 pf	562	X	X	X			X	X	X	X			X	X	X	X	X	X	
6,800 pf	682	X	X	X			X	X	X	X			X	X	X	X	X	X	X
8,200 pf	822	X	X	X			X	X	X	X			X	X	X	X	X	X	
0.01 µF	103	X	X				X	X	X	X			X	X	X	X	X		
0.012 µF	123	X	X				X	X	X				X	X	X	X	X		
0.015 µF	153	X	X				X	X	X				X	X	X	X			
0.018 µF	183	X	X				X	X	X				X	X	X	X			
0.022 µF	223	X	X				X	X	X				X	X	X	X			
0.027 µF	273	X	X				X	X	X				X	X	X	X			
0.033 µF	333	X	X				X	X	X				X	X	X	X			
0.039 µF	393	X	X				X	X					X	X	X	X			
0.047 µF	473	X	X				X	X					X	X	X				
0.056 µF	563	X	X				X	X					X	X	X				
0.068 µF	683	X					X	X					X	X	X				
0.082 µF	823	X					X	X					X	X	X				
0.1 µF	104	X					X	X					X	X					
0.12 µF	124	X					X	X					X	X					
0.15 µF	154	X					X	X					X	X					
0.18 µF	184	X					X						X	X					
0.22 µF	224						X						X	X					
0.27 µF	274						X						X	X					
0.33 µF	334						X						X	X					
0.39 µF	394						X						X	X					
0.47 µF	474												X	X					
0.56 µF	564												X	X					
0.68 µF	684												X	X					
0.82 µF	824												X						
1 µF	105												X						
1.2 µF	125												X						
1.5 µF	155												X						
Voltage		500	1k	2k	3k	4k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	7.5k
Style		HV30					HV31						HV33						

Table 1A – HV Series X7R Waterfall cont.

Style		HV34								HV35								HV36								
Voltage		500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k	
Capacitance	Capacitance Code																									
1,000 pf	102	X	X	X	X	X	X	X	X								X									
1,200 pf	122	X	X	X	X	X	X	X	X								X									
1,500 pf	152	X	X	X	X	X	X	X	X								X									X
1,800 pf	182	X	X	X	X	X	X	X	X								X									X
2,200 pf	222	X	X	X	X	X	X	X	X								X									X
2,700 pf	272	X	X	X	X	X	X	X	X								X									X
3,300 pf	332	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X									X
3,900 pf	392	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X									X
4,700 pf	472	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
5,600 pf	562	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
6,800 pf	682	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
8,200 pf	822	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
0.01 µF	103	X	X	X	X	X	X			X	X	X	X	X	X	X	X									X
0.012 µF	123	X	X	X	X	X	X			X	X	X	X	X	X	X	X									X
0.015 µF	153	X	X	X	X	X	X			X	X	X	X	X	X	X	X									X
0.018 µF	183	X	X	X	X	X	X			X	X	X	X	X	X	X	X									X
0.022 µF	223	X	X	X	X	X	X			X	X	X	X	X	X	X	X									X
0.027 µF	273	X	X	X	X	X	X			X	X	X	X	X	X	X	X									X
0.033 µF	333	X	X	X	X	X				X	X	X	X	X			X	X	X	X	X	X	X			X
0.039 µF	393	X	X	X	X					X	X	X	X	X			X	X	X	X	X	X				X
0.047 µF	473	X	X	X	X					X	X	X	X	X			X	X	X	X	X	X				X
0.056 µF	563	X	X	X	X					X	X	X	X	X			X	X	X	X	X	X				X
0.068 µF	683	X	X	X	X					X	X	X	X				X	X	X	X	X	X				X
0.082 µF	823	X	X	X	X					X	X	X	X				X	X	X	X	X	X				X
0.1 µF	104	X	X	X						X	X	X	X				X	X	X	X	X					X
0.12 µF	124	X	X	X						X	X	X	X				X	X	X	X	X					X
0.15 µF	154	X	X	X						X	X	X					X	X	X	X	X					X
0.18 µF	184	X	X	X						X	X	X					X	X	X	X	X					X
0.22 µF	224	X	X	X						X	X	X					X	X	X	X	X					X
0.27 µF	274	X	X	X						X	X	X					X	X	X	X	X					X
0.33 µF	334	X	X							X	X						X	X	X							X
0.39 µF	394	X	X							X	X						X	X								X
0.47 µF	474	X	X							X	X						X	X								X
0.56 µF	564	X	X							X	X						X	X								X
0.68 µF	684	X	X							X	X						X	X								X
0.82 µF	824	X	X							X	X						X	X								X
1 µF	105	X	X							X	X						X	X								X
1.2 µF	125	X								X	X						X	X								X
1.5 µF	155	X								X							X	X								X
1.8 µF	185	X								X							X	X								X
2.2 µF	225	X								X							X	X								X
2.7 µF	275									X							X									X
3.3 µF	335									X							X									X
3.9 µF	395									X							X									X
4.7 µF	475									X							X									X
5.6 µF	565									X							X									X
Voltage		500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k	
Style		HV34								HV35								HV36								

Table 1B – HV Series C0G Waterfall

Style		HV20				HV21				HV22				HV23				
Voltage		500	1k	2k	3k	500	1k	2k	3k	500	1k	2k	3k	500	1k	2k	3k	4k
Capacitance	Capacitance Code																	
12 pf	120		X															
15 pf	150		X	X	X													
18 pf	180		X	X	X													
22 pf	220		X	X	X			X	X									
27 pf	270	X	X	X	X			X	X									
33 pf	330	X	X	X	X			X	X	X	X	X	X					
39 pf	390	X	X	X	X	X	X	X	X	X	X	X	X					
47 pf	470	X	X	X	X	X	X	X	X	X	X	X	X					
56 pf	560	X	X	X	X	X	X	X	X	X	X	X	X					
68 pf	680	X	X	X	X	X	X	X	X	X	X	X	X					
82 pf	820	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
100 pf	101	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
120 pf	121	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
150 pf	151	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
180 pf	181	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
220 pf	221	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
270 pf	271	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
330 pf	331	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
390 pf	391	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
470 pf	471	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
560 pf	561	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
680 pf	681	X	X	X		X	X	X		X	X	X	X	X	X	X	X	X
820 pf	821	X	X			X	X	X		X	X	X	X	X	X	X	X	
1,000 pf	102	X	X			X	X	X		X	X	X	X	X	X	X	X	
1,200 pf	122	X	X			X	X	X		X	X	X	X	X	X	X	X	
1,500 pf	152	X				X	X	X		X	X	X		X	X	X	X	
1,800 pf	182	X				X	X	X		X	X	X		X	X	X	X	
2,200 pf	222	X				X	X			X	X	X		X	X	X	X	
2,700 pf	272	X				X	X			X	X	X		X	X	X		
3,300 pf	332	X				X	X			X	X	X		X	X	X		
3,900 pf	392	X				X	X			X	X			X	X	X		
4,700 pf	472	X				X	X			X	X			X	X	X		
5,600 pf	562									X	X			X	X	X		
6,800 pf	682									X	X			X	X			
8,200 pf	822									X				X	X			
0.01 µF	103									X				X	X			
0.012 µF	123									X				X	X			
0.015 µF	153									X				X	X			
0.018 µF	183									X				X				
0.022 µF	223													X				
0.027 µF	273													X				
0.033 µF	333													X				
Voltage		500	1k	2k	3k	500	1k	2k	3k	500	1k	2k	3k	500	1k	2k	3k	4k
Style		HV20				HV21				HV22				HV23				

Table 1B – HV Series C0G Waterfall cont.

Style		HV24						HV25						HV26				
Voltage		500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	5k
Capacitance	Capacitance Code																	
27 pf	270					X	X											
33 pf	330					X	X											
39 pf	390					X	X											
47 pf	470					X	X											
56 pf	560	X	X	X	X	X	X											
68 pf	680	X	X	X	X	X	X											
82 pf	820	X	X	X	X	X	X											
100 pf	101	X	X	X	X	X	X											X
120 pf	121	X	X	X	X	X	X											X
150 pf	151	X	X	X	X	X	X											X
180 pf	181	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X
220 pf	221	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X
270 pf	271	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
330 pf	331	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
390 pf	391	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
470 pf	471	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
560 pf	561	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
680 pf	681	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
820 pf	821	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,000 pf	102	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,200 pf	122	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,500 pf	152	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,800 pf	182	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X
2,200 pf	222	X	X	X	X			X	X	X	X			X	X	X	X	X
2,700 pf	272	X	X	X	X			X	X	X	X			X	X	X	X	X
3,300 pf	332	X	X	X	X			X	X	X	X			X	X	X	X	X
3,900 pf	392	X	X	X	X			X	X	X	X			X	X	X	X	X
4,700 pf	472	X	X	X	X			X	X	X	X			X	X	X	X	X
5,600 pf	562	X	X	X				X	X	X	X			X	X	X	X	X
6,800 pf	682	X	X	X				X	X	X				X	X	X	X	X
8,200 pf	822	X	X	X				X	X	X				X	X	X	X	
0.01 µF	103	X	X	X				X	X	X				X	X	X		
0.012 µF	123	X	X					X	X	X				X	X	X		
0.015 µF	153	X	X					X	X					X	X	X		
0.018 µF	183	X	X					X	X					X	X	X		
0.022 µF	223	X	X					X	X					X	X	X		
0.027 µF	273	X	X					X	X					X	X			
0.033 µF	333	X	X					X	X					X	X			
0.039 µF	393	X	X					X	X					X	X			
0.047 µF	473	X	X					X	X					X	X			
0.056 µF	563	X												X	X			
0.068 µF	683	X												X	X			
Voltage		500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	5k
Style		HV24						HV25						HV26				

Table 1B – HV Series C0G Waterfall cont.

Style		HV30					HV31						HV33						
Voltage		500	1k	2k	3k	4k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	7.5k
Capacitance	Capacitance Code																		
10 pf	100					X													
12 pf	120					X													
15 pf	150	X	X	X	X	X													
18 pf	180	X	X	X	X	X													
22 pf	220	X	X	X	X	X													
27 pf	270	X	X	X	X	X	X	X	X	X								X	X
33 pf	330	X	X	X	X	X	X	X	X	X								X	X
39 pf	390	X	X	X	X	X	X	X	X	X								X	X
47 pf	470	X	X	X	X	X	X	X	X	X	X	X						X	X
56 pf	560	X	X	X	X	X	X	X	X	X	X	X						X	X
68 pf	680	X	X	X	X	X	X	X	X	X	X	X						X	X
82 pf	820	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
100 pf	101	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
120 pf	121	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
150 pf	151	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
180 pf	181	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
220 pf	221	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X
270 pf	271	X	X	X	X		X	X	X	X			X	X	X	X	X	X	X
330 pf	331	X	X	X	X		X	X	X	X			X	X	X	X	X	X	X
390 pf	391	X	X	X	X		X	X	X	X			X	X	X	X	X	X	X
470 pf	471	X	X	X	X		X	X	X	X			X	X	X	X	X	X	X
560 pf	561	X	X	X	X		X	X	X	X			X	X	X	X	X	X	X
680 pf	681	X	X	X	X		X	X	X	X			X	X	X	X	X	X	X
820 pf	821	X	X	X			X	X	X	X			X	X	X	X	X	X	
1,000 pf	102	X	X	X			X	X	X	X			X	X	X	X	X	X	
1,200 pf	122	X	X	X			X	X	X	X			X	X	X	X	X	X	
1,500 pf	152	X	X	X			X	X	X	X			X	X	X	X	X	X	
1,800 pf	182	X	X	X			X	X	X	X			X	X	X	X			
2,200 pf	222	X	X				X	X	X	X			X	X	X	X			
2,700 pf	272	X	X				X	X	X	X			X	X	X	X			
3,300 pf	332	X	X				X	X	X				X	X	X	X			
3,900 pf	392	X	X				X	X	X				X	X	X	X			
4,700 pf	472	X	X				X	X	X				X	X	X	X			
5,600 pf	562	X	X				X	X	X				X	X	X	X			
6,800 pf	682						X	X					X	X	X	X			
8,200 pf	822						X	X					X	X	X				
0.01 µF	103						X	X					X	X	X				
0.012 µF	123						X	X					X	X	X				
0.015 µF	153						X						X	X	X				
0.018 µF	183						X						X	X	X				
0.022 µF	223						X						X	X					
0.027 µF	273						X						X	X					
0.033 µF	333						X						X	X					
0.039 µF	393												X	X					
0.047 µF	473												X	X					
0.056 µF	563												X						
0.068 µF	683												X						
0.082 µF	823												X						
0.1 µF	104												X						
Voltage		500	1k	2k	3k	4k	500	1k	2k	3k	4k	5k	500	1k	2k	3k	4k	5k	7.5k
Style		HV30					HV31						HV33						

Table 1B – HV Series C0G Waterfall cont.

Style		HV34								HV35								HV36							
Voltage		500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k
Capacitance	Capacitance Code																								
39 pf	390							X	X																
47 pf	470					X	X	X	X								X								
56 pf	560			X	X	X	X	X	X																
68 pf	680	X	X	X	X	X	X	X	X																
82 pf	820	X	X	X	X	X	X	X	X																
100 pf	101	X	X	X	X	X	X	X	X																
120 pf	121	X	X	X	X	X	X	X	X														X	X	X
150 pf	151	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
180 pf	181	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
220 pf	221	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
270 pf	271	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
330 pf	331	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
390 pf	391	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
470 pf	471	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
560 pf	561	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
680 pf	681	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
820 pf	821	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X
1,000 pf	102	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,200 pf	122	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,500 pf	152	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1,800 pf	182	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2,200 pf	222	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2,700 pf	272	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3,300 pf	332	X	X	X	X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
3,900 pf	392	X	X	X	X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
4,700 pf	472	X	X	X	X					X	X	X	X												
5,600 pf	562	X	X	X	X					X	X	X	X												
6,800 pf	682	X	X	X	X					X	X	X	X												
8,200 pf	822	X	X	X	X					X	X	X	X												
0.01 µF	103	X	X	X	X					X	X	X	X												
0.012 µF	123	X	X	X	X					X	X	X	X												
0.015 µF	153	X	X	X	X					X	X	X	X												
0.018 µF	183	X	X	X						X	X	X	X												
0.022 µF	223	X	X	X						X	X	X	X												
0.027 µF	273	X	X							X	X	X													
0.033 µF	333	X	X							X	X	X													
0.039 µF	393	X	X							X	X	X													
0.047 µF	473	X	X							X	X	X													
0.056 µF	563	X	X							X	X	X													
0.068 µF	683	X								X	X	X													
0.082 µF	823	X								X	X	X													
0.1 µF	104	X								X	X	X													
0.12 µF	124	X								X	X	X													
0.15 µF	154	X								X	X	X													
0.18 µF	184									X															
0.22 µF	224									X															
0.27 µF	274									X															
0.33 µF	334																								
0.39 µF	394																								
Voltage		500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k	500	1k	2k	3k	4k	5k	7.5k	100k
Style		HV34								HV35								HV36							

Packaging Quantities

Style	Waffle Pack Quantity	Style	Waffle Pack Quantity
HV20	56	HV30	28
HV21	28	HV31	20
HV22	28	HV33	20
HV23	28	HV34	4
HV24	20	HV35	4
HV25	20	HV36	4
HV26	20	-	-


Soldering Process

Recommended Soldering Technique:

- Solder Wave
- Hand Soldering (Manual)

Recommended Soldering Profile:


- Optimum Wave Solder Profile

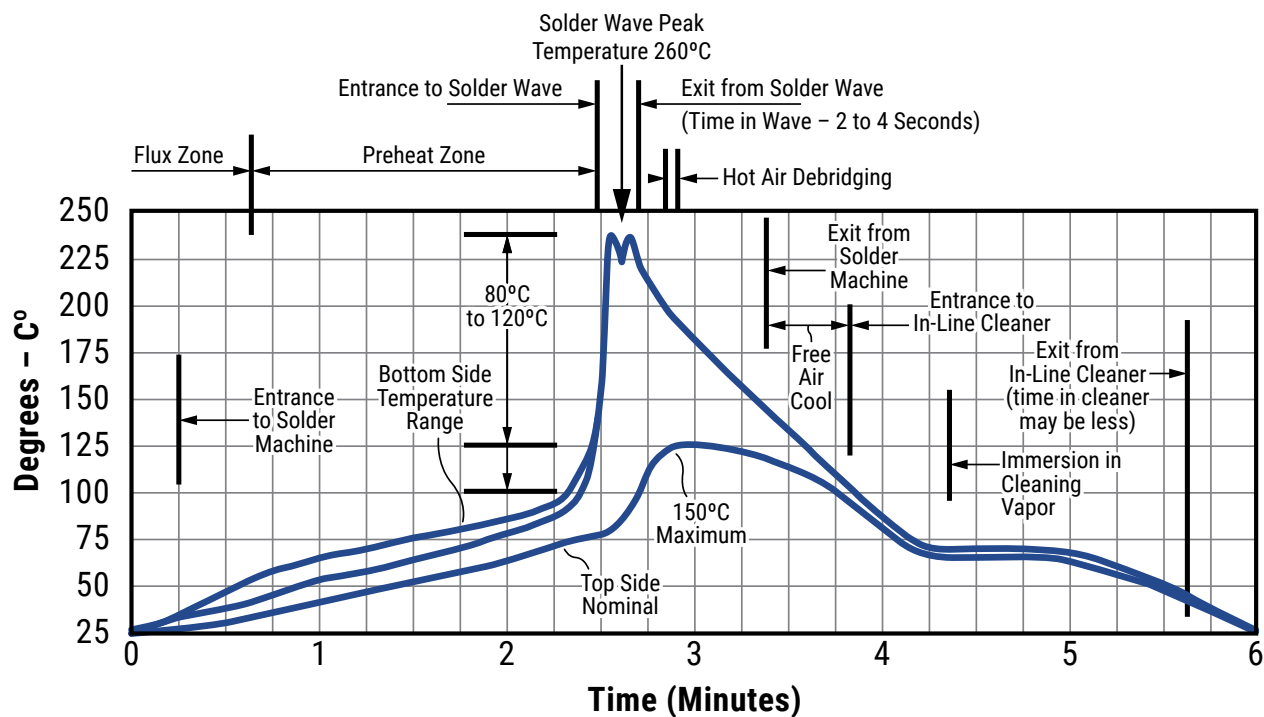

Soldering Process cont.

- Hand Soldering (Manual)

Manual Solder Profile with Pre-heating

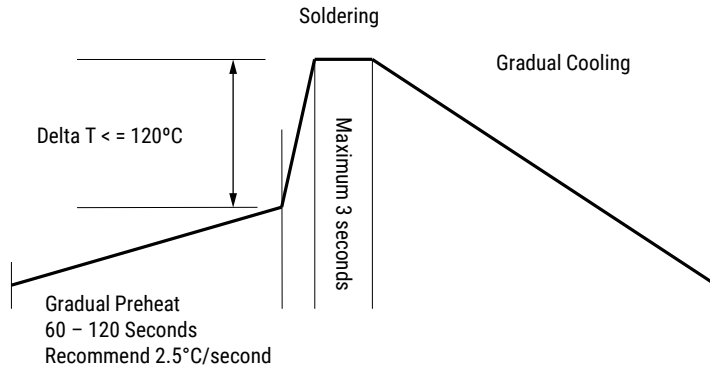

KEMET recommends following the guidelines and techniques outlined in technical bulletins F2103 and F9207.

Table 2 – Performance & Reliability: Test Methods and Conditions


Stress	Reference	Test or Inspection Method
Solderability	J-STD-002	Method A at 235°C, category 3
Temperature Cycling	JESD22 Method JA-104	50 cycles (-55°C to 220°C), measurement at 24 ±4 hours after test conclusion. 30 minutes maximum dwell time at each temperature extreme. 8 minutes maximum transition time.
Biased Humidity	MIL-STD-202 Method 103	Load humidity: 1,000 hours 85°C/85% RH and rated voltage. Add 100 kΩ resistor. Measurement at 24 hours ±4 hours after test conclusion.
		Low volt humidity: 1,000 hours 85°C/85% RH and 1.5 V. Add 100 kΩ resistor. Measurement at 24 hours ±4 hours after test conclusion.
Immersion	MIL-STD-202 Method 104	Test condition B
Storage Life	MIL-STD-202 Method 108	Unpowered 1,000 hours at 200°C. Measurement at 24 hours ±4 hours after test conclusion. IR Measurement at 150°C
High Temperature Life	MIL-STD-202 Method 108	1,000 hours at 200°C with rated voltage applied.
High Temperature Lead Pull	KEMET Internal	Peel to Failure: 4 lbs (1.84 kg) minimum
Vibration	MIL-STD-202 Method 204	5g for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8" X 5" PCB. 031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10 – 2000 Hz.
Resistance to Soldering Heat	MIL-STD-202 Method 210	Test Condition B, Solder dip. Note: no preheat of samples.
Terminal Strength	MIL-STD-202 Method 211	Test Condition A. 454 g for 5 – 10 seconds; Bend test at 227 g, 3 bends
Mechanical Shock	MIL-STD-202 Method 213	Test Condition C. Figure 1 of Method 213.
Resistance to Solvents	MIL-STD-202 Method 215	Add aqueous wash chemical – OKEM Clean or equivalent.

Storage & Handling

The un-mounted storage life of a leaded ceramic capacitor is dependent upon storage and atmospheric conditions as well as packaging materials. While the ceramic chips enveloped under the epoxy coating themselves are quite robust in most environments, solderability of the wire lead on the final epoxy-coated product will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature and exposure to direct sunlight—reels may soften or warp, and tape peel force may increase.


KEMET recommends storing the un-mounted capacitors in their original packaging, in a location away from direct sunlight, and where the temperature and relative humidity do not exceed 40 degrees centigrade and 70% respectively. For optimum solderability, capacitor stock should be used promptly, preferably within 18 months of receipt. For applications requiring pre-tinning of components, storage life may be extended if solderability is verified. Before cleaning, bonding or molding these devices, it is important to verify that your process does not affect product quality and performance. KEMET recommends testing and evaluating the performance of a cleaned, bonded or molded product prior to implementing and/or qualifying any of these processes.

Construction

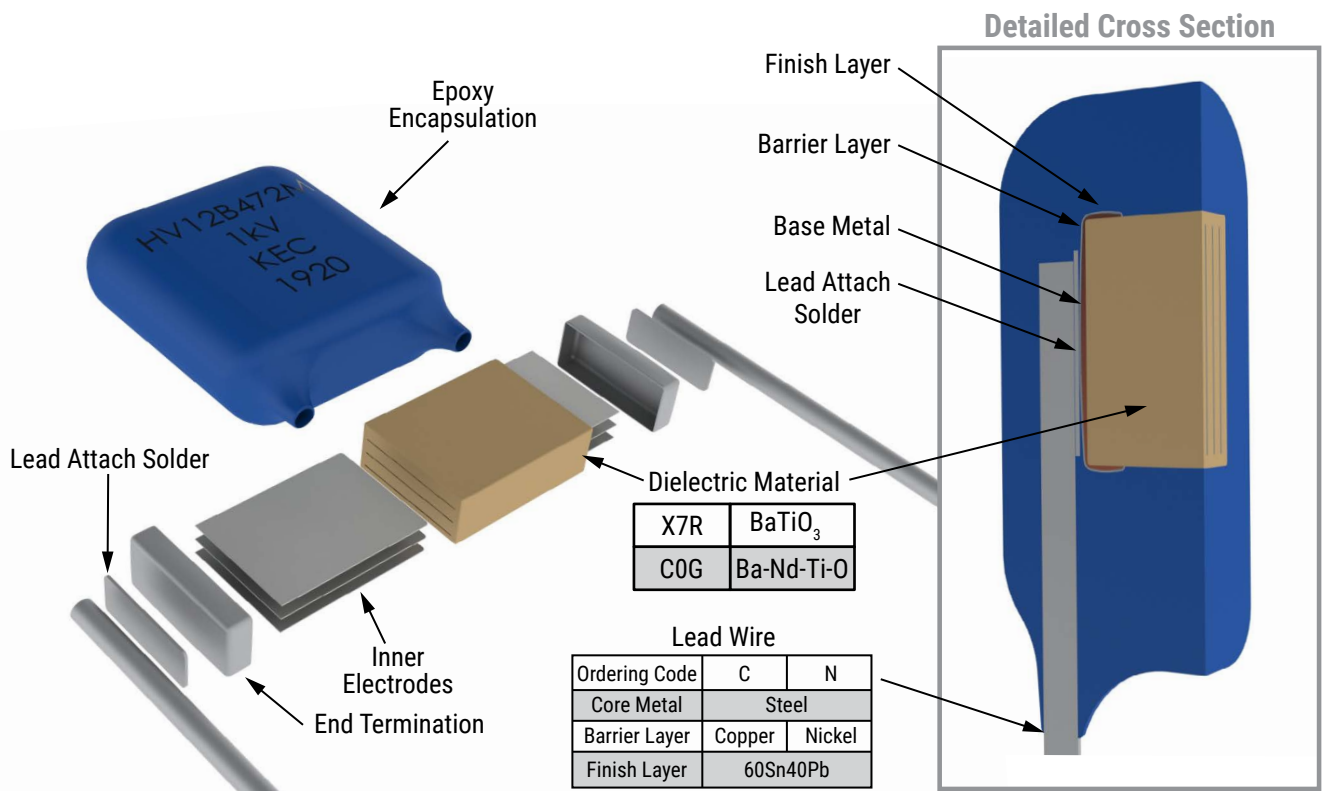


Marking

HV20, HV21

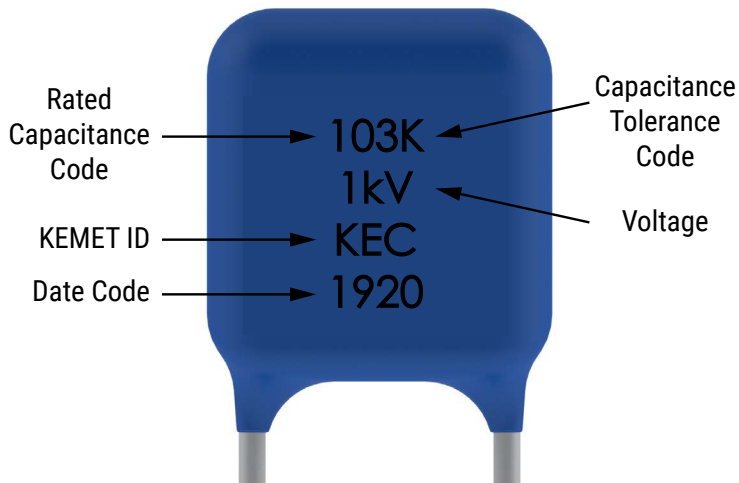

All Other Sizes

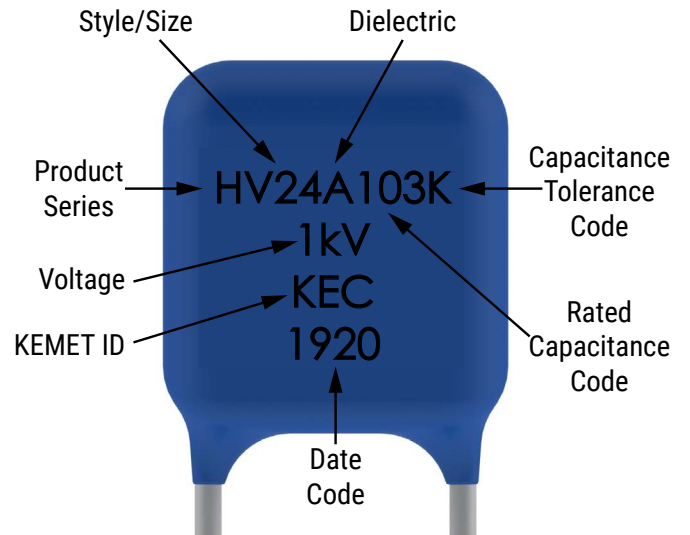

Date Code	
19	20
Manufacturing Year: 19 = 2019	Manufacturing Week: 20 = Week 20 (of manufacturing calendar year)

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

KEMET is a registered trademark of KEMET Electronics Corporation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KEMET:

[30HV22N471JN](#) [20HV25B563K](#) [10HV20B103K](#) [50HV24B102KC](#) [50HV24B472M](#) [30HV22B102K](#) [10HV21B332K](#)
[05HV20B103KN](#) [30HV21B332K](#) [05HV23B474KN](#) [05HV20B223KN](#) [05HV24B105KN](#) [10HV20B472K](#) [10HV23B274K](#)
[20HV22B103ZN](#) [05HV35B335KC](#) [10HV24B104KCM](#) [20HV24B104KCM](#) [20HV23B103KCM](#) [10HV24B154KN](#)
[05HV25B224MC](#) [30HV23B153MN](#) [30HV30N101JC](#) [30HV30N221JC](#) [30HV35N472JC](#) [30HV30N220JC](#)
[30HV35N222JC](#) [30HV30N331JC](#) [30HV30N150JC](#) [10HV36N823JC](#) [20HV36N223JC](#) [30HV30N470JC](#)
[10HV36N473JC](#) [30HV35N103JC](#) [10HV36N154JC](#) [20HV24B683KN](#) [20HV24B683KC](#) [20HV26B184KN](#)
[20HV26B184KC](#) [20HV35B274KN](#) [20HV35B274KC](#) [20HV24B683KCM](#) [20HV35B274KCM](#) [20HV26B184KCM](#)
[10HV20B102KN](#) [10HV24B104KN](#) [10HV25B224KN](#) [05HV22B224KC](#) [20HV24B473MN](#) [30HV23B472MN](#)
[10HV26B105KC](#) [30HV35N152JC](#) [30HV35N821JC](#) [10HV24B474KNM](#) [10HV26B105KNM](#) [10HV31B473KC](#)
[10HV33B224KC](#) [20HV36B224KN](#) [10HV23B473KN](#) [10HV23B274KC](#) [50HV33N561JN](#) [50HV24B472MN](#)
[10HV36B225KCM](#) [10HV36B225KN](#) [05HV23B274KN](#) [05HV23B274KC](#) [50HV26N102KNM](#) [10HV34B105KN](#)
[75HV33B152K](#) [75HV33B152KC](#) [20HV25N103KNM](#) [05HV23B474KC](#) [10HV33N203JC](#) [10HV33N303JC](#)
[100HV35B562KN](#) [20HV22B103ZC](#) [20HV21B472K](#) [10HV36B225KC](#) [20HV21B103KC](#) [50HV26B123KC](#)
[10HV25B224MN](#) [10HV22B103MC](#) [10HV24N472JCM](#) [75HV36B183KC](#) [10HV26B394MN](#) [20HV22N102KN](#)
[20HV23B273MN](#) [05HV23B474KNM](#) [30HV21B222MNM](#) [30HV21B102KCM](#) [30HV21B332MN](#) [30HV21N271JCM](#)
[30HV26N822KCM](#) [40HV30B181KCM](#) [50HV25N152KCM](#) [10HV23B823KCM](#) [10HV26B394KC](#) [10HV31B104KCM](#)
[20HV21B472KC](#) [20HV23B103KC](#)