


SC-16S

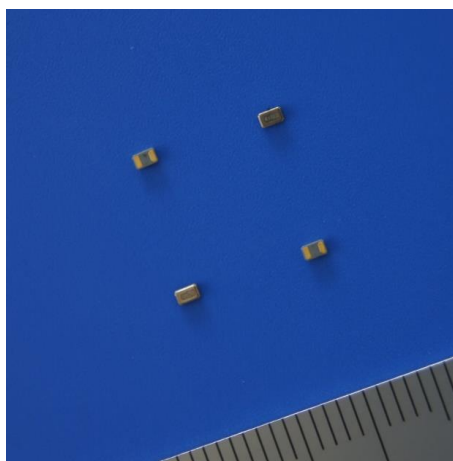

FEATURES

- SMD type suitable for high density surface mounting.
- Thin type with height 0.5mm max.
- Excellent shock and heat resistance.
- Pb-free.
- Complies with EU RoHS directive.
- A crystal resonator processed by high reliable photo-lithographic technology inside.

APPLICATIONS


Mobile Phone, Wearable, Module, Sub-clock function for a variety of Microcomputer, etc.

STANDARD SPECIFICATIONS


Conditions where not specified (Temperature: 25±2°C, DL: 0.1μW)

Item	Symbol	Specifications	Conditions / Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20×10 ⁻⁶	※Please contact us for inquiries regarding available tolerance.
Turnover Temperature	T _i	+25±5°C	
Parabolic Coefficient	B	(-0.036±10%)×10 ⁻⁶ /°C ²	
Load Capacitance	C _L	6.0pF, 7.0pF, 9.0pF, 12.5pF	※Please contact us for inquiries regarding available CL.
Motional Resistance (ESR)	R ₁	90kΩ max.	
Absolute Maximum Drive Level	DLmax.	0.5μW max.	
Level of Drive	DL	0.1μW typ.	
Shunt Capacitance	C ₀	1.2pF typ.	
Frequency Ageing	f_age	±3×10 ⁻⁶	+25±3°C, First Year
Operating Temperature	T _{use}	-40~+85°C	
Storage Temperature	T _{stg}	-55~+125°C	Piece part basis


DIMENSIONS

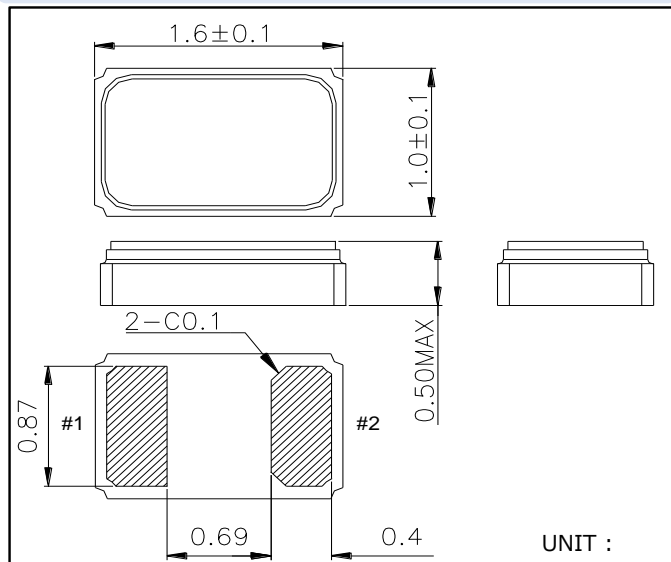

INTERNAL LEAD CONDITIONS

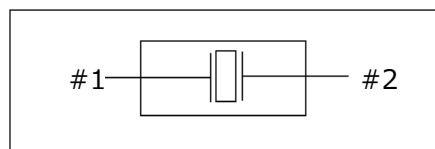

RECOMMENDED SOLDERING PATTERN

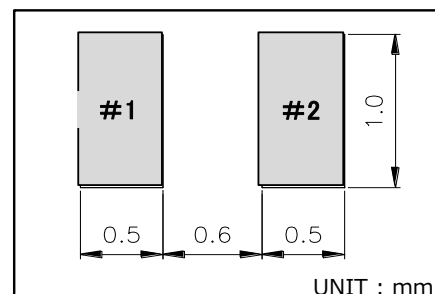

Remark: Please make sure that there is no pattern under SC-16S on the circuit board.