
Requirements for Statshield ESD Bag Storage

For best results, bag inventory should be continually replenished. It is recommended that bags be stored in its original packaging. The user must determine the suitability for use of an ESD bag for his particular application. Bags should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Bags should not be stored in ultraviolet sunlight, moisture, or heat because the aluminum shielding layer could oxidize if exposed to these conditions. Bags should be evaluated by the user to determine acceptability for the user's application. Mishandling or improper storage may render an ESD Bag unusable to perform its function. ESD Bags that are ripped, torn, or scratched should be discarded. Desco Industries, Inc. recommends those tracking useful life of product to use shipping/invoice date as Desco Industries, Inc. expressly warrants that for a period of one (1) year from the date of purchase, Desco Statshield ESD bags will be free of defects in material (parts) and workmanship (labor).

See Desco Industries Inc. limited warranty at <u>Descoindustries.com/Warranty.aspx</u> which states in part: Desco Industries Inc. only obligation shall be to replace such quantity of the product proved to be defective. Desco Industries Inc. shall not be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, users shall determine the suitability of the product for their intended use, and users assume all risk and liability whatsoever in connection therewith.

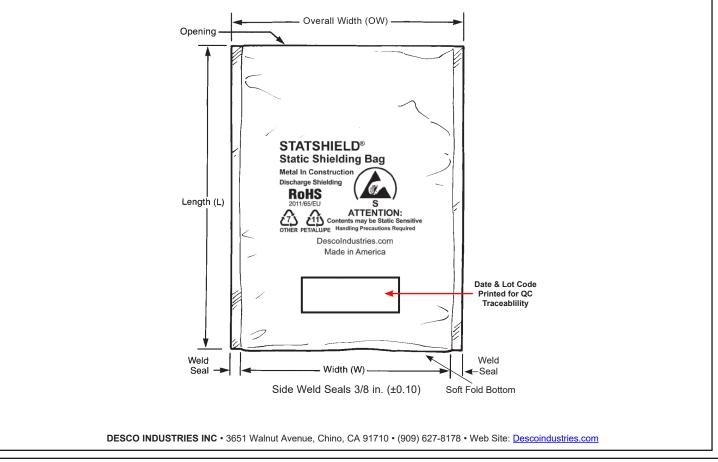

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Desco:

<u>13430</u> <u>1344</u>	5 1346	5 13470	<u>13415</u>	5 13460	13405	<u>5 13505</u>	<u>13524</u>	13325	13700	13500	1321	5 13262	2 13275
<u>13285</u> <u>13695</u>	13710	13645	13610	13640	13616	13675	13665	13655	13660	13602	13698	13726	13630
<u>13615</u> <u>13651</u>	13715	13605	13727	13601	13620	13720	13667	13705	13725	13670	13035	13135	13065
<u>13115</u> <u>13070</u>	13010	13125	13075	13050	13810	13816	13457	13410	13435	13531	13469	13511	13495
13509 13401	13467	13529	13446	13449	13494	13518	13490	13420	13450	13521	13516	13528	13444
<u>13416</u> <u>13471</u>	13459	13402	13453	13425	13476	13527	13448	13403	13440	13533	<u>13515</u>	13428	13424
13526 13443	13517	13498	<u>13480</u>	<u>13508</u>	13458	13429	13530	13497					