

STRAIGHT PLUG CRIMP TYPE


CABLE 5/50 D

R141.083.000

Series:

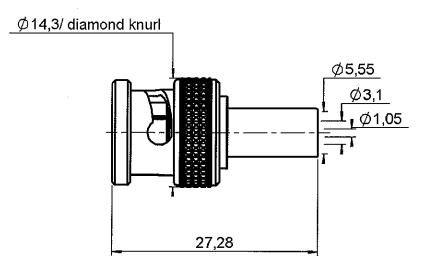





All dimensions are in mm.



| COMPONENTS | MATERIALS | PLATING (μm) | | |
|----------------|-----------------|------------------------|--|--|
| BODY | BRASS | NICKEL 2 | | |
| CENTER CONTACT | BRASS | GOLD 0.5 OVER NICKEL 2 | | |
| OUTER CONTACT | - | - | | |
| INSULATOR | PTFE | | | |
| GASKET | SILICONE RUBBER | | | |
| OTHERS PARTS | BRASS | NICKEL 2 | | |
| - | - | - , | | |
| - | - | - | | |

Issue: 0619 F

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STRAIGHT PLUG CRIMP TYPE

CABLE 5/50 D

R141.083.000

Series:

PACKAGING

| Standard | Unit | Other |
|----------|------------|------------|
| 100 | 'W' option | Contact us |

ELECTRICAL CHARACTERISTICS

Impedance

50 Ω

Frequency

0-4 GHz

VSWR

 $1.3 + 0.0000 \times F(GHz)$ Maxi

Insertion loss

0.115 $\sqrt{F(GHz)}$ dB Maxi

RF leakage

57 - F(GHz)) dB Maxi

Voltage rating Dielectric withstanding voltage 500 Veff Maxi

1500 Veff mini

Insulation resistance

5000 $M\Omega$ mini

MECHANICAL CHARACTERISTICS

Center contact retention

Axial force – Mating end

27 N mini

Axial force – Opposite end

27 N mini

Torque

NA N.cm mini

Recommended torque

Mating Panel nut NA N.cm

Clamp nut

NA N.cm NA N.cm

A/F clamp nut

0,0000 mm

Mating life

500 Cycles mini

Weight

8,7890 g

ENVIRONMENTAL

Operating temperature

-65/+165 ° C

Hermetic seal

NA Atm.cm3/s

Panel leakage

NA

SPECIFICATION

CABLE ASSEMBLY

| Stripping | a | b | С | d | е | f |
|-----------|------|------|------|------|------|------|
| mm | 4,00 | 8,50 | 15,0 | 0,00 | 11,0 | 0,00 |

Assembly instruction:

Crimp 02

Recommended cable(s)

RG 223

RG 142 RG 400

KX 23

RG 142 FTX

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off

220 N mini

- torque

NA N.cm

TOOLING

| Part Number | Description | Hexagon |
|--------------|---------------|-----------|
| | | |
| R282.223.000 | CRIMPING TOOL | 1.73-5.41 |
| R282.235.011 | CRIMPING DIES | 1.73-5.41 |
| R282.293.000 | CRIMPING TOOL | - |

OTHER CHARACTERISTICS

Issue: 0619 F

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

R141083000 R141083000W