

Cornell Dubilier

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Engineering

Catalog Number: FAS220-250-AA

Customer Part Number: None

Datasheet No.: 4210

Date: 05/06/98

Capacitance: 220 μ F

Tolerance: - 10% + 50%

Working Volts: 250VDC

Surge Volts: 300VDC

Leakage Current @ 25°C: 1410 μ A

ESR @ 120Hz @ 25°C: 1.05 Ω max.

Ripple Current @ 120 Hz, 85°C: 1.0A

Diameter (D): 1.375 \pm 0.031 inches

Length (L): 2.125 \pm 0.062 inches


Total Length, W/Insulation (TL): 2.390 \pm 0.062 inches

Terminal Spacing (S): 0.500 \pm 0.016 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

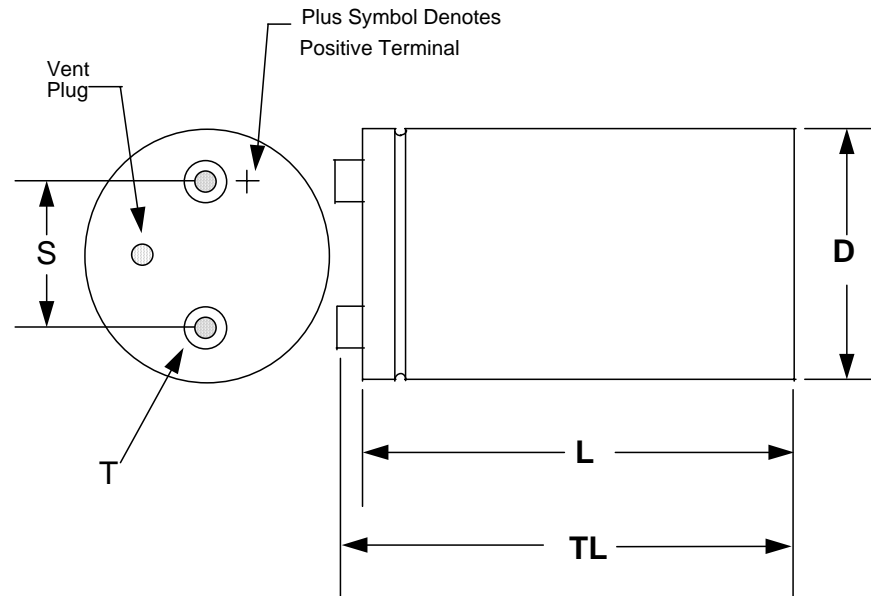

“Controlled Copy” if viewed on CD Server or if copy is stamped in Red, Otherwise considered as an “Uncontrolled Copy”

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cornell Dubilier:](#)

[FAS220250AA](#)