



DC PASS, HIGH POWER

Power Splitter/Combiner **ZN4PD-4R722+**

Mini-Circuits

4 Way-0° 50Ω 400 to 7200MHz

THE BIG DEAL

- Power handling up to 30 W
- Wide frequency band, 400 to 7200 MHz
- Low insertion loss, 0.9 dB typ.
- Low amplitude unbalance 0.06 dB typ.
- Low phase unbalance 1 deg. typ.
- High isolation, up to 27 dB

APPLICATIONS

- High band PCS
- UNII
- ISM 802.11A
- WiFi
- Bluetooth

PRODUCT OVERVIEW

Mini-Circuits' ZN4PD-4R722+ is a 4-way 0° high-power splitter/combiner providing 30W power handling as a splitter (5W as a combiner) and low insertion loss across the 400 to 7200 MHz frequency range. Its outstanding combination of high power handling and low loss minimize power dissipation and provide excellent signal fidelity from input to output. The ZN4PD-4R722+ comes housed in a rugged aluminum alloy case measuring 3.8 x 3.2 x 0.55" with a common SMA port on one side and four SMA ports on opposite side of the case.

KEY FEATURES

Feature	Advantages
Wideband, 400 to 7200 MHz	This model supports bandwidth requirements for a wide variety of applications.
High power handling: <ul style="list-style-type: none"> • 30W as a splitter • 5.0W as a combiner 	The ZN4PD-4R722+ is suitable for a wide range of power requirements.
Low insertion loss, 0.9 dB	The combination of 30W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
Low unbalance: <ul style="list-style-type: none"> • 0.06 dB amplitude unbalance • 1° phase unbalance 	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 0.77A (193mA each port)	Supports applications where DC power is needed through the RF line.



Generic photo used for illustration purposes only

Model No.	ZN4PD-4R722+
Case Style	UU2413-6
Connectors	SMA-Female

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

REV. OR
ECO-011123
ZN4PD-4R722+
GY/CP/PS
211216





DC PASS, HIGH POWER

Power Splitter/Combiner ZN4PD-4R722+

Mini-Circuits

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		400		7200	MHz
Insertion Loss (above 6.0 dB)	400-4200	-	0.75	1.5	dB
	4200-7200	-	1.4	2.5	
Isolation	400-700	16	25.8	-	dB
	700-6000	19	29.3	-	
	6000-7200	16	24.4	-	
Phase Unbalance (\pm) ¹	400-7200	-	1.3	12	Degree
Amplitude Unbalance (\pm) ¹	400-7200	-	0.1	0.5	dB
VSWR (Port S)	400-700	-	1.6	2	:1
	700-6000	-	1.2	1.6	
	6000-7200	-	1.1	1.6	
VSWR (Port 1-4)	400-700	-	1.2	1.35	:1
	700-6000	-	1.1	1.3	
	6000-7200	-	1.1	1.3	
Power Handling ³	As Splitter ¹	400-7200	-	30	W
	As Combiner ²	400-7200	-	5	

1. All outputs must terminate 50 ohm (VSWR 1.5:1 or better)

2. As a combiner of non-coherent signals, max. power per port is 1.25 watt


3. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 60°C, in order to ensure proper performance.

MAXIMUM RATINGS

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
DC Current	0.77A (193mA each) port

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

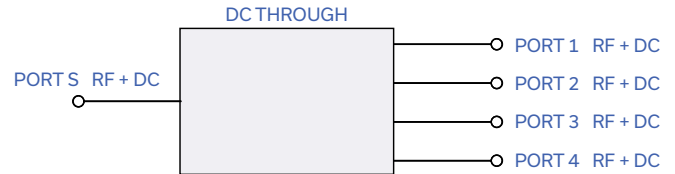



DC PASS, HIGH POWER


Power Splitter/Combiner **ZN4PD-4R722+**

Mini-Circuits

COAXIAL CONNECTIONS

Sum Port	S
Port 1	1
Port 2	2
Port 3	3
Port 4	4

OUTLINE DRAWING

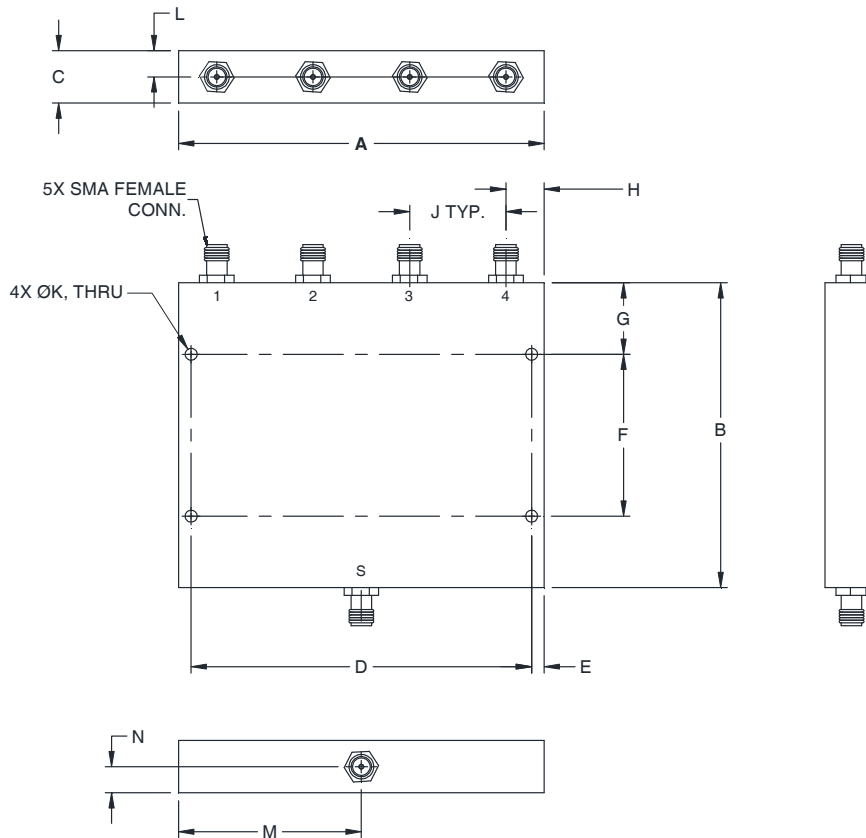

CASE#	A	B	C	D	E	F	G	H	J	K	L
UU2413-6	3.80 (96.5)	3.20 (81.3)	.55 (14.0)	3.540 (89.92)	.130 (3.30)	1.700 (43.18)	.750 (19.05)	.40 (10.1)	1.00 (25.4)	.125 (3.18)	.28 (7.0)

CASE#	M	N	WT, GRAM
UU2413-6	1.90 (48.26)	.28 (7.0)	85

Dimensions are in inches (mm). Tolerances: 2 Pl. + .03; 3 Pl. + .015





DC PASS, HIGH POWER




Power Splitter/Combiner ZN4PD-4R722+

Mini-Circuits

TYPICAL PERFORMANCE DATA

Freq. (MHz)	Total Loss ¹ (dB)				Amp Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR	VSWR	VSWR	VSWR	VSWR
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
400	6.64	6.59	6.84	6.63	0.25	19.11	23.75	19.16	0.21	1.84	1.21	1.22	1.20	1.21
500	6.71	6.67	6.82	6.70	0.15	20.56	30.27	20.60	0.25	1.90	1.27	1.28	1.26	1.27
600	6.43	6.36	6.46	6.41	0.10	28.80	48.07	28.83	0.41	1.44	1.22	1.24	1.22	1.22
700	6.41	6.34	6.34	6.40	0.08	30.69	35.41	30.95	0.45	1.22	1.13	1.14	1.13	1.13
1000	6.52	6.47	6.55	6.51	0.08	26.60	31.74	26.61	0.33	1.31	1.07	1.07	1.07	1.07
2000	6.67	6.61	6.65	6.65	0.05	40.54	38.55	41.05	0.69	1.06	1.10	1.10	1.10	1.10
3000	6.92	6.89	6.86	6.90	0.06	27.68	31.93	27.53	0.96	1.27	1.11	1.10	1.09	1.10
4000	7.08	7.06	7.11	7.03	0.09	27.16	49.32	27.36	1.23	1.31	1.16	1.15	1.15	1.14
5000	7.22	7.22	7.32	7.17	0.15	28.22	33.95	28.11	1.71	1.19	1.05	1.04	1.04	1.04
6000	7.48	7.53	7.48	7.42	0.12	22.51	32.49	22.54	2.08	1.32	1.06	1.06	1.06	1.05
7000	7.53	7.59	7.52	7.48	0.13	24.82	28.57	24.99	2.31	1.08	1.13	1.11	1.10	1.14
7200	7.67	7.68	7.34	7.61	0.36	18.97	26.05	19.02	2.43	1.08	1.18	1.14	1.13	1.18

1. Total Loss = Insertion Loss + 6dB splitter loss.

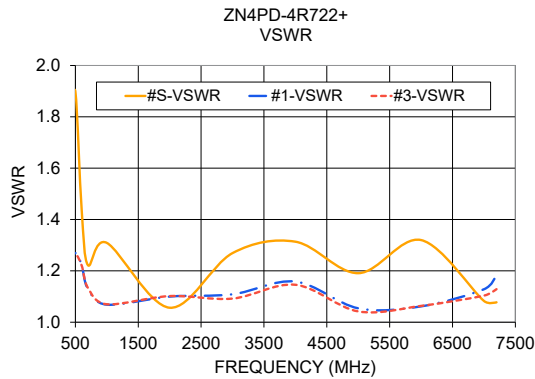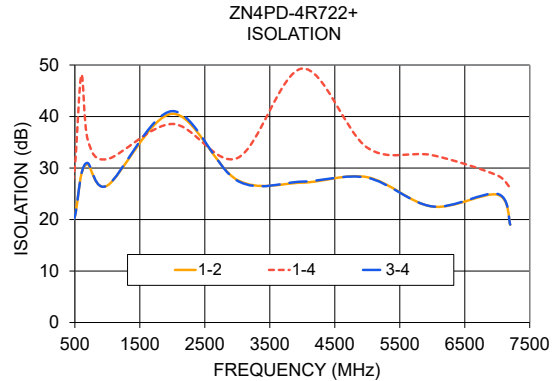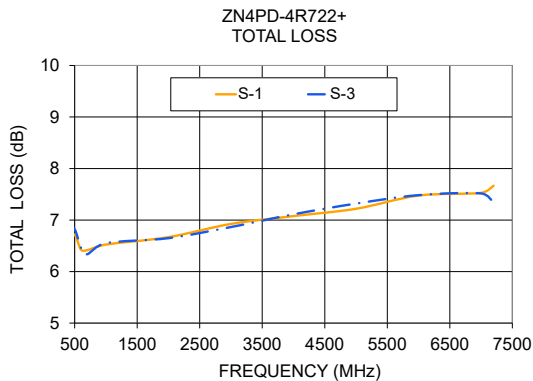

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZN4PD-4R722+](#)