

Cartridge Fuse, 6.3x32 mm, 500 VAC, 1-8 A, High Breaking Capacity of 1500 A

new



UL 248-14 · 500VAC · Quick-Acting F



Description

- High breaking capacity
- High rated current
- Pigtails optional

Standards

- UL 248-14
- CSA C22.2 no. 248.14

Approvals

- UL File Number: E41599

Applications

- 3-phase applications
- Industrial electronic
- Power supplies
- Frequency converter
- Power electronics


References

[Packaging Details](#)
Pigtail Type [SHF 6.3x32 Pigtail](#)

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	500VAC
Rated current	1 - 8A
Breaking Capacity	1500A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Tube	Ceramic
Material: Endcaps	Nickel-Plated Copper Alloy
Material: Axial Leads	Tin-Plated Copper
Unit Weight	2.84 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Type, Rated current, Rated voltage, Characteristic, Breaking capacity, Approvals

Dimension


6.3 mm

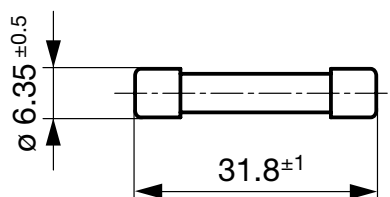

Pre-Arcing Time

Rated Current I_n	1.5 x I_n min.	2.1 x I_n max.	2.75 x I_n min.	2.75 x I_n max.	4.0 x I_n min.	4.0 x I_n max.	10.0 x I_n min.	10.0 x I_n max.
1 A - 1 A	60 min	30 min	20 ms	1.5 s	8 ms	400 ms	-	20 ms
1.25 A - 8 A	60 min	30 min	100 ms	5 s	20 ms	1 s	-	50 ms

Time-Current-Curves

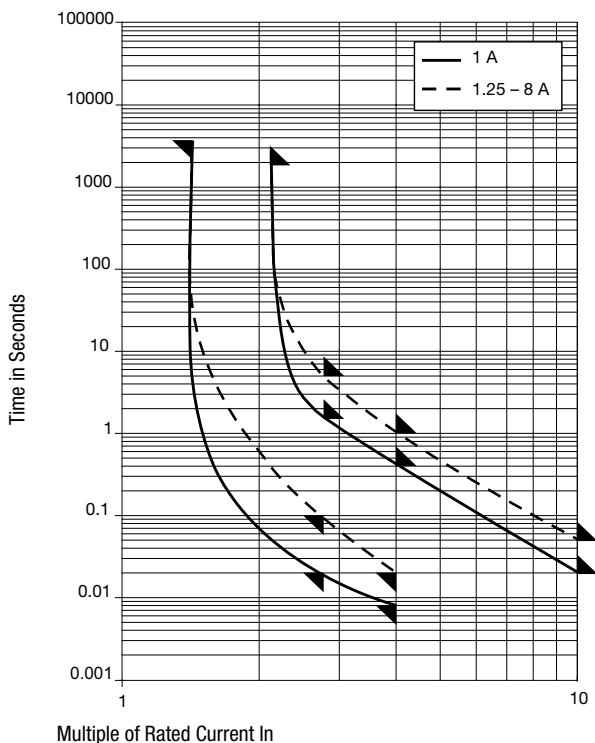

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I_n max. [mV]	Power Dissipation 1.5 I_n max. [mW]	Melting I^2t 10.0 I_{ntyp} [A ² s]	Order Number
1	500	1)	400	1200	1.5	● 8020.5068
1	500	1)	400	1200	1.5	● 8020.5068.G
1.25	500	1)	300	1300	2.9	● 8020.5069
1.25	500	1)	300	1300	2.9	● 8020.5069.G
1.6	500	1)	300	1400	5.8	● 8020.5070
1.6	500	1)	300	1400	5.8	● 8020.5070.G
2	500	1)	280	1700	2	● 8020.5071
2	500	1)	280	1700	2	● 8020.5071.G
2.5	500	1)	260	2000	3.8	● 8020.5072
2.5	500	1)	260	2000	3.8	● 8020.5072.G
3.15	500	1)	240	2300	8.6	● 8020.5073
3.15	500	1)	240	2300	8.6	● 8020.5073.G
4	500	1)	220	2900	14.6	● 8020.5074
4	500	1)	220	2900	14.6	● 8020.5074.G
5	500	1)	190	2900	33.2	● 8020.5075
5	500	1)	190	2900	33.2	● 8020.5075.G
6.3	500	1)	170	3400	61.6	● 8020.5076
6.3	500	1)	170	3400	61.6	● 8020.5076.G
8	500	1)	160	3700	120	● 8020.5077
8	500	1)	160	3700	120	● 8020.5077.G

Most Popular:

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In max. [mV]	Power Dissipation 1.5 I _n max. [mW]	Melting I ² t 10.0 Intyp. [A ² s]	Order Number
-------------------	---------------------	-------------------	-------------------------------	--	---	--------------



Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 1500 A @ 500 VAC

Packaging Unit	xxxx.xxxx	Small Box Pack (10 pcs.)
	xxxx.xxxx.G	Bulk (1000 pcs.)