





**SIDE VIEW**

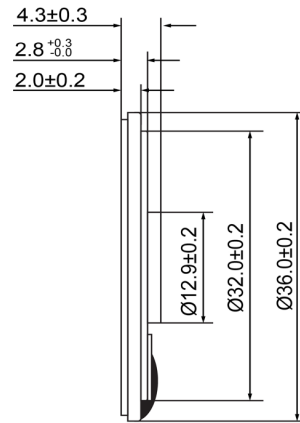

**BOTTOM VIEW**



Specifications			Notes	Revision History											
Description	Value	Unit		Version	Description		Date	Approved							
Shape	Round		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S							
Resonant Frequency	420	(Hz)													
Frequency Range	420 ~ 5,600	(Hz)													
SPL @ 10cm	93	(dBA)													
Impedance	16	(Ohm)													
Cone Material	Mylar														
Nominal Power	0.2	(W)													
Max Power	0.4	(W)													
Mount Type	Flush														
Operating Temperature	-40 ~ +66	°C													
Storage Temperature	-40 ~ +66	°C													
Weight	8.7	(g)													
 <b>DB UNLIMITED</b>			 <b>Dynamic Speaker</b>			<b>SM360416-2</b>									
											Drawn by	Date	Checked by	Date	Approved by
			A.B.			10/21/2013		C.E.		10/21/2013		J.S		10/21/2013	

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).