

"High Frequency Ceramic Solutions"

5.5 GHz Band Pass Filter

P/N 5515BP15B975

Detail Specification: 12/5/2012

Page 1 of 2

General Specifications


Part Number	5515BP15B975	Return Loss	9.5 dB min.
Frequency (MHz)	4900 - 5875	Impedance	50 Ω
Attenuation (min.)	30 dB @ 3500 MHz	Input Power	2W max. (CW)
Attenuation (min.)	25 dB @ 9800 - 11840 MHz	Operating Temperature	-40 to +85°C
Attenuation (min.)	5 dB @ 14700 - 17760 MHz	Reel Quantity	4,000
Insertion Loss	1.5 dB max.		

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 5515BP15B975S
		T & R	Suffix = T	eg. 5515BP15B975E
		100% Tin	Suffix = None	eg. 5515BP15B975(E or S)
	Termination style	Tin / Lead	Suffix = /Pb	eg. 5515BP15B975(E or S)/Pb
	Eval board (50 ohm SMA)	5515BP15B975-EB-SMA		



Mechanical Dimensions

	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.051 ± 0.006	1.30 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 + 0.006	0.25 + 0.15
d	0.014 + 0.006	0.35 + 0.15

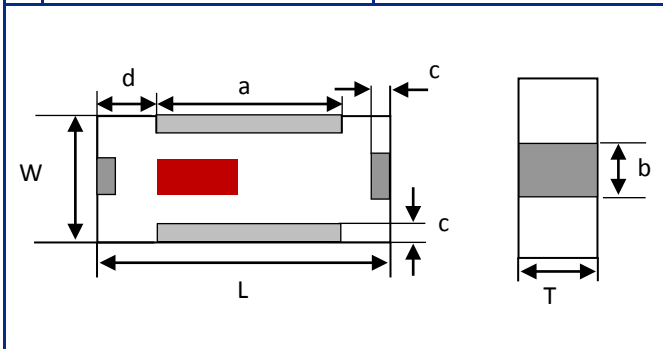

Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN

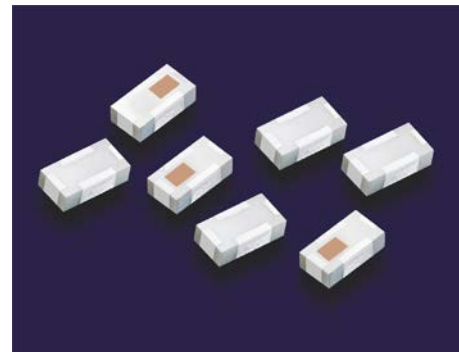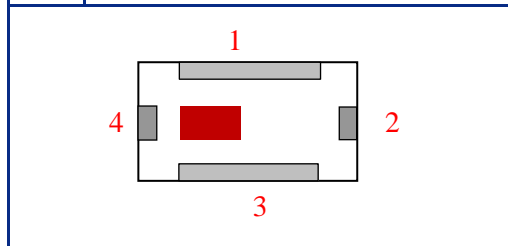

"High Frequency Ceramic Solutions"

5.5 GHz Band Pass Filter

Detail Specification: 12/5/2012


P/N 5515BP15B975

Page 2 of 2

Mounting Considerations


Mount these devices with brown mark facing up.

*Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

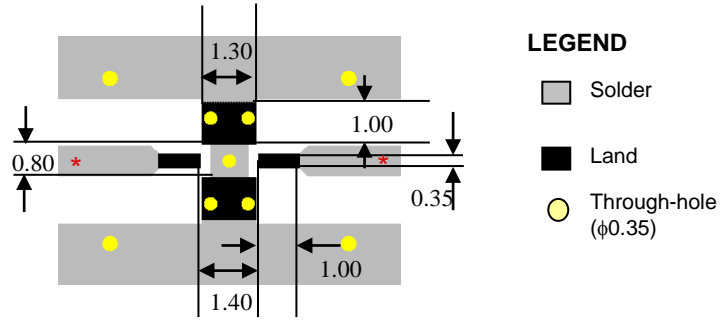

Units: mm

Typical Electrical Performance (T=25°C)

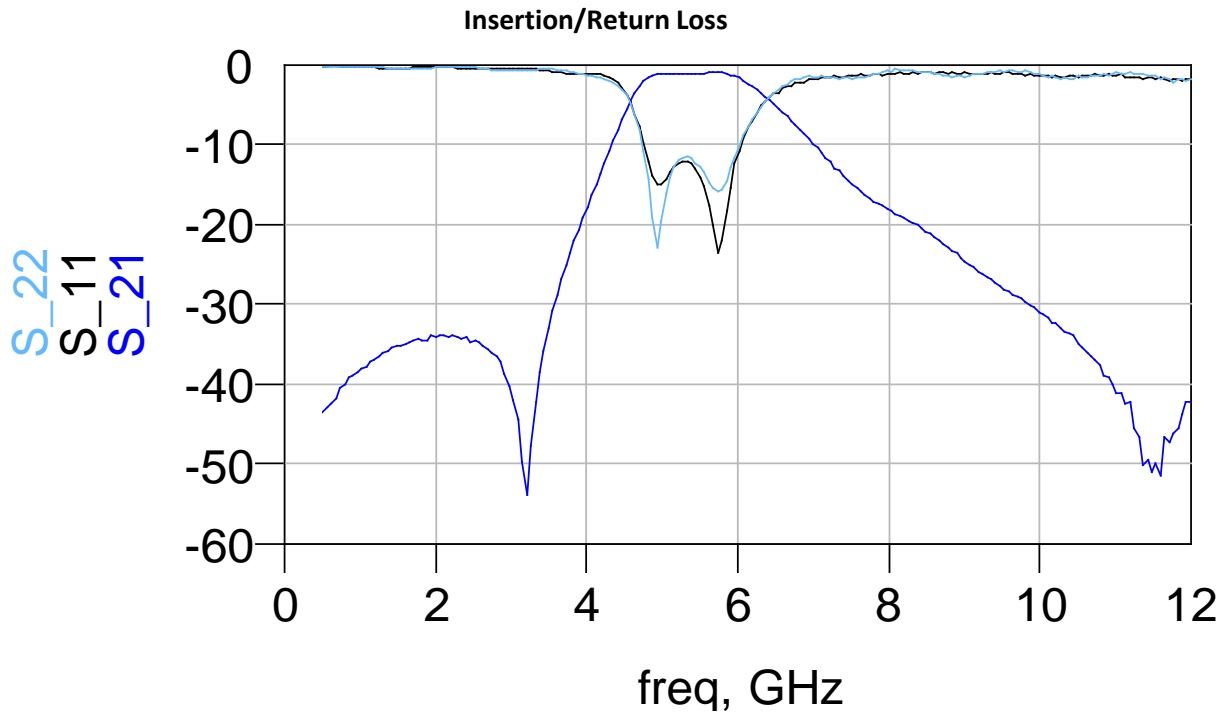

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[5515BP15B975E](#)