Four pole distribution blocks

DIN 3

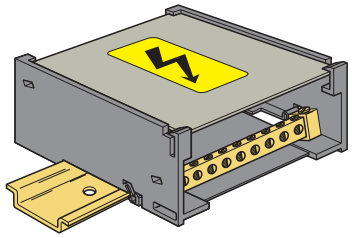

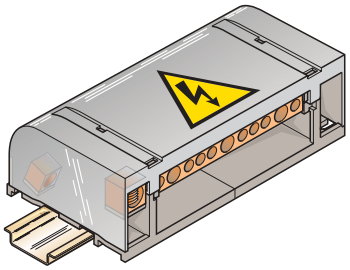

BADH	th. 12 mm	**0116 900.27**
BAM	th. 9,1mm	**0103 002.26**
BADL	th. 9,0 mm	**0199 408.02**
Other end stops : See Accessories section		
PR30	35 x 7,5 x 1	**0173 220.05**
PR4	35 x 15 x 2,3	**0168 500.12**
PR5	35 x 15 x 1,5	**0101 598.26**
Other rails : See Accessories section		
Other accessories : See Accessories section		

BRT 80 A

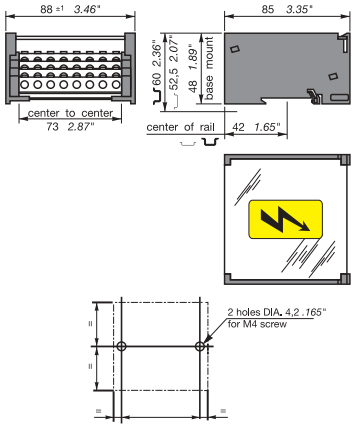

Rail or base mounted
Color : grey

Type	
Grey body	
BRT 80 A	**0179 534.22**

Characteristics	IEC	UL	CSA
Rated voltage	600 V	600 V	
Rated current	80 A	65 A	
Short circuit current	21,6 kA / 3 kA 1s.	21,6 kA	
Input	16 mm²	6 AWG	
Outputs (with ferrule)	8 x 10 mm²	8 x 8 AWG	
Weight			
	210 gram		
	0.463 lb		

Accessories	Type

BRT 125 A

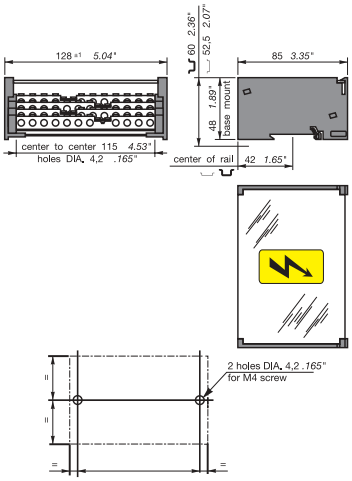

Rail or base mounted
Color : grey

Type	
Grey body	
BRT 125 A	**0179 535.23**

Characteristics	IEC	UL	CSA
Rated voltage	600 V	600 V	
Rated current	125 A	65 A	
Short circuit current	29,6 kA / 4,2 kA 1s.	29,6 kA	
Input	35 mm²	4 - 2 AWG	
Outputs (with ferrule)	4 x 16 mm²	4 x 6 AWG	
	7 x 10 mm²	7 x 8 AWG	
Weight			
	300 gram		
	0.661 lb		

Accessories	Type

BRT 160 A

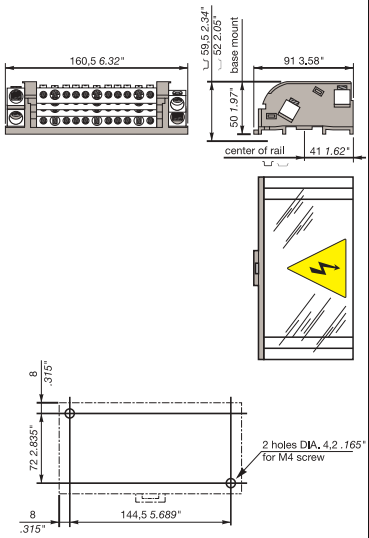

Rail or base mounted
Color : grey

Type	
Grey body	
BRT 160 A	**0179 892.22**

Characteristics	IEC	UL	CSA
Rated voltage	600 V	600 V	600 V
Rated current	160 A	160 A	160 A
Short circuit current	20 kA / 6,2 kA 1s.		
Input	10 to 50 mm²	6 to 0 AWG	6 to 0 AWG
Outputs (with ferrule)	3 x 6 to 35 mm²	3 x 10 to 2 AWG	3 x 10 to 2 AWG
	8 x 2,5 to 16 mm²	8 x 14 to 6 AWG	8 x 14 to 6 AWG
Weight			
	380 gram		
	0.837 lb		

Accessories	Type