



# INTERCONNECTS


## SERIES 830, 831, 832, 833 • 2mm GRID HEADERS AND SOCKETS • SINGLE AND DOUBLE ROW STRIPS

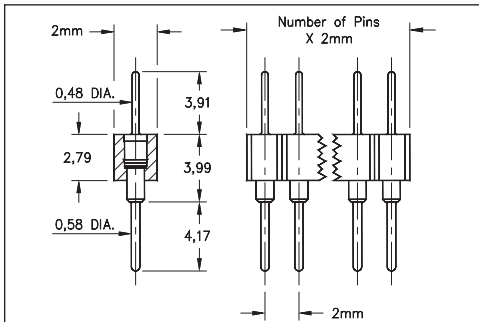


**FIG. 1**

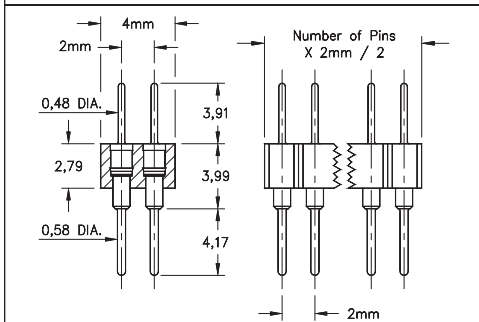

**FIG. 2**

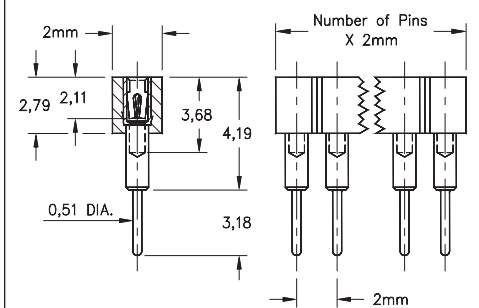


**FIG. 3**

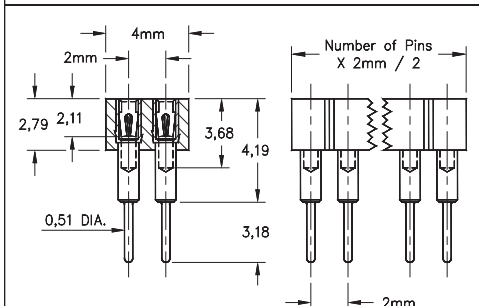







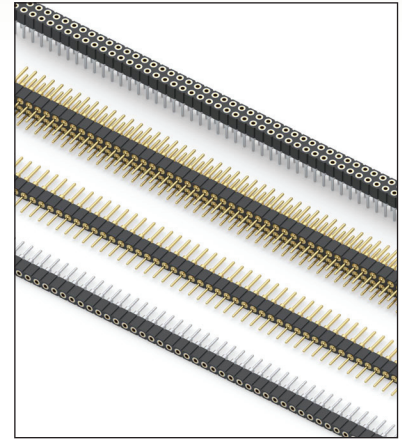







**FIG. 4**

- Series 830 single & double row interconnects have 2mm pin spacing and permit board stacking as low as 8,18
- Pin headers (830 & 832 series) use MM #5012 pins. See page 208 for details
- Sockets (831 & 833 series) use MM #1802 receptacles and accept pin diameters from 0,38 - 0,64. See page 169 for details
- Contact is rated at 3 amps
- Insulators are high temperature thermoplastic, suitable for all soldering operations



### ORDERING INFORMATION

<b>FIG. 1</b>	<b>Series 830...001</b>	<b>Single Row Pin Header</b>		
	830-XX-0	-10-001000	Specify number of pins → 01-50	
<b>FIG. 2</b>	<b>Series 832...001</b>	<b>Double Row Pin Header</b>		
	832-XX-	-10-001000	Specify number of pins → 004-100	
  				
<b>SPECIFY PLATING CODE XX=</b>		10 	90	40 
Pin Plating 		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn

<b>FIG. 3</b>	<b>Series 831...001</b>	<b>Single Row Socket</b>				
	831-XX-0	-10-001000	Specify number of pins → 01-50			
<b>FIG. 4</b>	<b>Series 833...001</b>	<b>Double Row Socket</b>				
	833-XX-	-10-001000	Specify number of pins → 004-100			
  						
<b>SPECIFY PLATING CODE XX=</b>		91	93	41 	43 	47 
Sleeve (Pin) 		5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn	5,08µm Sn
Contact (Clip) 		0,25µm Au	0,76µm Au	0,25µm Au	0,76µm Au	Au Flash

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mill-Max:](#)

[831-43-009-10-001000](#) [831-47-008-10-001000](#) [833-47-100-10-001000](#)