
NOTES:	THIRD ANGLE PROJ. 🕁 🚭	
I. MATERIALS AND FINISHES:		REV DESCR
SMA PLUG & PROBE CONNECTOR BODY - BRASS, GOLD PLATING INSULATOR - PTFE, NATURAL CONTACT - BRASS, GOLD PLATING		A RELEASE TO T
CABLE - ØI.37 BLACK CABLE		
2. ELECTRICAL:		
A.IMPEDANCE : 50Ω		
3. MECHANICAL PERFORMANCE		
A.SPRING FORCE OF TESTED PIN : I.5N MIN. TO 3.5N MAX B.TEMP.RANGE : -40°C~+85°C		
4. PACKAGING A. QUANTITY: SINGLE PACK B. MARKING : BAG TO BE MARKED "AMPHENOL RF, 95-668-45108 AND DATE CODE"		
5. FOR USE WITH SWITCH 902-9235		
250.00±0.05		
Ø I. 37 BLACK CABLE		
	`	
ΤΥΡ(2)		
DESIGN REQUIREMENTS:		
X FREQUENCY : DC TO 6 GHZ X CONTINUITY		
X VSWR : 1.5 MAX (DC TO 3 GHz) X HI-POT : 300 VAC		
I.8 MAX (3 TO 6 GHz) X INS. LOSS : -I.5 dB MAX (DC TO 3 GHz) OTHER		OUETO
-2.5 dB MAX (3 TO 6 GHz)		
< 0.5 mm	DRAWN DATE C. VIGORITO 07-May-19	TITLE
\pm 0.05mm \pm 0.1mm \pm 0.2mm \pm 0.3mm \pm 1° SEE NOTES NOTICE - These drawings, specifications, or other data (1) are, and remain the	ENGINEER DATE	SMA PLUG TO PROBE PL USING I.37 BLACK CAB
	MADHAN G 23-Jun-14	250.00 MM LENGTH
not to be regarded by implication or otherwise in any manner licensing, granting EAR # 6126 & 9024	APPROVED DATE K. CAPOZZI 18-Jun-19	SCALE: 2.5:1.0 SHEET 2 OF
product, process or design, patented or otherwise, that may in any way be related to	CAD FILE	DWG SIZE
FINISH		В

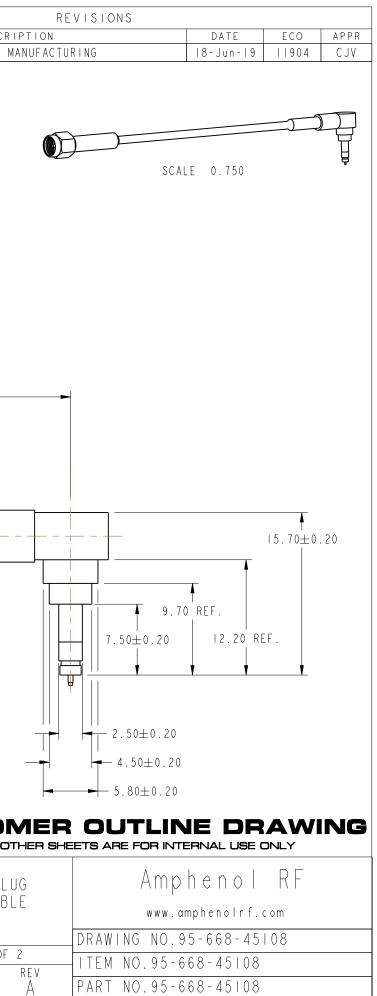

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 095-668-45108