


FB-EM-30345-000

SHEET 2.1

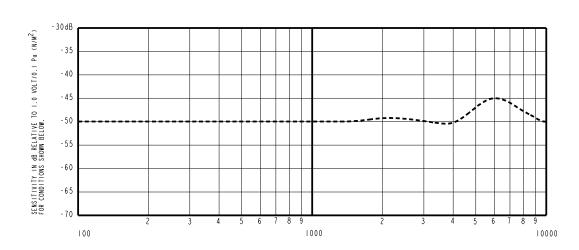


FREQUENCY IN HERTZ

	2FN2111A1	ΙY				
FREQUENCY	MIN.	NOM.	MAX.		ONFORMITY	
300		-50.0		RANGE OF DEVIA	TION FROM	I K H z
1000	-54.0	-50.0	- 46	- 4 . 0	+4.0	
2000		-49.5		0.0	0.0	
6000		-45.5		- 4 . 0		
				0.0	+9	

NOTES

- I. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 2. SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- 3. TEST CONDITIONS:
 HEAD OF BOOM EXPOSED TO 74 dBSPL SWEPT
 SOUND FIELD AT 6mm FROM VOICE APERTURE.
 ARTIFICIAL VOICE:
 B & k 4227 MOUTH SIMULATOR.
- 4. FOR MICROPHONE CAPSULE SPEC. SEE DRAWING NR-25994-D63 SHEET 2.1.
- 5. SURVIVES SUBMERSION IN 20m OF WATER FOR 5 MINYTES; SENSITIVITY WITHIN 34B OF INITIAL SENSITIVITY AFTER DRIED FOR 30 MINUTES AT ROOM TEMPERATURE.





<u>LEAD IDENTIFICATION</u> <u>& TEST CIRCUIT</u>

PERFORMANCE SPECIFICATION

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
					0
В	C10107747	8-9-08	l Active	H	
Α	C10107368	5-27-08	***************************************		נ
			INSPECTION ACCEPTANCE/REJECTION	DR. BY	DATE

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION

ENTITERIA. CORRELATION OF TEST EQUIPMENT WITH MODILES IS ALSO REQUIRED FOR

TIT 5-27-08

ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE:

BOOM MICROPHONE FB-EM-30345-000

GUP 6-4-08

APP. 81 DATE

APP. 81 DATE

SHT 2.1

6 - 4 - 08

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

FB-EM-30345-000