


REV.	DESCRIPTION/ECO NO.	DATE
	Release	1/27/14
A	Add side view	8/20/15
B	Revise lead length	4/11/23

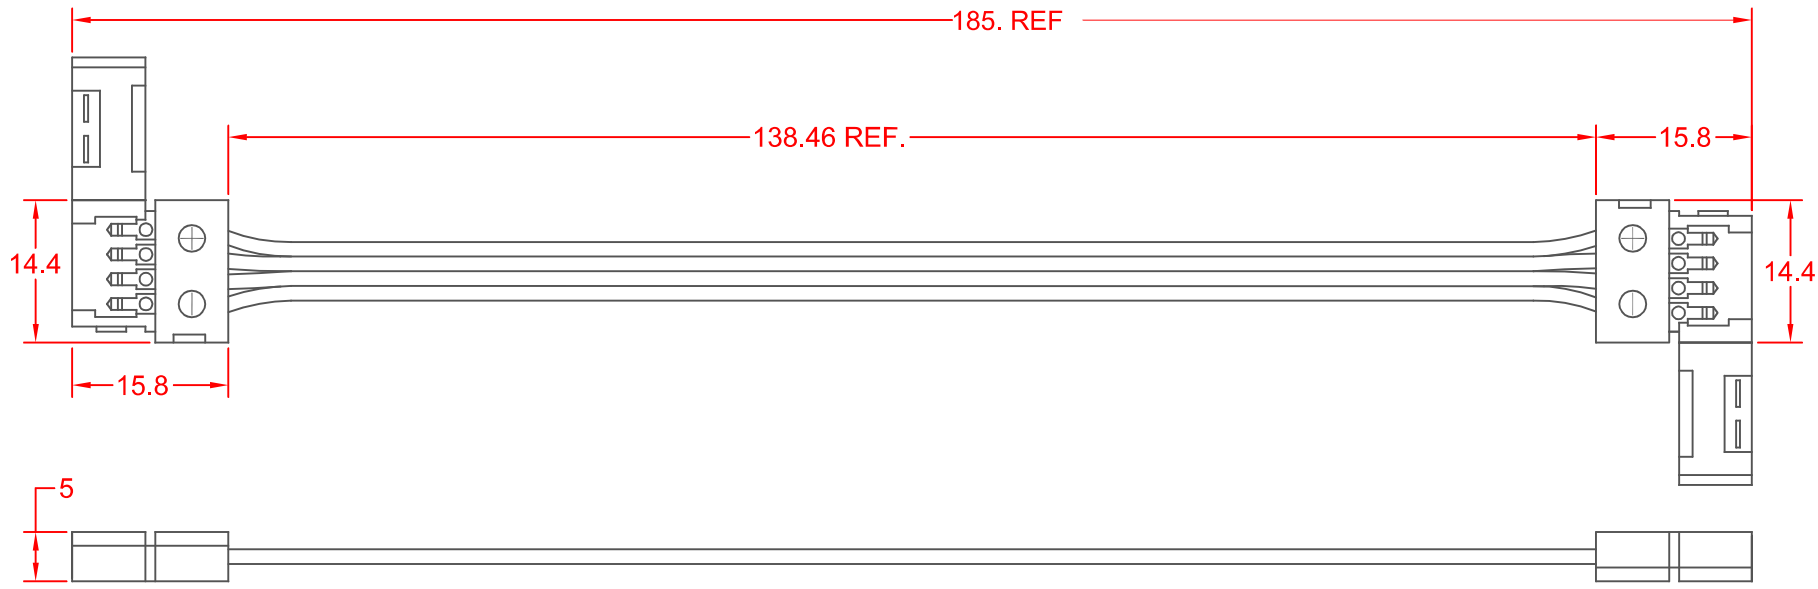

NOTES:

1. OPERATION

1. GENTLY LIFT LATCH AT SIDE OF CONNECTOR.
2. SWING COVER OFF OF CONTACTS.
3. SLIDE THE FLEX TAPE INTO THE CONNECTOR PLACING THE EDGE OF THE FLEX TAPE UNDER 2 HOLD DOWN TABS. MAKE SURE THE POLARITY IS MATCHED BETWEEN THE FLEX TAPE AND THE CONNECTOR COVER.
4. FOLD OVER THE COVER AND PRESS IN PLACE UNTIL THE LATCH IS FULLY ENGAGED.

2. LIMIT CURRENT TO A MAXIMUM OF 5 AMPS.

4 PIN JOINER CONNECTOR
WIRE TYPE: UL1007, 22 AWG

USED WITH JKL RGB LED FLEX LIGHT RIBBON
PART NO.: ZFS-10504-RGB

JKL PART NO.: ZCH-170-RGB-J

<p>THIRD ANGLE PROJECTION</p>	<p>METRIC</p>	<p>DIMENSIONS ARE IN mm (INCHES)</p>	<p>JKL COMPONENTS CORPORATION</p>				
	<p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- REF.</p> <p>2 PL +/- REF.</p> <p>ANGLE +/- 0</p>						<p>TITLE</p> <p>RGB FLEX RIBBON JOINER CONNECTOR HARNESS</p>
<p>DRAWN BY</p> <p>L. WENGSTROM</p>	<p>APPV'D BY</p> <p>L.R.</p>	<p>DATE</p> <p>8/20/15</p>	<p>SIZE</p> <p>A</p>	<p>FSCM NO.</p> <p>55335</p>	<p>DRAWING NO.</p> <p>ZCH-170-RGB-J</p>		
			<p>SCALE</p> <p>NONE</p>	<p>RELEASED DATE</p> <p>1/27/14</p>	<p>REVISION DATE</p> <p>4/11/23</p>	<p>REV. NO.</p> <p>B</p>	<p>SHEET</p> <p>1 OF 1</p>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JKL Components:](#)

[ZCH-170-RGB-J](#)