


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ECO #7564	04/27/09	M.J.



NOTES:

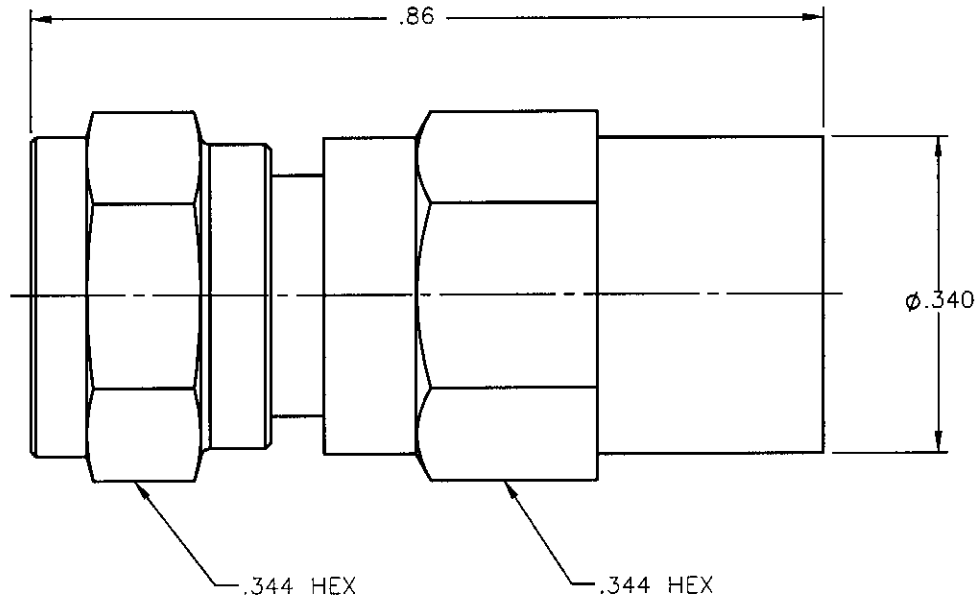

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
4. RESISTOR = METAL FILM PER MIL-R-10509, 75 OHMS $\pm 1\%$.

FINISH:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

Property of Radiall Incorporated
 This document cannot be reproduced or
 communicated to a third party without prior
 written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: M.J.	DATE 04/27/09	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
	CHKD:	DATE 04/27/09	
DECIMAL	ANGLE	D.N.	75 OHM SMC PLUG DUMMY LOAD RESISTIVE TERMINATION ADAPTER
		APVD: J.M.	
REFERENCE:	MATERIALS & FINISHES: SEE NOTES		SIZE: A FSCM NO.: 19505 DWG NO.: 1736-1511-075 REV: A
ORIGINATED: D.N. DATE: 10/17/90			SCALE: 5:1 THIRD ANGLE PROJECTION  SHEET 1 OF 1

1736-1511-075

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[1736-1511-075](tel:1736-1511-075)