


**X3-Class HiPerFET™  
Power MOSFET**
**IXFA60N25X3  
IXFP60N25X3  
IXFQ60N25X3**

$$V_{DSS} = 250V$$


$$I_{D25} = 60A$$

$$R_{DS(on)} \leq 23m\Omega$$


 N-Channel Enhancement Mode  
Avalanche Rated  
Fast Intrinsic Diode


| Symbol        | Test Conditions  | Maximum Ratings    |            |
|---------------|--|--------------------|------------|
| $V_{DSS}$     | $T_J = 25^\circ C$ to $150^\circ C$                                | 250                | V          |
| $V_{DGR}$     | $T_J = 25^\circ C$ to $150^\circ C$ , $R_{GS} = 1M\Omega$          | 250                | V          |
| $V_{GSS}$     | Continuous   | $\pm 20$           | V          |
| $V_{GSM}$     | Transient  | $\pm 30$           | V          |
| $I_{D25}$     | $T_C = 25^\circ C$   | 60                 | A          |
| $I_{DM}$      | $T_C = 25^\circ C$ , Pulse Width Limited by $T_{JM}$               | 120                | A          |
| $I_A$         | $T_C = 25^\circ C$   | 30                 | A          |
| $E_{AS}$      | $T_C = 25^\circ C$   | 700                | mJ         |
| $dv/dt$       | $I_S \leq I_{DM}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ C$ | 20                 | V/ns       |
| $P_D$         | $T_C = 25^\circ C$   | 320                | W          |
| $T_J$         |  | -55 ... +150       | $^\circ C$ |
| $T_{JM}$      |  | 150                | $^\circ C$ |
| $T_{stg}$     |  | -55 ... +150       | $^\circ C$ |
| $T_L$         | Maximum Lead Temperature for Soldering                             | 300                | $^\circ C$ |
| $T_{SOLD}$    | 1.6 mm (0.062in.) from Case for 10s                                | 260                | $^\circ C$ |
| $F_C$         | Mounting Force (TO-263)  | 10..65 / 2.2..14.6 | N/lb       |
| $M_d$         | Mounting Torque (TO-220 & TO-3P)                                   | 1.13 / 10          | Nm/lb.in   |
| <b>Weight</b> | TO-263   | 2.5                | g          |
|               | TO-220   | 3.0                | g          |
|               | TO-3P  | 5.5                | g          |


TO-263 AA (IXFA)



TO-220AB (IXFP)



TO-3P (IXFQ)


 G = Gate      D = Drain  
S = Source    Tab = Drain

**Features**

- International Standard Packages
- Low  $R_{DS(ON)}$  and  $Q_G$
- Avalanche Rated
- Low Package Inductance

**Advantages**

- High Power Density
- Easy to Mount
- Space Savings

**Applications**

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

| Symbol       | Test Conditions<br>( $T_J = 25^\circ C$ , Unless Otherwise Specified) | Characteristic Values |      |                          |
|--------------|---|-----------------------|------|--------------------------|
|              |   | Min.                  | Typ. | Max.                     |
| $BV_{DSS}$   | $V_{GS} = 0V$ , $I_D = 250\mu A$                                      | 250                   |      | V                        |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 1.5mA$                                     | 2.5                   |      | 4.5 V                    |
| $I_{GSS}$    | $V_{GS} = \pm 20V$ , $V_{DS} = 0V$                                    |                       |      | $\pm 100$ nA             |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$ , $V_{GS} = 0V$<br>$T_J = 125^\circ C$             |                       |      | 5 $\mu A$<br>500 $\mu A$ |
| $R_{DS(on)}$ | $V_{GS} = 10V$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1                   | 19                    | 23   | m $\Omega$               |

| Symbol                              | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)  | Characteristic Values |      |                         |
|-------------------------------------|--|-----------------------|------|-------------------------|
|                                     |  | Min.                  | Typ. | Max                     |
| $g_{fs}$                            | $V_{DS} = 10\text{V}$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1   | 30                    | 50   | S                       |
| $R_{Gi}$                            | Gate Input Resistance  |                       | 1.9  | $\Omega$                |
| $C_{iss}$                           | } $V_{GS} = 0\text{V}$ , $V_{DS} = 25\text{V}$ , $f = 1\text{MHz}$   |                       | 3610 | pF                      |
| $C_{oss}$                           |  |                       | 645  | pF                      |
| $C_{rss}$                           |  |                       | 2    | pF                      |
| <b>Effective Output Capacitance</b> |  |                       |      |                         |
| $C_{o(er)}$                         | Energy related } $V_{GS} = 0\text{V}$  |                       | 260  | pF                      |
| $C_{o(tr)}$                         | Time related } $V_{DS} = 0.8 \cdot V_{DSS}$  |                       | 955  | pF                      |
| $t_{d(on)}$                         | } <b>Resistive Switching Times</b><br>$V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$<br>$R_G = 5\Omega$ (External) |                       | 18   | ns                      |
| $t_r$                               |  |                       | 10   | ns                      |
| $t_{d(off)}$                        |  |                       | 62   | ns                      |
| $t_f$                               |  |                       | 7    | ns                      |
| $Q_{g(on)}$                         | } $V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$   |                       | 50   | nC                      |
| $Q_{gs}$                            |  |                       | 15   | nC                      |
| $Q_{gd}$                            |  |                       | 17   | nC                      |
| $R_{thJC}$                          |  |                       |      | 0.39 $^\circ\text{C/W}$ |
| $R_{thCS}$                          | TO-220   |                       | 0.50 | $^\circ\text{C/W}$      |
|                                     | TO-3P  |                       | 0.21 | $^\circ\text{C/W}$      |

### Source-Drain Diode

| Symbol   | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)      | Characteristic Values |      |       |
|----------|--|-----------------------|------|-------|
|          |  | Min.                  | Typ. | Max   |
| $I_S$    | $V_{GS} = 0\text{V}$   |                       |      | 60 A  |
| $I_{SM}$ | Repetitive, pulse Width Limited by $T_{JM}$                                      |                       |      | 240 A |
| $V_{SD}$ | $I_F = I_S$ , $V_{GS} = 0\text{V}$ , Note 1                                      |                       |      | 1.4 V |
| $t_{rr}$ | } $I_F = 30\text{A}$ , $-di/dt = 100\text{A}/\mu\text{s}$<br>$V_R = 100\text{V}$ |                       | 95   | ns    |
| $Q_{RM}$ |  |                       | 380  | nC    |
| $I_{RM}$ |  |                       | 8    | A     |

Note 1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .

### PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

|  |           |           |           |           |             |             |             |             |             |             |
|--|-----------|-----------|-----------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|
| IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: | 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665   | 6,404,065B1 | 6,683,344   | 6,727,585   | 7,005,734B2 | 7,157,338B2 |
|  | 4,860,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123B1 | 6,534,343   | 6,710,405B2 | 6,759,692   | 7,063,975B2 |             |
|  | 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728B1 | 6,583,505   | 6,710,463   | 6,771,478B2 | 7,071,537   |             |

Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$

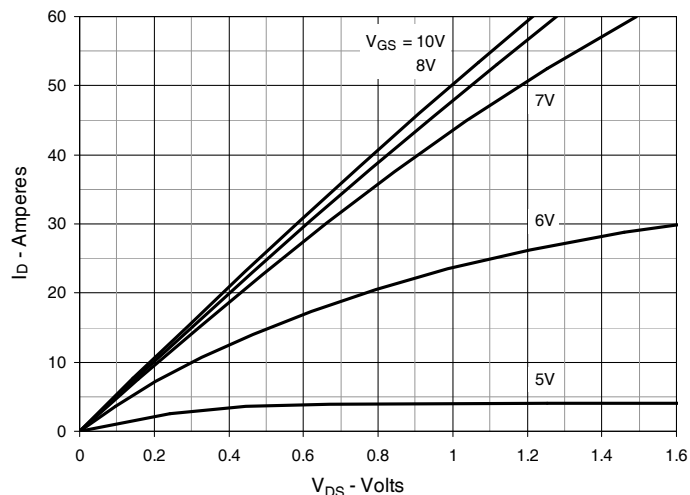


Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$

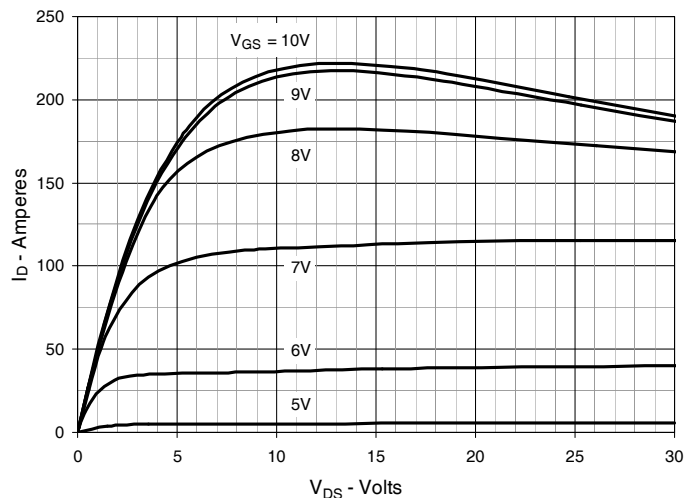


Fig. 3. Output Characteristics @  $T_J = 125^\circ\text{C}$

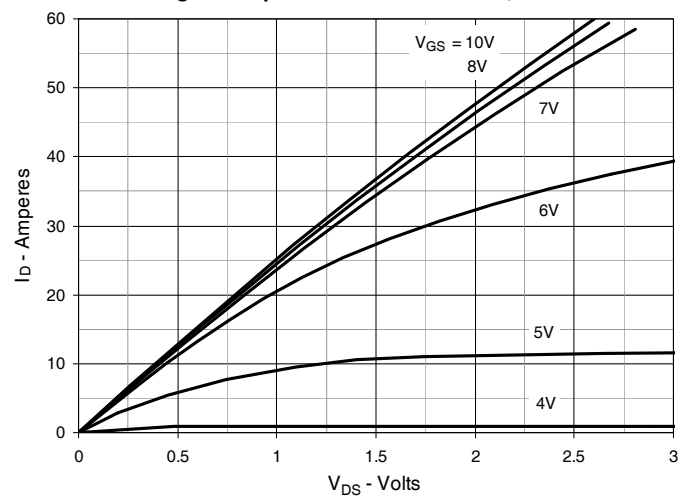


Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 30\text{A}$  Value vs. Junction Temperature

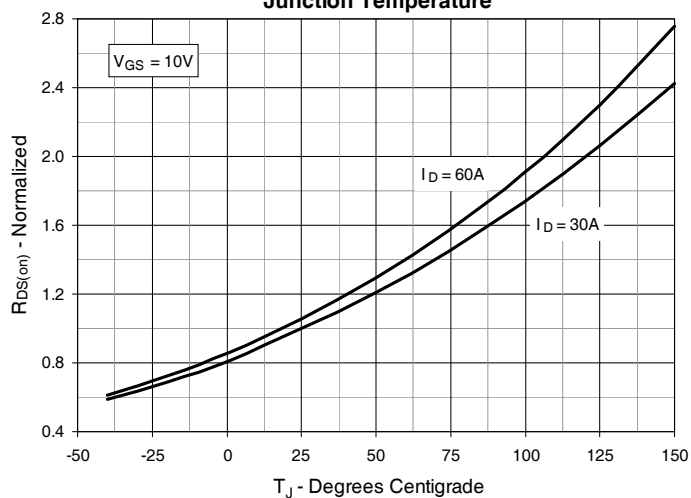


Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 30\text{A}$  Value vs. Drain Current

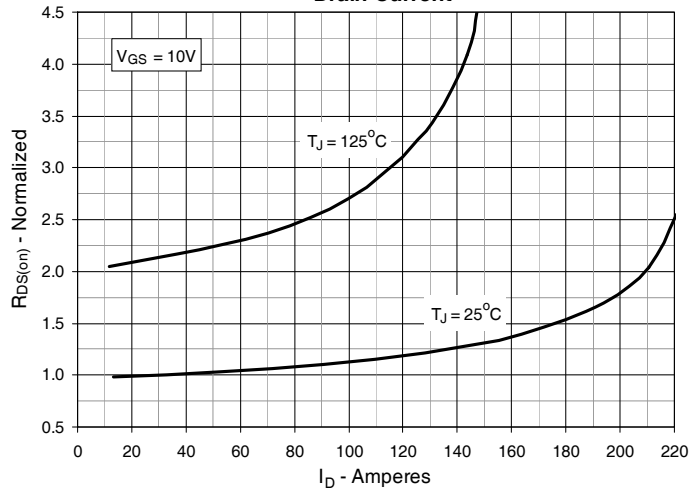


Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature

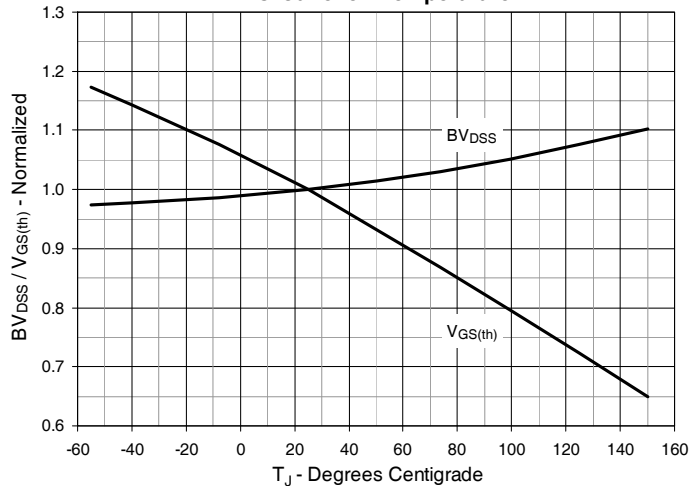


Fig. 7. Maximum Drain Current vs. Case Temperature

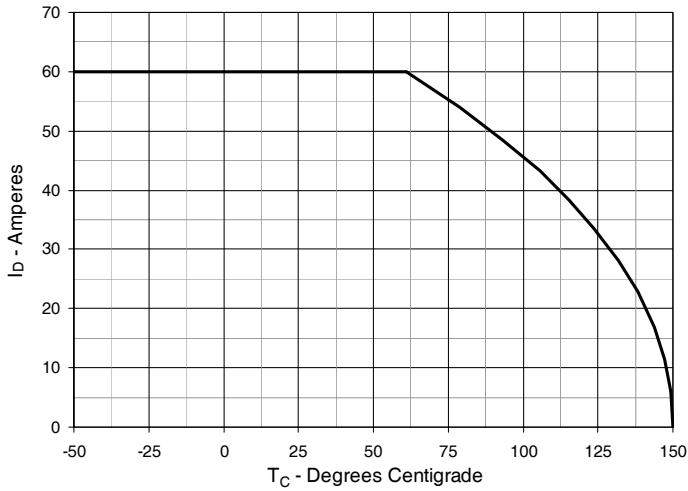


Fig. 8. Input Admittance

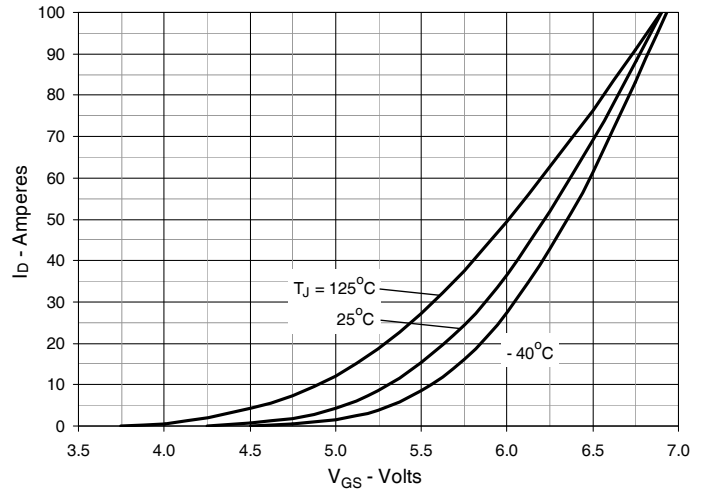


Fig. 9. Transconductance

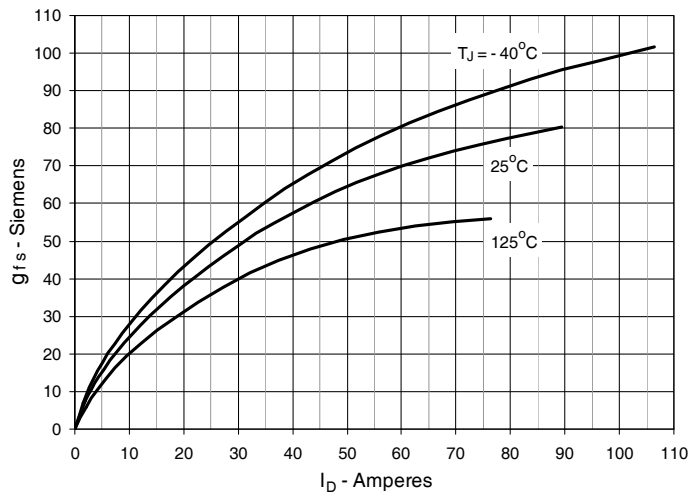


Fig. 10. Forward Voltage Drop of Intrinsic Diode

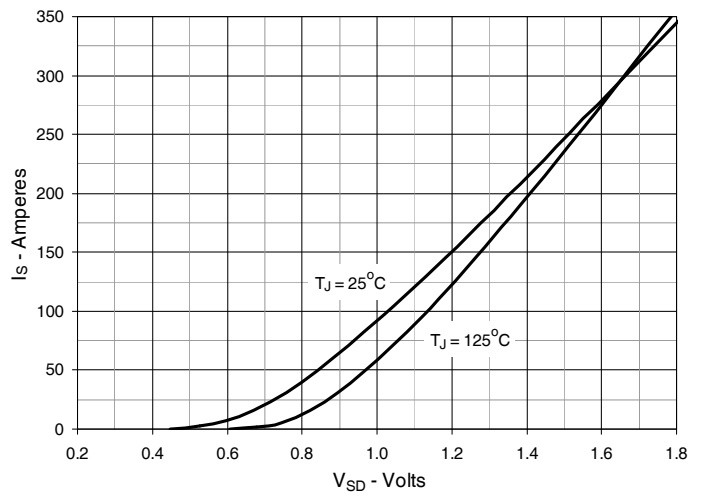


Fig. 11. Gate Charge

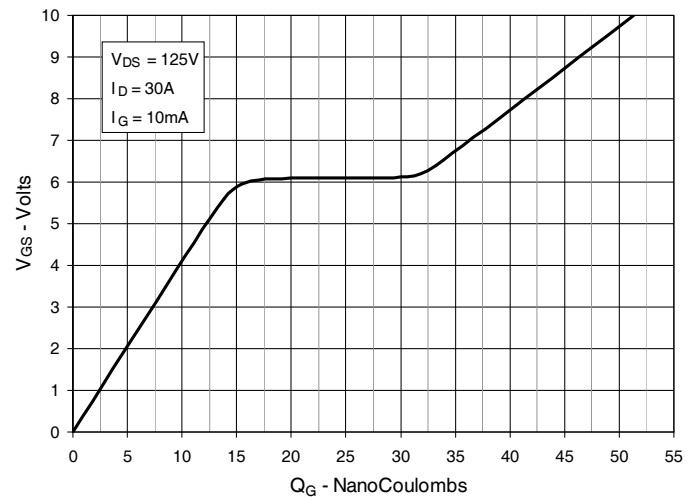


Fig. 12. Capacitance

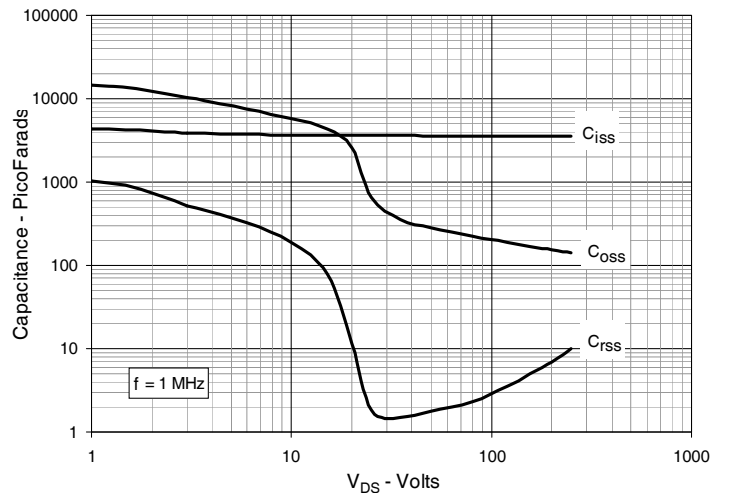


Fig. 13. Output Capacitance Stored Energy

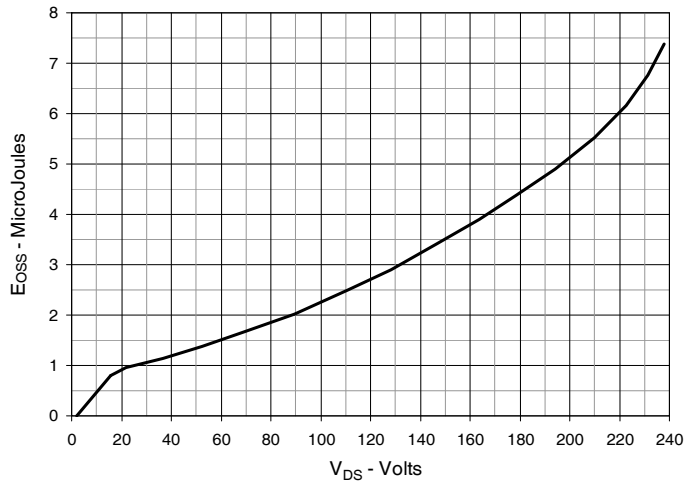


Fig. 14. Forward-Bias Safe Operating Area



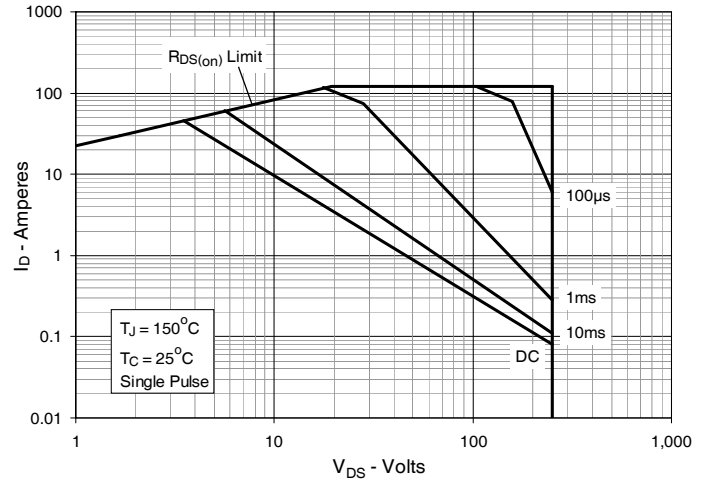



Fig. 15. Maximum Transient Thermal Impedance

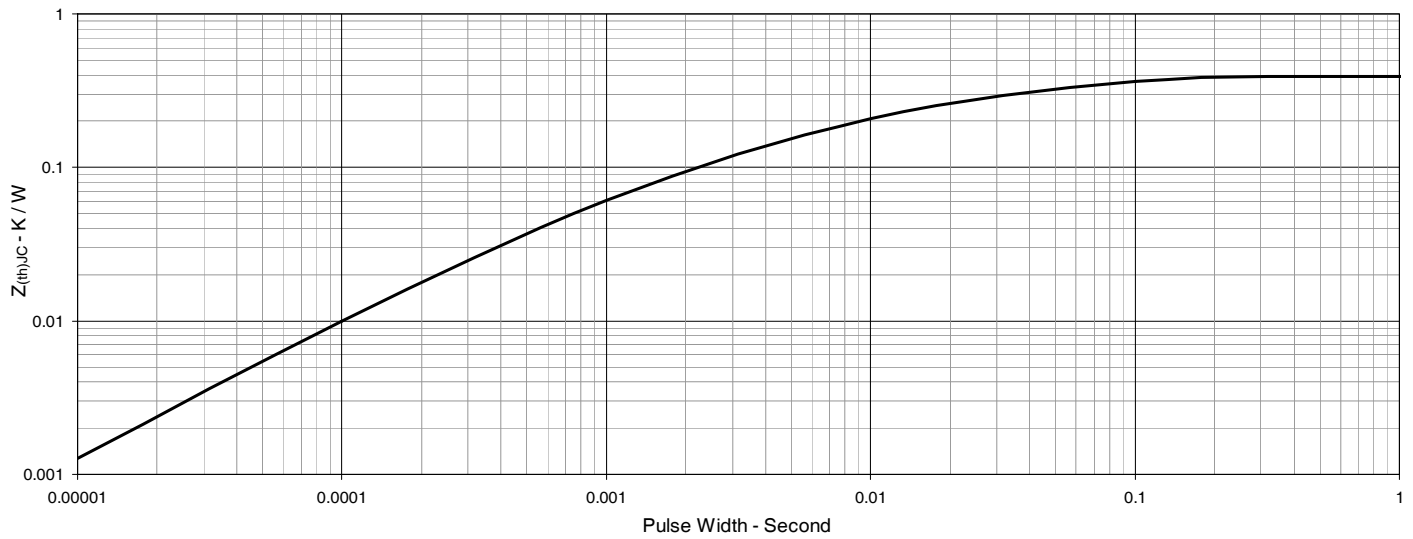

### TO-263 Outline

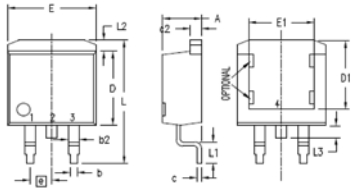


- 1 = Gate
- 2 = Drain
- 3 = Source
- 4 = Drain



| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .160     | .190 | 4.06        | 4.83  |
| A1  | .080     | .110 | 2.03        | 2.79  |
| b   | .020     | .039 | 0.51        | 0.99  |
| b2  | .045     | .055 | 1.14        | 1.40  |
| c   | .016     | .029 | 0.40        | 0.74  |
| c2  | .045     | .055 | 1.14        | 1.40  |
| D   | .340     | .380 | 8.64        | 9.65  |
| D1  | .315     | .350 | 8.00        | 8.89  |
| E   | .380     | .410 | 9.65        | 10.41 |
| E1  | .245     | .320 | 6.22        | 8.13  |
| e   | .100 BSC |      | 2.54 BSC    |       |
| L   | .575     | .625 | 14.61       | 15.88 |
| L1  | .090     | .110 | 2.29        | 2.79  |
| L2  | .040     | .055 | 1.02        | 1.40  |
| L3  | .050     | .070 | 1.27        | 1.78  |
| L4  | 0        | .005 | 0           | 0.13  |


### TO-220 Outline



- Pins: 1 - Gate
- 2 - Drain
- 3 - Source

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .170     | .190 | 4.32        | 4.83  |
| b   | .025     | .040 | 0.64        | 1.02  |
| b1  | .045     | .065 | 1.15        | 1.65  |
| c   | .014     | .022 | 0.35        | 0.56  |
| D   | .580     | .630 | 14.73       | 16.00 |
| E   | .390     | .420 | 9.91        | 10.66 |
| e   | .100 BSC |      | 2.54 BSC    |       |
| F   | .045     | .055 | 1.14        | 1.40  |
| H1  | .230     | .270 | 5.85        | 6.85  |
| J1  | .090     | .110 | 2.29        | 2.79  |
| k   | 0        | .015 | 0           | 0.38  |
| L   | .500     | .550 | 12.70       | 13.97 |
| L1  | .110     | .230 | 2.79        | 5.84  |
| ØP  | .139     | .161 | 3.53        | 4.08  |
| Q   | .100     | .125 | 2.54        | 3.18  |

### TO-3P Outline

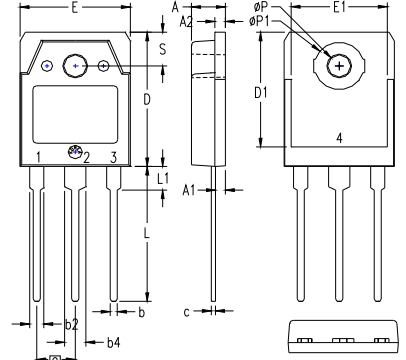

- Pins: 1 - Gate
- 2 - Drain
- 3 - Source
- 4 - Drain

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .185     | .193 | 4.70        | 4.90  |
| A1  | .051     | .059 | 1.30        | 1.50  |
| A2  | .057     | .065 | 1.45        | 1.65  |
| b   | .035     | .045 | 0.90        | 1.15  |
| b2  | .075     | .087 | 1.90        | 2.20  |
| b4  | .114     | .126 | 2.90        | 3.20  |
| c   | .022     | .031 | 0.55        | 0.80  |
| D   | .780     | .791 | 19.80       | 20.10 |
| D1  | .665     | .677 | 16.90       | 17.20 |
| E   | .610     | .622 | 15.50       | 15.80 |
| E1  | .531     | .539 | 13.50       | 13.70 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .779     | .795 | 19.80       | 20.20 |
| L1  | .134     | .142 | 3.40        | 3.60  |
| ØP  | .126     | .134 | 3.20        | 3.40  |
| ØP1 | .272     | .280 | 6.90        | 7.10  |
| S   | .193     | .201 | 4.90        | 5.10  |

All metal area are tin plated.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[IXFP60N25X3M](#) [IXFA60N25X3](#) [IXFQ60N25X3](#) [IXFP60N25X3](#)