Order-No.	Shell Size / for No. of Contacts	A ±0.3	B ±0.1	C ±0.3	D ±0.3	E ±0.3	øF min - max	G ±0.3	H ±0.3	J ±0.3	K ±0.3	L ±0.3	M ±0.3	N ±0.3	P ±0.3	R ±0.3
FKI1A-4488	1 / 9	11.5	25	36	36	16	3.5 - 7.5	22	-	12.4	17.2	-	20.4	15.7	12.8	11.9
FKI2A-4488	2 / 15	11.5	33.3	44.3	42	16	6.5 - 9	27.3	13.7	12.4	22	24.6	28	19.9	17	16.1
FKI3A-4488	3 / 25	11.5	47	58	42	16	6.5 - 11	41	15	12.4	35.6	38.8	42	19.5	17	15.7
FKI4A-4488	4 / 37	11.5	63.5	74.5	42	16	6.5 - 11	57.5	15.4	12.4	52.3	55.3	58.5	19.4	17	15.6
FKI5A-4488	5 / 50	14.2	61.1	73	42	19	9 - 13	55	16.5	19.3	49.8	53.4	65.8	17.4	19	13.9

øF = Cable diameter

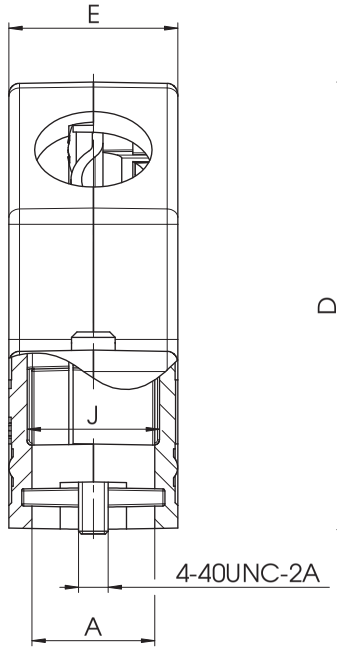

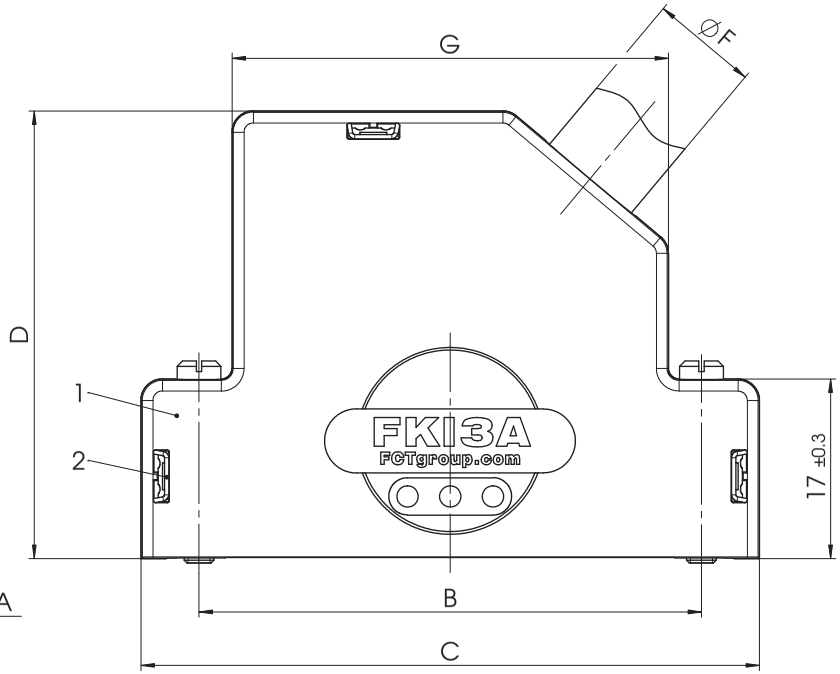

view of the hoods without lid

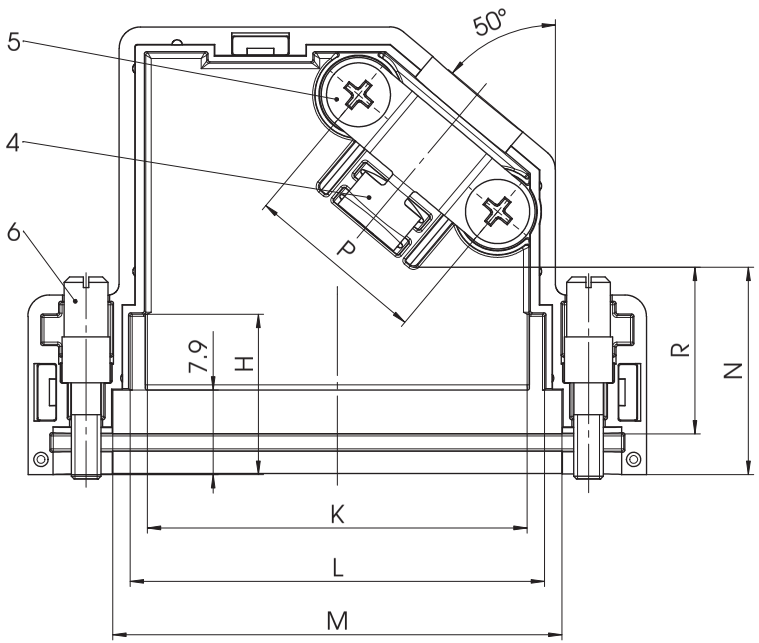



reverse side
1 : 1

Packing unit on supplement AM0409

max. torque are 40 Ncm
Hood is snapped together
Part-No. 4, 5 and 6 not mounted

RoHS compliant

No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
6	2	Locking screw	FVS1/5-4368 4-40 / Brass	nickel plated
5	2	Cable clamp screw	Steel	nickel plated
4	1	Cable clamp	Steel	tin plated
3	2	Locking nut	Brass	tin plated
2	3	Locking element sheet	Spring steel	blank
1	1	Hood	FKI1-5A / Polyester	nickel plated

Measurement without tolerance acc. to ISO 2768-m
SCALE 2:1

TITLE: Plastic hood

	NAME / DATE
DRAWN	Anke.Meyer-Richter 04-11-2011
CHECKED	BWittek 04-11-2011

FCT group fctgroup.com

DWG.NO. FKI1-5A-4488

REV. 1

REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE	REPLACEMENT FOR:	PAGES 1
1					

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.