

- Very compact metal cased power supplies
- High operating temperature up to 70°C
- Low no load power consumption <1.0W
- Screw terminal block
- No internal fan
- Universal AC input
- Withstand 300 VAC surge input for 5 sec.
- Adjustable output voltage
- 3-year product warranty



The TXM 035 series of 35 Watt is a family of enclosed AC/DC power supplies designed for cost critical applications. With a low profile metal case and screw terminal block connections, they are easy to install in any equipment. There are five models of single output voltages from 5 VDC to 48 VDC. These power supplies have universal input and comply with European EMC standards and the Low Voltage Directive (LVD).

Models				
Order Code	Output Power (max.)	Output Voltage (adjustable)	Output Current (max.)	Efficiency (typ.)
TXM 035-105	35 Watt	5 VDC	6.0 A	80 %
TXM 035-112		12 VDC	3.0 A	84 %
TXM 035-115		15 VDC	2.4 A	86 %
TXM 035-124		24 VDC	1.5 A	87 %
TXM 035-148		48 VDC	0.75 A	88 %

Input Specifications

Input voltage range	– AC range (universal input) – DC range	90 – 264 VAC (47 – 63 Hz) 127 – 370 VDC
Input current at full load		1 A max.
Surge voltage (5 s max.)		300 VAC
Inrush current	– at 230 VAC	50 A typ.
Leakage current	– Input to Output – Input to PE	0.25 mA max. 3.50 mA max.

Output Specifications

Voltage set accuracy		±3 % max.
Voltage adjustment range		–5 % to +10 %
Regulation	– Input variation (Vin min. to Vin max.) – Load variation (0 - 100%)	0.5 % max. 1.0 % max.
Minimum load		not required
Temperature coefficient		±0.03 %/K max.
Hold-up time	– at 115 VAC – at 230 VAC	10 ms min. 20 ms min.
Start-up time	– at 230 VAC	1 s max.
Startup overshoot voltage		5 % max.
Ripple and noise (20 MHz Bandwidth)	5 Vout model: 12 Vout model: 15 & 24 Vout model: 48 Vout model:	50 mVp-p max. (w. cap. 0.1µF // 10µF) 80 mVp-p max. (w. cap. 0.1µF // 10µF) 120 mVp-p max. (w. cap. 0.1µF // 10µF) 180 mVp-p max. (w. cap. 0.1µF // 10µF)
Output current limitation		105 – 150 % of Iout max.
Short circuit protection		continuous, automatic recovery (hiccup mode)
Over voltage protection		105 – 150 % of Vout max. (constant voltage)


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications

Temperature ranges	<ul style="list-style-type: none"> – Operating – Storage 	–25°C to +70°C (with derating) –40°C to +85°C
Humidity (non condensing)	<ul style="list-style-type: none"> – Operating – Storage 	20 – 90 % rel. H 10 – 95 % rel. H
Derating		2.0 %/K above 50°C
Altitude during operation		5000 m max.
Isolation voltage	<ul style="list-style-type: none"> – Input to output (60 s) – Input to case (60 s) – Output to case (60 s) 	3000 VAC 1500VAC 500 VAC
Isolation resistance		100 MOhm min.
Reliability	– Calculated MTBF at +25°C acc. to MIL-HDBK-217F	200'000 h
Protection class		class I
EMC emissions	<ul style="list-style-type: none"> – Conducted and radiated input emission – Flicker 	EN 55032, class B EN 61000-3-3
EMC immunity	<ul style="list-style-type: none"> – Electrostatic discharge (ESD) – Radiated immunity – Fast transiente – Surge – Conducted immunity – Magnetic field immunity – Voltage dips and interruptions 	EN 55024 EN 61000-4-2, ±4 kV air, ±8 kV contact perf. criteria A EN 61000-4-3, 3 V/m perf. criteria A EN 61000-4-4, ±1 kV perf. criteria A EN 61000-4-5, ±1 kV line to line, ±2kV line to ground, perf. criteria B EN 61000-4-6, 3 Vrms perf. criteria A EN 61000-4-8, 1 A/m perf. criteria A EN 61000-4-11 >95%, 0.5 cycle perf. criteria A 30%, 25 cycle perf. criteria A >95%, 250 cycle perf. criteria C
Safety standards and certification	<ul style="list-style-type: none"> – Certification documents 	IEC/EN/UL 60950-1 www.tracopower.com/overview/txm035
Environmental compliance	<ul style="list-style-type: none"> – Reach – RoHS 	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU
Connection		Screw terminal

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Dimension

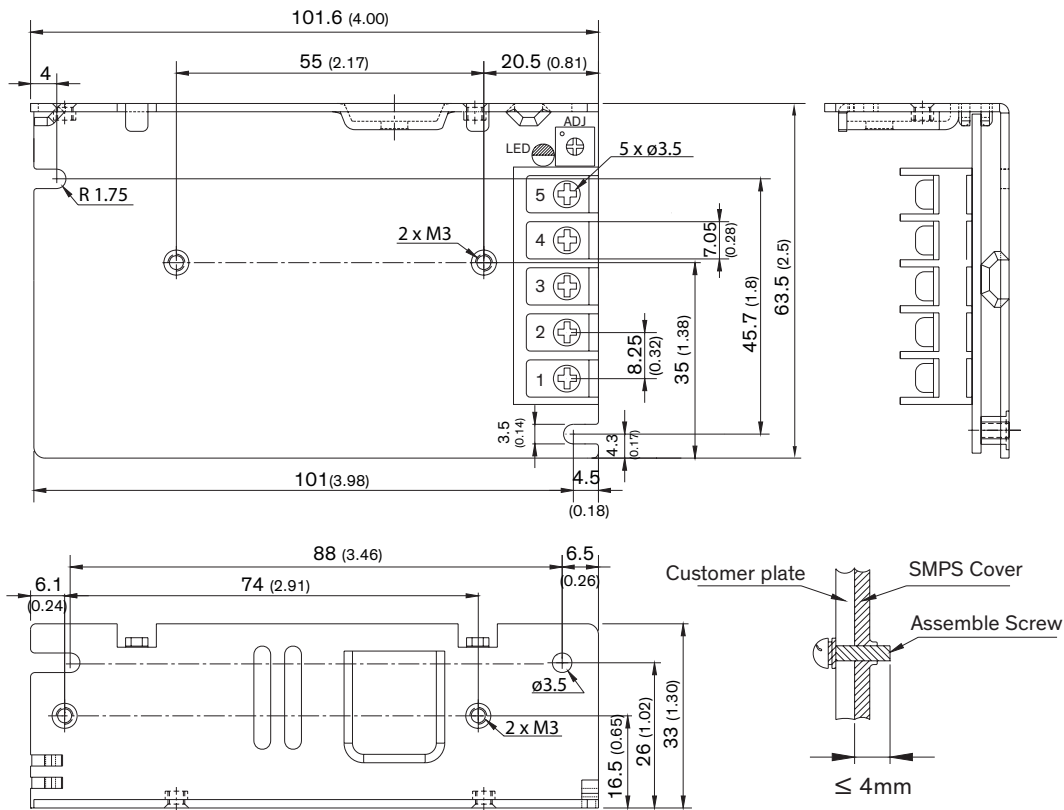

Pin-Out	
Pin	Function
1	AC (L)
2	AC (N)
3	PE
4	- Vout
5	+ Vout

Weight: 200 g (7.05 oz)

Dimensions in mm, () = inch
Outside dimension tolerance: ± 1.0 mm

Max mounting screw penetration: 2.0 mm (0.08)