
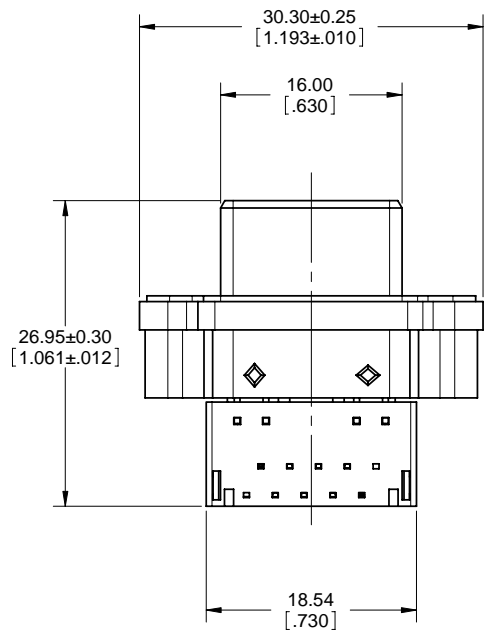
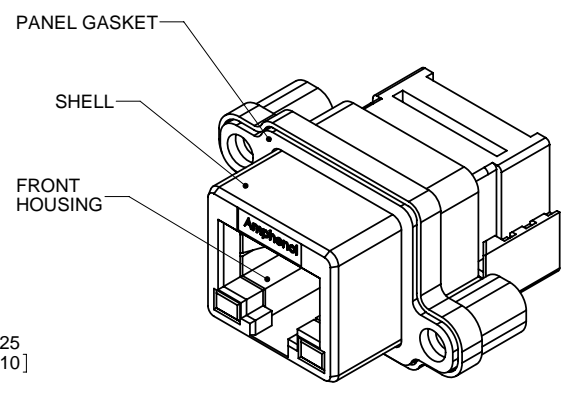
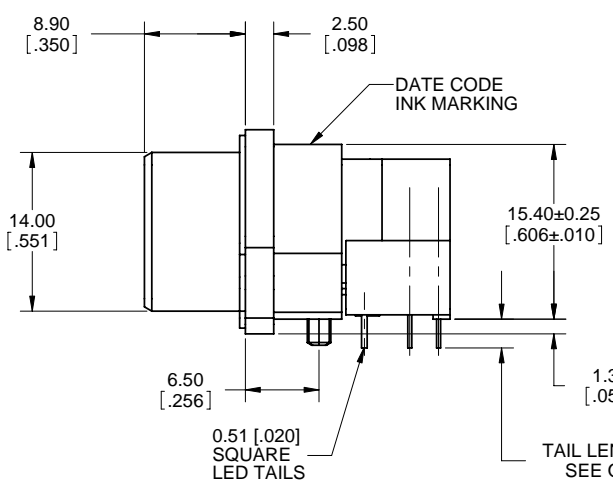


REVISIONS			
REV	DESCRIPTION	DATE	APPRD
K	PRODUCT DRAWING (EAR 13638)	DEC09/09	K.L.

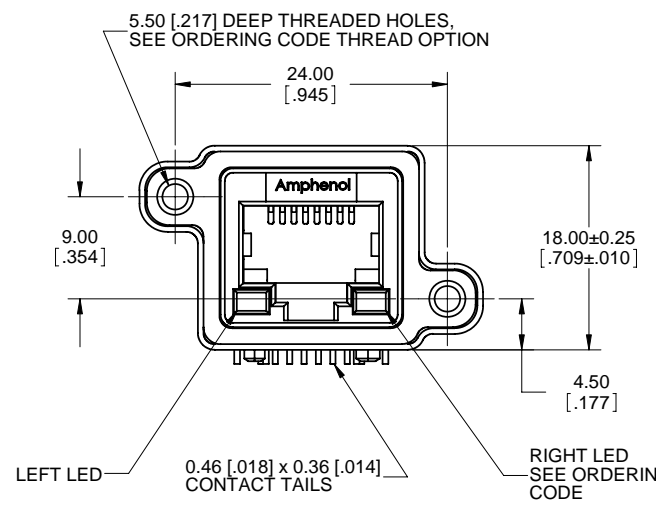

**ORDERING CODE: MRJ-53XX-X1**

SERIES, RUGGED RJ  
 RECEPTACLE, RIGHT ANGLE, PCB TAIL  
 NUMBER OF CONTACTS  
 8= 8 CONTACTS  
 A=10 CONTACTS  
 LED OPTION  
 0=NONE  
 1=GREEN LEFT, YELLOW RIGHT  
 4=YELLOW LEFT, GREEN RIGHT  
 5=GREEN LEFT, GREEN RIGHT  
 A=BI-COLOUR GREEN/YELLOW LEFT  
 BI-COLOUR GREEN/YELLOW RIGHT  
 D=GREEN LEFT  
 BI-COLOUR GREEN/YELLOW RIGHT  
 E=YELLOW LEFT  
 BI-COLOUR GREEN/YELLOW RIGHT  
 TAIL LENGTH AND MOUNTING HOLE THREAD OPTION  
 0= TAIL LENGTH A=2.54 [0.100], #4-40 UNC THREAD  
 B= TAIL LENGTH A=3.81 [0.150], #4-40 UNC THREAD  
 M= TAIL LENGTH A=2.54 [0.100], M3 x 0.5 THREAD  
 P= TAIL LENGTH A=3.81 [0.150], M3 x 0.5 THREAD  
 SINGLE PORT

**NOTES:**

- MATERIAL:**  
 ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2002/95/EC AND AMENDMENTS
  - SHELL - DIECAST ZINC, NICKEL PLATED
  - CONTACTS - PHOSPHOR BRONZE WITH 50 MICROINCHES (1.27 MICRONS) GOLD OVER 50 MICROINCHES (1.27 MICRONS) MINIMUM NICKEL ON THE MATING AREA AND MATTE TIN OVER NICKEL ON THE CONTACT TAILS.
  - INSERTS - ENGINEERING THERMOPLASTIC, UL FLAMMABILITY RATING 94V-0, REAR INSERTS: BLACK NYLON, FRONT INSERT: CLEAR POLYCARBONATE
  - LED'S - EPOXY LENS, STEEL TAILS WITH TIN PLATING
  - GASKET - SILICONE RUBBER
- ENVIRONMENTAL PERFORMANCE PER IEC 60529 CODE IP67 FOR SEAL BETWEEN MATING AREA AND PCB SIDE OF CONNECTOR. GASKET PROVIDES SEAL TO INSIDE FACE OF PANEL.**
- CURRENT RATING: 1.5 AMPERES**
- CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM**
- OPERATING TEMPERATURE: -40°C TO +105°C**
- LED CHARACTERISTICS: FORWARD DC CURRENT 25 mA MAX., FORWARD VOLTAGE 2.5 V MAX @ 2 mA**
- AVAILABLE MATING AREA COVERS PROVIDE ADDED PROTECTION. CONSULT WITH AMPHENOL CANADA FOR DETAILS.**
- CUSTOMER TO VERIFY THAT ALL PROCESS CLEANERS ARE COMPATIBLE WITH POLYCARBONATE MATERIAL.**




UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE		<b>Amphenol Canada Corp.</b>	
DECIMALS .XX ± 0.15 .X ±	ANGLES ±	DRAWN S.SEMENOV	NOV11/04	DESIGNED S.SEMENOV	NOV11/04		
MATERIAL AND FINISH	CHECKED	QA APPD	IE APPD	SIZE C	DWG. NO. P-MRJ-53XX-X1	REV. K	
REF.	DWG APPD A.GREEN	NOV11/04	SCALE 3:1	PROJECT ----	SHEET 1 OF 2		


DO NOT SCALE DRAWING  
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS			
REV	DESCRIPTION	DATE	APPRD
K	PRODUCT DRAWING (EAR 13638)	DEC09/09	K.L.


**RECOMMENDED P.C.B. LAYOUT**  
(COMPONENT SIDE OF BOARD)

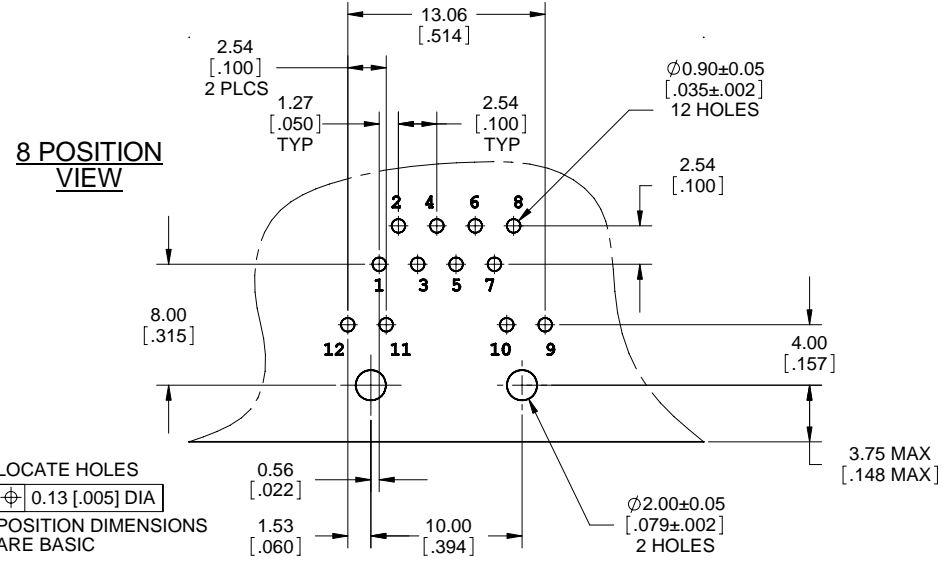

LOCATE HOLES  
 $\text{⌀} 0.13 \text{ [.005] DIA}$   
 POSITION DIMENSIONS  
 ARE BASIC




**8 POSITION LED SCHEMATIC**  
(GREEN OR YELLOW)


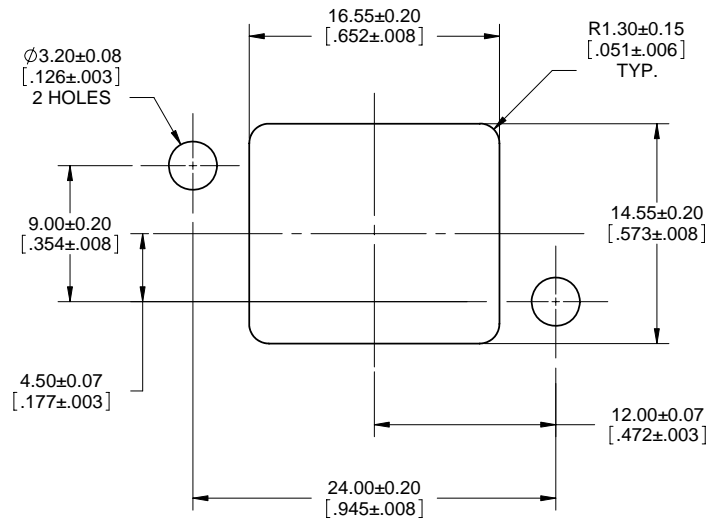


**RECOMMENDED PANEL CUTOUT**  
(FRONT OF PANEL)

**10 POSITION VIEW**

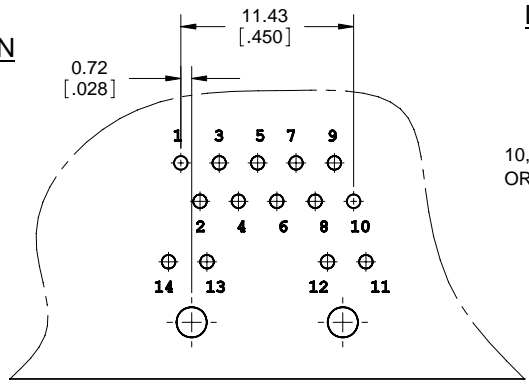

**BI-COLOUR LED SCHEMATIC**  
(LEFT OR RIGHT SIDE, 8 OR 10 POSITION)



**10 POSITION LED SCHEMATIC**  
(GREEN OR YELLOW)



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE		<b>Amphenol Canada Corp.</b>	
DECIMALS .XX ± 0.15 .X ±		DRAWN S.SEMENOV		NOV11/04			
MATERIAL AND FINISH		DESIGNED S.SEMENOV		NOV11/04		SIZE C	
REF.		CHECKED		QA APPD		DWG. NO. P-MRJ-53XX-X1	
CODE IDENT. NO.		IE APPD		SCALE 3:1		REV. K	
		DWG APPD A.GREEN		NOV11/04		PROJECT ----	
						SHEET 2 OF 2	

DO NOT SCALE DRAWING  
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE  
 OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.