

# 686AVG035MFF

RADIAL LEAD ALUMINUM POLYMER CAPACITORS

Parts are RoHS compliant

## ELECTRICAL SPECIFICATIONS

Capacitance: 68  $\mu$ F

Dissipation Factor: 0.12 Max at 120 Hz and 20°C

Temperature Range: -55°C to +125°C

ESR: 2.9256 Ohms Max at 20°C and 120 Hz

Impedance: 30 milliohm Max at 20°C and 100 KHz

Tolerance: -20 %, +20 %

WVDC: 35 Volts DC

SVDC: 40.25 Volts DC

Ripple Current: 2600 mA at 100 kHz and 105°C

1040mA at 100 kHz and 125°C

Impedance Ratios: -25°C/20°C  $\leq$  1.15 and -55°C/20°C  $\leq$  1.25

Leakage Current: 0.2CV

476  $\mu$ A after 2 Minutes

Load Life: 1500 hours at 125°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change:  $\leq$ 30% of initial measured value

Dissipation Factor Change:  $\leq$ 300% of maximum specified value

ESR Change:  $\leq$ 300%

Leakage Current:  $\leq$ 100% of maximum specified value

### Ripple Current Multipliers

#### Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.05	0.05	0.05	0.3	0.7	1

#### Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
1.9	1.9	1.9	1.9	1.75	1.75	1.4	1

## PHYSICAL DIMENSIONS

Diameter (D): 8 mm + 0.5 mm

Length (L): 8 mm + 1.5 mm


Lead Spacing (S): 3.5 mm +/- 0.5 mm

Coating: clearlaminat sleeveing

Lead Wire Diameter (d): 0.6 mm +/- 0.05 mm

Lead Length: 15 mm +/- Min mm

Lead Finish: Matte Tin

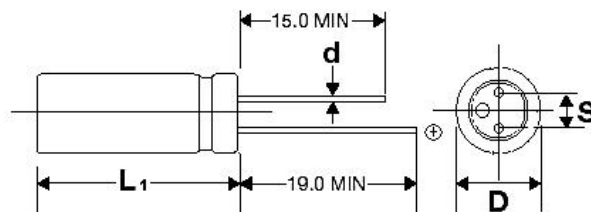

2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.illcap.com.hk](http://www.illcap.com.hk)

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved