



Part Number : [39532045](#)


Product Description : 1.25mm Pitch Easy-On FFC/FPC Connector, Through-Hole, Vertical, ZIF, 4 Circuits

Series Number : 5597

Status : Active

Product Category : FFC / FPC Connectors

Engineering Number : 5597-04CPB7F

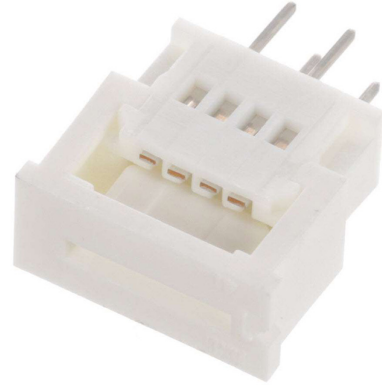

---

## Documents & Resources

### Drawings

[Drawing 039532045\\_sd.pdf](#)

### 3D Models and Design Files

[3D Model 039532045\\_stp.zip](#)

### Specifications

[Packaging Specification SPK-5597-001-001.pdf](#)

[Product Specification PS-5597-004-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS

- REACH SVHC

- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	FFC / FPC Connectors
Series	5597
Description	1.25mm Pitch Easy-On FFC/FPC Connector, Through-Hole, Vertical, ZIF, 4 Circuits
Product Family	Easy-On FFC FPC Connectors
Product Name	Easy-On
UPC	822348188895

### Agency

UL	E29179
----	--------

### Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	200V

### Physical

Actuator Type	Slider
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Contact Position	N/A
Durability (mating cycles max)	30
Flammability	94V-0

Mated Height	7.50mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin-Bismuth
Material - Plating Termination	Tin-Bismuth
Material - Resin	Polyester
Net Weight	521.960/mg
Orientation	Vertical
Packaging Type	Tray
PC Tail Length	3.50mm
PCB Locator	No
PCB Mounting	Through Hole
PCB Retention	None
Pitch - Mating Interface	1.25mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-20° to +80°C
Wire/Cable Type	FFC/FPC

---

This document was generated on Jan 21, 2024