



## Data sheet | Item number: 216-244

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

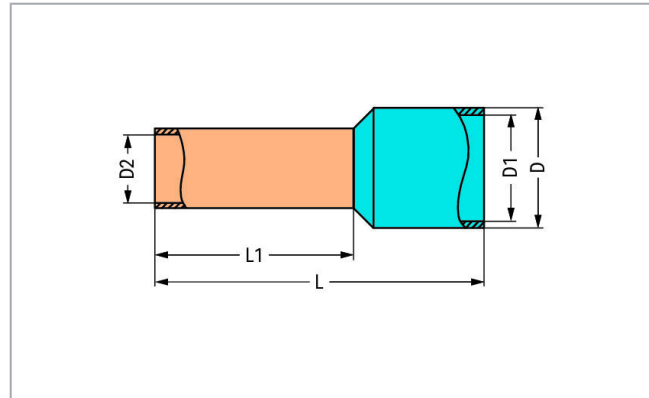

[www.wago.com/216-244](http://www.wago.com/216-244)

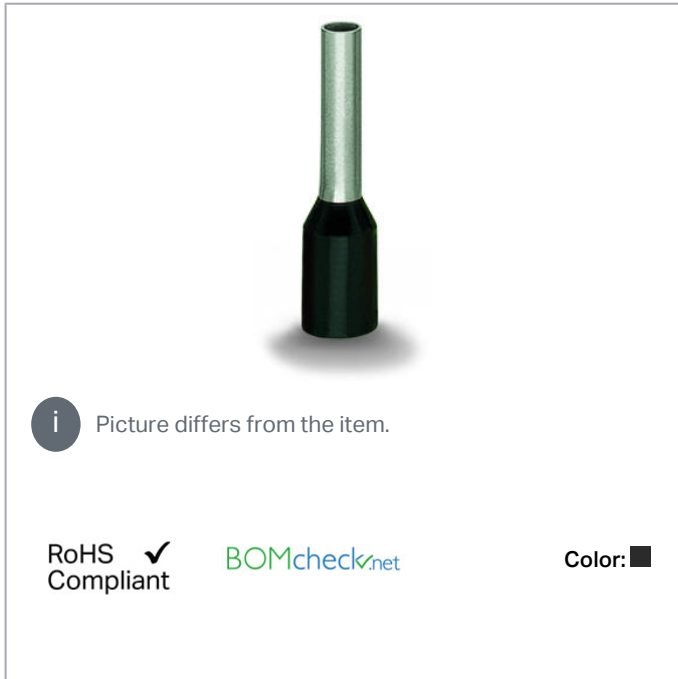

### Data

#### Technical data

Main product function	Ferrule
Sleeve cross-section (AWG)	16 AWG
Sleeve for	1.5 mm <sup>2</sup>

#### Connection data

Strip length	12 mm / 0.47 inch
--------------	-------------------

#### Physical data

Length	16 mm
Length	16 mm
Length 1	10 mm
Diameter	4 mm
Diameter 1	3.5 mm

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Diameter 2	1.7 mm
------------	--------

**Material data**

Color	black
Fire load	0.002 MJ
Weight	0.1 g

**Commercial data**

Product Group	2 (Terminal Block Accessories)
Packaging type	BOX
Country of origin	DE
GTIN	4044918016346
Customs tariff number	85369010000

**Downloads****Documentation****Bid Text**

216-244 X81 - Datei	2019 Feb 19	xml 2.9 kB	Download
216-244 doc - Datei	2017 Sep 11	doc 24.1 kB	Download

**Environmental Product Compliance****Compliance Search**


Environmental Product Compliance 216-244 Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	URL	Download
--	-----	----------

**Installation Notes**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

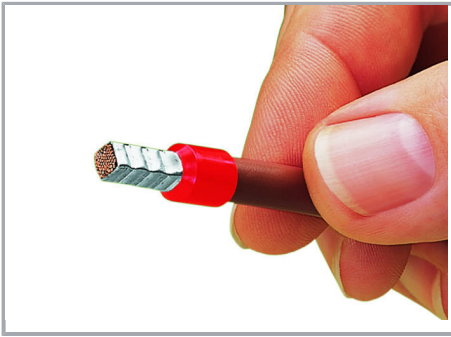

A perfect gas-tight crimp – both electrically and mechanically reliable

Subject to changes. Please also observe the further product documentation!