
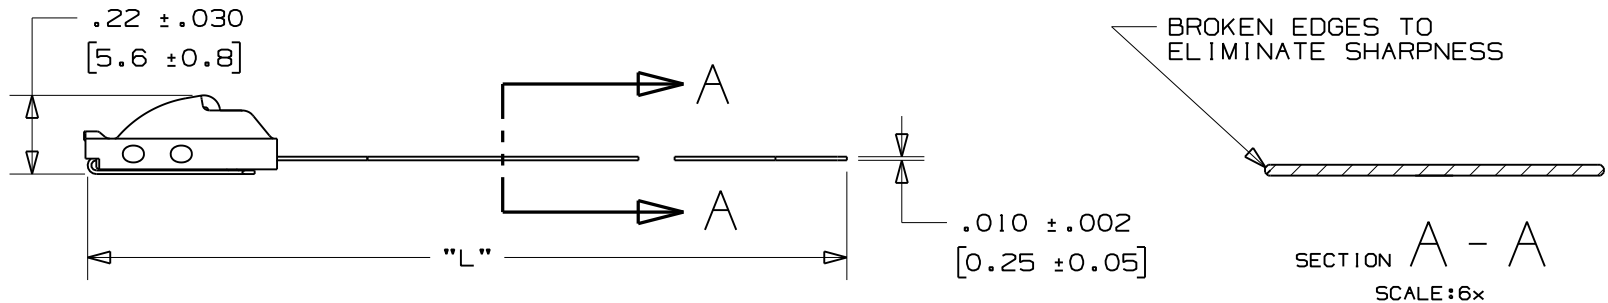


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH L ±.3 (7)
MLT1H-LPAL	50	1" (25)	5.5" (140)
MLT2H-LPAL	50	2" (51)	7.9" (201)
MLT4H-LPAL	50	4" (102)	14.3" (362)

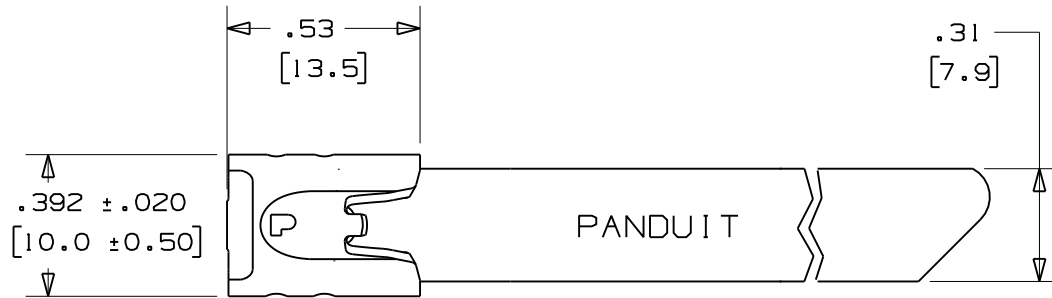

NOTES:

- (A) 1.) APPLICATION TOOLS - ST2MT, ST3MT & HTMT.
- (D) 2.) MINIMUM LOOP TENSILE STRENGTH - 50 LBS. (222 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) [] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:
 - .XXX = ±.010 (.25)
 - .XX = ±.02 (.5)
 - .X = ±.03 (.8)
 - ANGLES = ±2°
- (B) 5.) MATERIAL: ALUMINUM 5052

REV	DATE	BY	CHK	DESCRIPTION	ECN #
03	11/06	JAMB	EJD	(D) REMOVED APPLICATION TOOLS GS4MT & PPMT FROM NOTE 1	SS00280
02	1/06	JMMR	EJD	(C) ADDED PART NUMBER MLT1H-LPAL TO TABLE	SS00124
01	9/05	JAMB	EJD	(A) ADDED ALL APPLICABLE APPLICATION TOOLS TO NOTE 1 (B) MAT'L. WAS ALUMINUM 5052-H34	SS00056
00	8/05	JAMB	EJD	DRAWING RELEASED	SS00032

S41215_03

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

METAL LOCKING TIE
HEAVY SERIES - ALUMINUM
(CUSTOMER DRAWING)

DRAWN BY	CHK'D	SCALE	DRAWING NO.
JAMB	EJD	2x	S41215

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MLT2H-LPAL](#) [MLT4H-LPAL](#) [MLT1H-LPAL](#)