Model PSxxM / PSxxL

Electronics

Features:

- Molded element
- 100,000 cycle life
- Metal or plastic shaft options
- With/without LED illumination
- With/without dust cover
- **RoHS** compliant



•	
Dual Gang Without LED	PSxxM
Single Gang With LED	PSxxL
Flactrical	

Congression and Congression an	
	Electrical
Resistance Range, Ohms	500 -1M
Standard Resistance Tolerance	± 20%
Resistance Tapers	A,B,C
Residual Resistance	Terminals 1 to 2:Less than 10 ohms Terminals 2 to 3:Less than 30 ohms
Input Voltage, Maximum	Linear B taper: 200 Vac Other tapers: 150 Vac
Power rating, Watts (Single Unit / Dual Unit)	Linear B taper: 20mm: 0.1W / 0.05W, 30mm: 0.2W / 0.1W 45mm: 0.25W / 0.125W, 60mm:0.2W / 0.2W
	Other tapers: 20mm: 0.05W / 0.025W, 30mm: 0.1W / 0.05W 45mm: 0.125W / 0.06W, 60mm:0.1W / 0.1W
Dielectric Strength	300Vac, 1 minute
Insulation Resistance, Minimum	10M ohms at 250Vdc/ 1 minute
Sliding Noise	Less than 100mV
Gang Error	±3dB (-40dB to 0dB)
	Mechanical
Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	10af to 100af

Model Styles Available


Gang Error	±3dB (-40dB to 0dB)
Mechanica	I
Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	10gf to 100gf
Detent Slip-out force	30gf to 200gf
Durability	
Sliding Life	100,000 cycles

Model PSxxM / PSxxL




Ordering

Model PSxxM (Without LED)

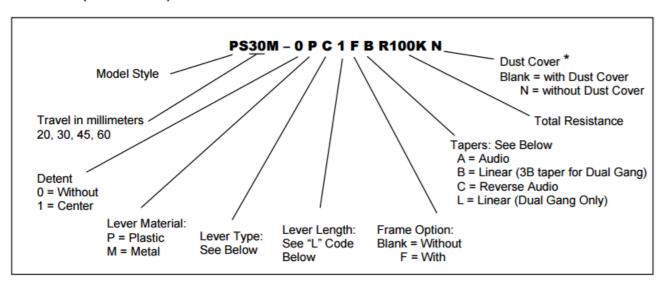

Model PSxxL (With LED)

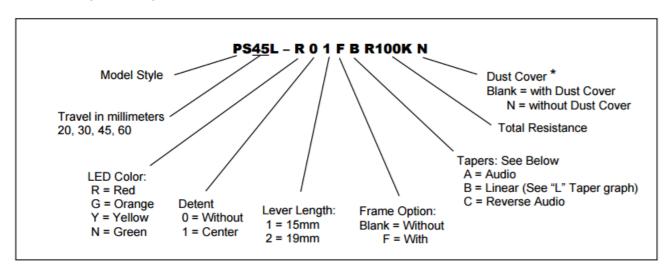



Standard Resistance Values, ohms


500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1 MEG	500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1 MEG
---	-----	----	----	----	-----	-----	-----	------	------	------	-------




Tapers
For Dual Gang units ONLY, the Standard Taper is a 3B taper
If Linear Taper is desired, use "L" taper option










Model PSxxM / PSxxL




Outline Drawings

Plastic Lever Types (For PSxxM Only)

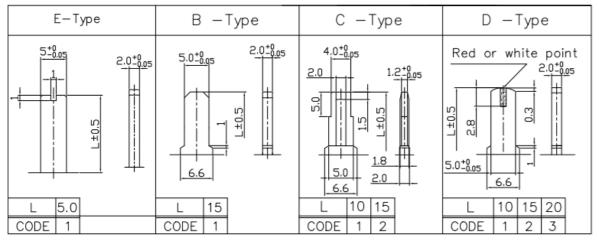

Dust Cover option not offered for levers less than 10 mm in length

Metal Lever Types (For PSxxM Only)

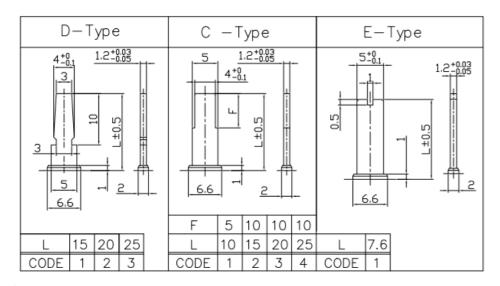

^{*} Dust Cover option not offered for levers less than 10 mm in length

Model PSxxM / PSxxL





Outline Drawings

Model PSxxM (Without LED)


With Dust Cover


A±0.5 B±0.2 2-M2X0.4






Without Dust Cover







For PSxxM and PSxxL

MODEL		Α	В	С	D	F	G
PS20M	PS20L	35	31	20	30	5	12.5
PS30M	PS30L	45	41	30	40	10	22.5
PS45M	PS45L	60	56	45	55	15	32.5
PS60M	PS60L	75	71	60	70	22.5	47.5

Model PSxxM / PSxxL




Outline Drawings

Model PSxxL (With LED)


With Dust Cover

Without Dust Cover

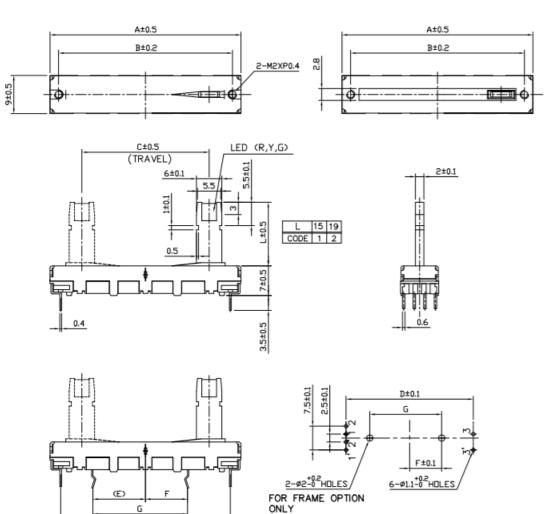


PSxxL (Single gang with LED)

FRAME OPTION (F)



PSxxM (Dual gang)



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

PS20M-020A PS45M-1PD2FLR10KN PS60M-0MC2FBR10K PS60M-0MC2BR10K PS20L-N02FBR10KN PS45L11PC3BR10K PS20M-0MC2FBR10K PS45M-0ME1BR100K PS30L-R01BR20KN PS45M-0ME1BR10K PS60M0ME1BR50K PS30M-OPC1FBR10K PS45M-0MC2LR10K PS20M-0PC1FAR250KN PS60M-0MC1BR10K PS60M0ME1BR100K PS45M-0MD2LR20K PS60M-0MC1BR50K PS45L-R01FBR100KN PS60L-N01FBR50K PS45M0MC1BR100K PS45M-1PD2FB10K PS45M-0MC1BR1MEG PS20L-R01FAR100K PS20M-0ME1FAR10KN PS60M0MC1BR500 PS45L-R01FB100K PS45L-R02AR100K PS30L-N12FBR10K PS45L-Y01BR50K PS60M-0ME1BR500K
PS20L-G01AR100K PS45M-1MD2LR10K PS45L-R02BR1K PS60M-0MC1BR5K PS20M-1MD1FBR20K PS45M1PD2FBR10KN PS20M-0PB1FAR500 PS45M-0ME1BR50K PS20M-0PB1FAR500N PS45M-0MC1BR500K PS30LR01AR500K PS45M-OPE1FBR100KN PS45M-1MD2LR20K PS60M-0MC1BR100K PS20L-R01FBR10K PS45M0PE1FBR100KN PS30L-G02FBR50KN PS20M-0PD1BR10K PS45M-0MC1BR50K PS45M0MC1BR10K PS45M-0MC1FBR10K PS20M-0MC1LR10K PS45M-0ME1BR10K PS45M0MC1BR10K PS20L-G01BR10K PS60M-0MD1AR20K PS45M-0MC1BR50K PS20M-1MC1BS0K PS60M0MC1BR10K PS20L-G01BR10K PS60M-0MD1AR20K PS45M-0MC1BR50K PS20M-1MC1BS0K PS60M0ME1BR1MEG PS45L-R01FAR50KN PS20M-0PC1FR100K PS45M-0MC1BR50K PS20M-0PC1FBR10KN
PS45L-N02BR1K PS60M-1MC2FBR20K