


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. [889 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS
AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [7]
MLT1S-CP316	1" [25]	100	5.0" [127]
MLT2S-CP316	2" [51]	100	7.9" [201]
MLT2.7S-CP316	2.7" [69]	100	10.2" [259]
MLT4S-CP316	4" [102]	100	14.3" [362]
MLT6S-CP316	6" [152]	100	20.5" [521]
MLT8S-CP316	8" [203]	100	26.8" [679]
MLT10S-CP316	10" [254]	100	33.0" [838]

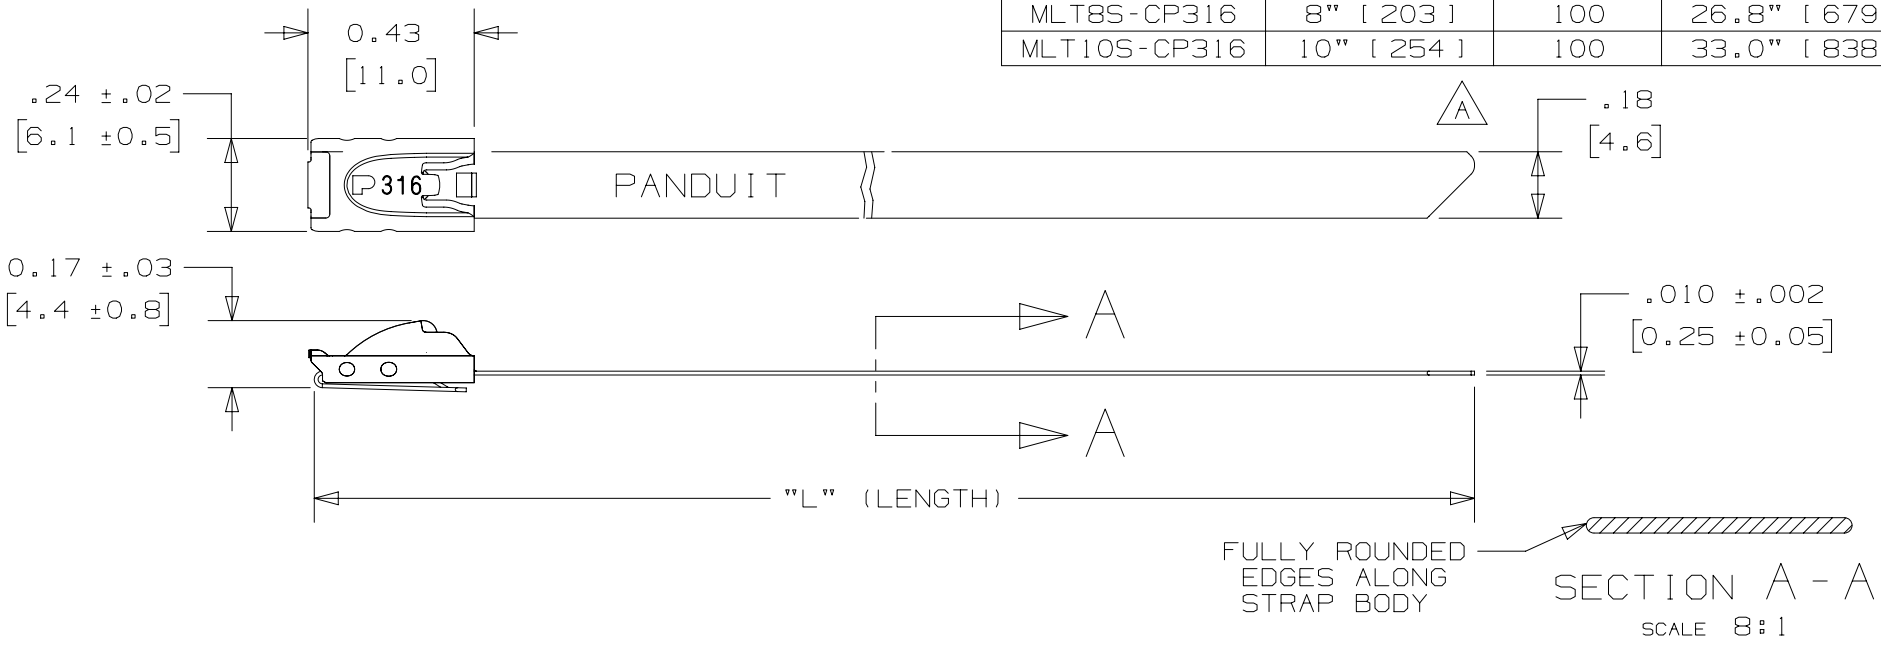

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10	10.09.15	BDK	SKB	RGRO	A. ADDED NEW TIP CONFIGURATION	N41120BS_DC
09A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
08A	2/12	MIM	RGRO	---	NOTE:#3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----

TITLE		METAL LOCKING TIE STANDARD SERIES 316 STAINLESS STEEL	
CUSTOMER DRAWING			
ITEM REVISION NAME		N41120BS/10	
DATASET FILE NAME		N41120BS_DC/010A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: 316 STAINLESS STEEL	
.x ± .1 [2.54] .xxx ± .005 [.127]		DRAWING NUMBER: N41120BS_DC	
.xx ± .01 [.25] ANGLES ± 5 °			
THIRD ANGLE PROJECTION			
DRAWN BY	DATE	CHK	SCALE
JAMB	2/12	DPN	2:1
SHT 1 OF 1			SIZE A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[MLT1S-CP316](#) [MLT2S-CP316](#) [MLT4S-CP316](#) [MLT6S-CP316](#) [MLT8S-CP316](#) [MLT10S-CP316](#) [MLT2.7S-CP316](#)