THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER*	WEIGHT lbs/100 pcs (g)/100 pcs	USE WITH ANY OF THESE CABLE TIE CROSS-SECTIONS	MAX. SCREW SIZE
MBMS-S10Y	.123 (55.8)	MINIATURE INTERMEDIATE STANDARD	#10 (M5)

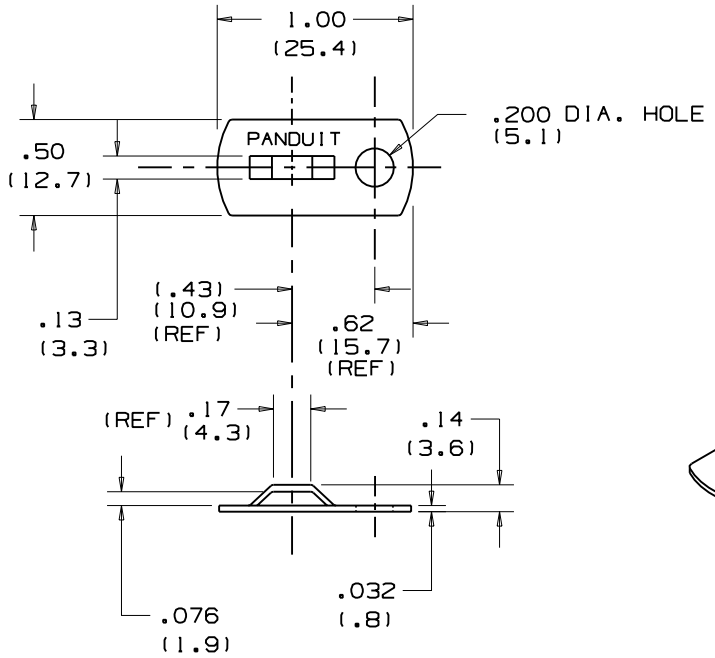

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. MATERIAL: ALUMINUM ALLOY - 3003-H14 (HALF HARD, TEMPER).
3. FINISH: RoHS COMPLIANT TCP COATING CORROSION RESISTANCE: 168 HRS SALT SPRAY PER ASTM-B-117

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

PANDUIT CORP. TINLEY PARK, ILLINOIS

MBMS-S10Y
METAL MOUNT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25]
(.XX) ±0.02 [0.5] ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JAD
MAT'L: SEE NOTE 2,3
SCALE NONE
DATE 7/27/06
CHK'D
DRAWING NO. GB0239LW
DWG SIZE A

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
R	7/27/06	JAD		INITIAL RELEASE	GB0239LW R		

Downloaded from Arrow.com.