

LTC3765/LTC3766

360W Isolated Forward Converter with Synchronous Rectification

DESCRIPTION

Demonstration circuit 2199A-A is a 360W isolated forward converter with synchronous rectification featuring the [LTC3765/LTC3766](#). It produces a regulated 12V, 30A output from an input voltage range of 36V to 60V.

This circuit was designed to demonstrate the high levels of performance, efficiency, and small solution size attainable using these parts in an active-clamp-reset forward converter power supply, suitable for telecom, industrial, and other applications. It has a 4.7in² solution footprint area. Synchronous rectification helps to attain an effi-

ciency exceeding 96%. Secondary-side control eliminates complex opto-coupler feedback, providing fast transient response with minimum output capacitance. For other output requirements, see the LTC3766 data sheet or contact the LTC sales.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2199A-A>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		36		60	V
V _{OUT}	Output Voltage		11.76	12.0	12.24	V
I _{OUT}	Output Current Range, Continuous	200LFM	0		30	A
f _{SW}	Switching (Clock) Frequency			200		kHz
V _{OUT(P-P)}	Output Ripple	V _{IN} = 24V, I _{OUT} = 30A (20MHz BW)		60		mV _{P-P}
I _{REG}	Output Regulation	Line and Load (36V _{IN} to 60V _{IN} , 0A _{OUT} to 30A _{OUT})		±0.02		%
P _{OUT} /P _{IN}	Efficiency (See Figure 3)	V _{IN} = 48V, I _{OUT} = 30A		96		%
	Isolation	Basic		1500		VDC
	Approximate Solution Size	Component Area × Top Component Height		4.7in ² × 0.6		Inches

OPERATING PRINCIPLES

The LTC3765 active clamp forward controller and gate driver is used on the primary and provides start-up, gate drive, and protection functions. Once start-up is accomplished, the LTC3766 high efficiency, secondary-side synchronous forward controller takes over, and provides the LTC3765 with timing information and bias power through a small pulse transformer.

When input voltage is applied, the LTC3765 commences soft-start of the output voltage. When the output reaches the RUN threshold, the LTC3766 comes alive and takes control by sending encoded PWM gate pulses to the LTC3765 through T2. These pulses also provide primary bias power efficiently over a wide input voltage range.

The transition from primary to secondary control occurs at some fraction of the nominal output voltage. From then on, operation and design is reduced to that of a simple

buck converter. Secondary control eliminates delays, tames large-signal overshoot, and reduces output capacitance needed to meet transient response requirements.

An optional LC filter stage on the input lowers RMS input current. The filter must have output impedance that is less than the converter input impedance to assure stability. This may require a damping impedance, which is provided by R1. (See Linear Technology Application Note 19 for a discussion of input filter stability.) R1 is coupled through a tiny 2mm × 2mm inductor L1, and provides damping with arbitrarily low source impedance. For bench testing, an electrolytic capacitor has been added at the input terminals to provide suitable ripple current capability. The values selected have a filter resonant frequency that is below the converter switching frequency, thus avoiding high circulating currents in the filter.

QUICK START PROCEDURE

Demonstration circuit 2199A-A is easy to set up to evaluate the performance of the LTC3765/LTC3766. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the output voltage ripple by touching the probe tip and ground ring directly across the last output capacitor as shown in Figure 1.

1. Set an input power supply that is capable of 36V to 60V to 36V. Then turn off the supply.
2. Direct an airflow of 200LFM across the unit for sustained operation at full load.
3. With power off, connect the supply to the input terminals $+V_{IN}$ and $-V_{IN}$.
 - a. Input voltages lower than 36V can keep the converter from turning on due to the undervoltage lockout feature of the LTC3765/LTC3766.

- b. If efficiency measurements are desired, an ammeter capable of measuring 15ADC or a resistor shunt can be put in series with the input supply in order to measure the DC2199A-A's input current.
- c. A voltmeter with a capability of measuring at least 60V can be placed across the input terminals in order to get an accurate input voltage measurement.

4. Turn on the power at the input.

NOTE: Make sure that the input voltage never exceeds 60V.

5. Check for the proper output voltage of 12V. Turn off the power at the input.
6. Once the proper output voltages are established, connect a variable load capable of sinking 30A at 12V to the output terminals $+V_{OUT}$ and $-V_{OUT}$. Set the current for 0A.
 - a. If efficiency measurements are desired, an ammeter or a resistor shunt that is capable of handling 30ADC can be put in series with the output load in order to measure the DC2199A-A's output current.

QUICK START PROCEDURE

- b. A voltmeter with a capability of measuring at least 12V can be placed across the output terminals in order to get an accurate output voltage measurement.
7. Turn on the power at the input.
8. Once the proper output voltage is again established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other desired parameters.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

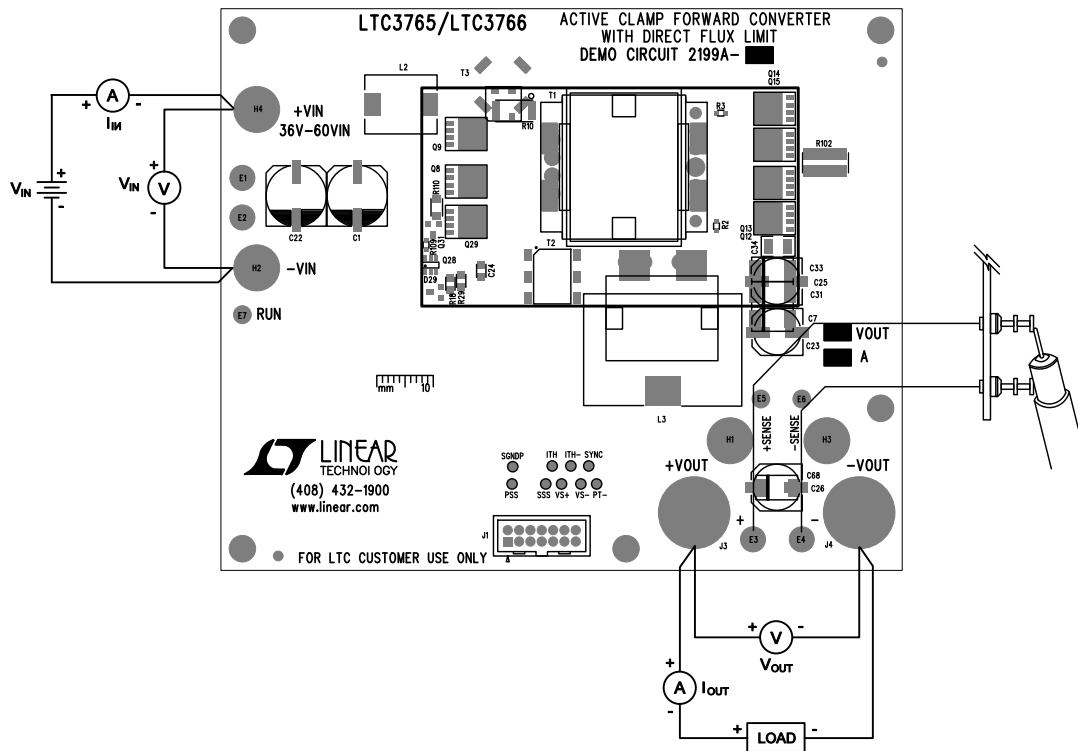


Figure 1. Proper Measurement Equipment Setup

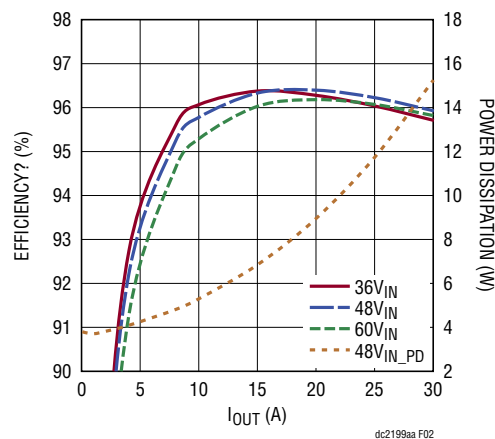


Figure 2. Efficiency and Power Dissipation

QUICK START PROCEDURE

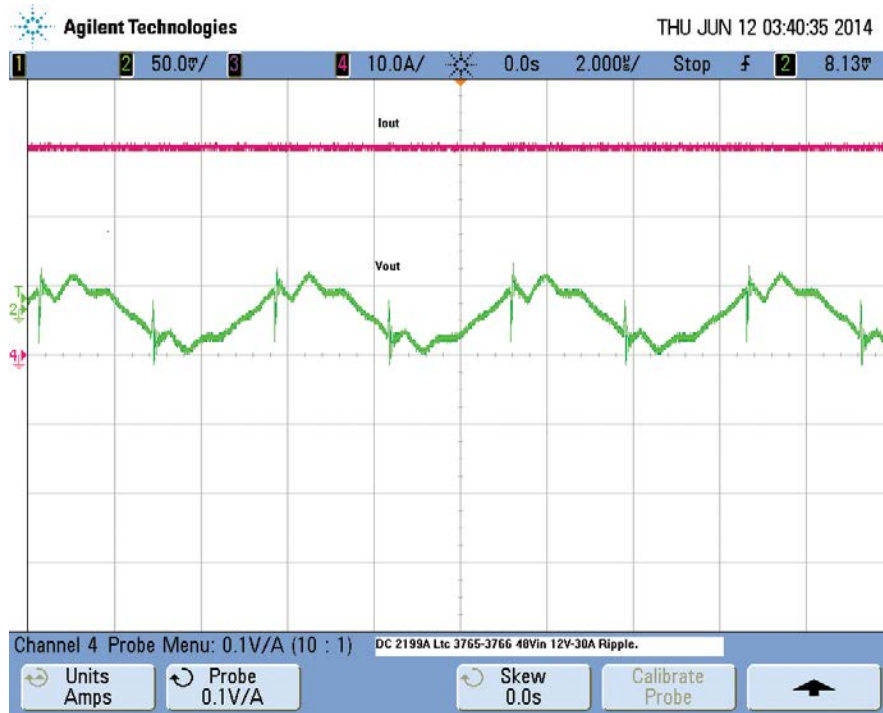


Figure 3. Output Ripple at 48V_{IN} and 30A_{OUT} (50mV, 10A, 2μs/DIV, 20MHz)

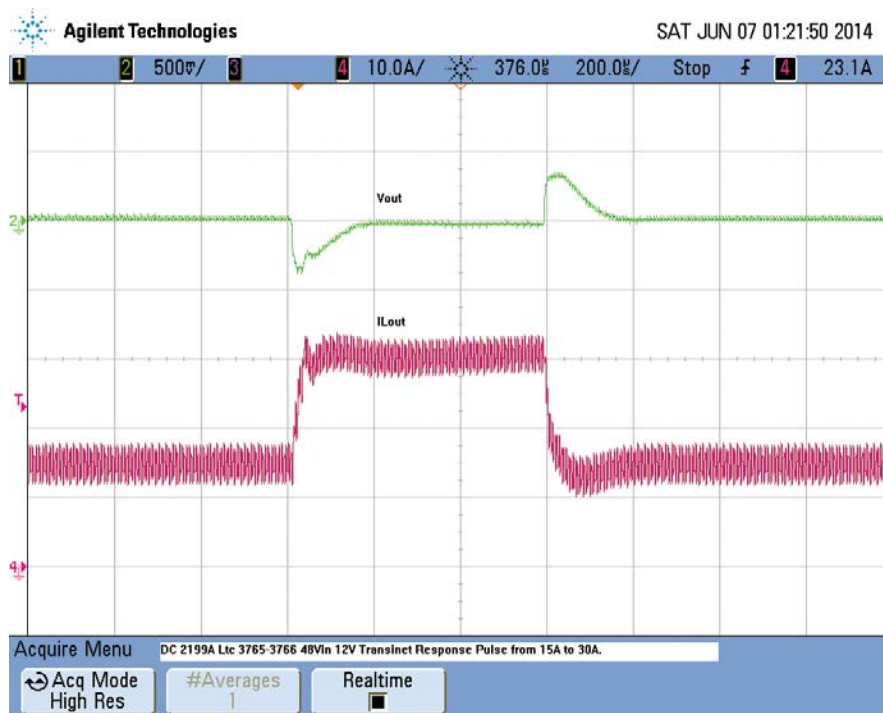


Figure 4. Transient Response Waveform at 48V_{IN} and 15A to 30A to 15A_{OUT} (10A, 500mV, 200μs/DIV)

QUICK START PROCEDURE

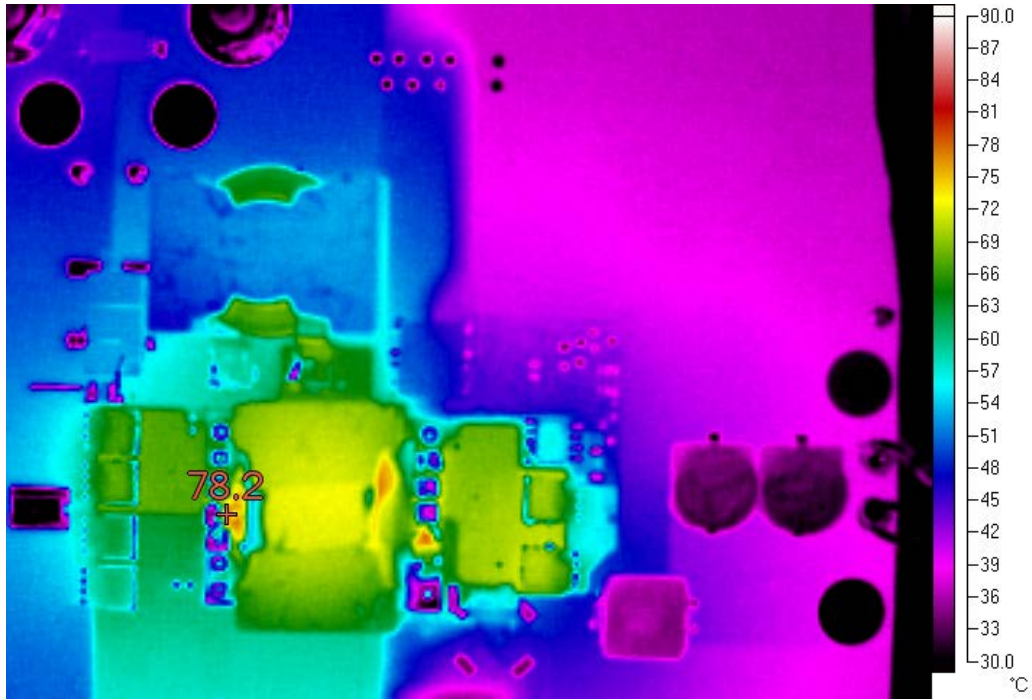


Figure 5. Thermal Map, Front Side at 48V_{IN} and 30A_{OUT} (T_A = 25°C, 200LFM)

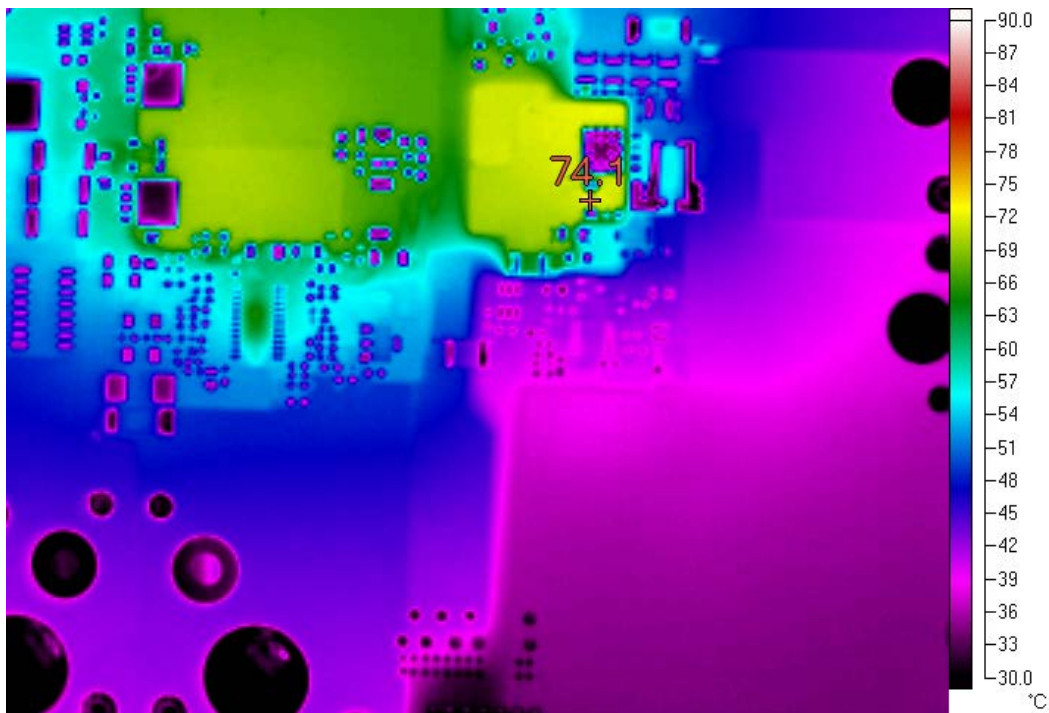


Figure 6. Thermal Map, Back Side at 48V_{IN} and 30A_{OUT} (T_A = 25°C, 200LFM)

DEMO MANUAL DC2199A-A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	2	C1, C22	Cap., Alum., Elect., 33 μ F, 80V, CAP-10X12.5	PANASONIC, EEHZA1K330P
2	5	C2, C3, C4, C5, C6	CAP., X7R, 4.7 μ F, 100V, 10%, 1210	MURATA, GRM32ER72A475KE14
3	4	C7, C31, C33, C68	CAP., POSCAP, 150 μ F, 16V, 20%, 7343	PANASONIC, 16TQC150MYF
4	1	C10	CAP., X7R, 2.2nF, 630V, 5%, 1206	MURATA, GRM31A7U2J222JW31
5	1	C11	CAP., X7R, 0.015 μ F, 25V, 10%, 0603	AVX, 06033C153KAT2A
6	2	C24, C71	CAP., X7R, 1.0 μ F, 16V, 10%, 0805	MURATA, GRM21BR71C105KA01
7	1	C30	CAP., X7R, 2200pF, 250V, 10%, 1812	MURATA, GA343QR7GD222KW01L
8	1	C34	CAP., X5R, 22 μ F, 16V, 20%, 1206/1210	MURATA, GRM32ER71C226MEA8L
9	1	C51	CAP., COG, 470pF, 630V, 5%, 1206	MURATA, GRM31A5C2J471JW01
10	1	C66	CAP., X7R, 0.047 μ F, 200V, X7R, 10% 1206	MURATA, GRM31CR72D473KW03
11	1	C69	CAP., X7R, 1.5nF, 630V, 5%, 1206	MURATA, GRM31A7U2J152JW31
12	2	C70, C76	CAP., X7R, 3.3nF, 25V, 10%, 0603	AVX, 06033C332KAT2A
13	2	C72, C102	CAP., X7R, 0.1 μ F, 25V, 10%, 0805	AVX, 08053C104KAT2A
14	4	C55, C73, C80, C119	CAP., X7R, 1nF, 25V, 10%, 0603	MURATA, GRM188R71E102KA01
15	1	C75	CAP., NPO, 100pF, 25V, 5%, 0603	AVX, 06033A101JAT2A
16	1	C77	CAP., X7R, 4.7 μ F, 25V, 10%, 1206	AVX, 12063C475KAT2A
17	1	C78	CAP., NPO, 0.033 μ F, 25V, 5%, 0805	TDK, C2012C0G1E333J
18	1	C79	CAP., X7R, 4.7nF, 25V, 10%, 0603	MURATA, GRM188R71E472KA01
19	1	C101	CAP., NPO, 220pF, 25V, 5%, 0603	AVX, 06033A221JAT2A
20	1	C106	CAP., COG, 150pF, 250V, 5%, 0603	TDK, C1608C0G2E151J080AA
21	1	C112	CAP., X7R, 0.22 μ F, 250V, 10%, 1206/1210	TDK C3225X7R2E224K
22	1	C113	CAP., X7R, 0.033 μ F, 25V, 10%, 0603	AVX, 06033C333KAT2A
23	1	C118	CAP., NPO, 1500pF, 5%, 0603	AVX, 06033A152JAT2A
24	2	D1, D34	DIODE ULTRA FAST 1A, 200V, SMP	VISHAY, ES1PD-M3 / 84A
25	3	D27, D29, D30	DIODE SCHOTTKY 60V, 0.5A, SOT23	DIODES INC, ZHCS506TA
26	1	D40	DIODE, 1N4148WS, SOD323	VISHAY, 1N4148WS-E3-08
27	1	L1	INDUCTOR, 1.0 μ H, 20%	COILCRAFT, XPL2010-102ML
28	1	L2	INDUCTOR, 2.0 μ H, 20%	VISHAY, IHLP4040DZER2R0M11
29	1	L3	INDUCTOR, 3.3 μ H, 10%	COILCRAFT, SER2915L-332KL
30	2	Q8, Q9	MOSFET N-CH 150V, POWERPAK-SO-8	INFINEON, BSC190N15NS3 G
31	4	Q12, Q13, Q14, Q15	MOSFET N-CH 80V, POWERPAK-SO-8	INFINEON, BSC028N06NS3
32	1	Q27	TRANS., NPN 40V, 1A, SOT-89	DIODE INC., FCX491ATA
33	1	Q28	MOSFET, N-CH, SUPER, SOT-6	FAIRCHILD, FDC2512-NL
34	1	Q29	MOSFET, P-CH, IRF6217, POWERPAK-SO-8	IR, IRF6217TRPBF
35	1	R1	RES., CHIP, 0.33, 1/4W, 5%, 2512	PANASONIC, ERJ-1TRQJR33U
36	1	R4	RES., CHIP, 8.2k, 1W, 5%, 2512	PANASONIC, ERJ-1TYJ822U
37	1	R18	RES., CHIP, 102k, 1/8W, 1%, 0805	VISHAY, CRCW0805102KFKEA
38	1	R22	RES., CHIP, 3.74k, 1/16W, 1%, 0603	VISHAY, CRCW06033K74FKEA
39	2	R23, R24	RES., CHIP, 8.2, 1/4W, 5%, 1206	VISHAY, CRCW12068R20JKEA
40	1	R29	RES., CHIP, 100k, 1/8W, 5%, 0805	VISHAY, CRCW0805100KJNEA
41	1	R41	RES., CHIP, 11.5k, 1/16W, 1%, 0603	VISHAY, CRCW060311K5FKEA

dc2199aafa

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
42	1	R42	RES., CHIP, 1k, 1/16W, 1%, 0603	VISHAY, CRCW06031K00FKEA
43	1	R46	RES., CHIP, 604, 1/16W, 1%, 0603	VISHAY, CRCW0603604RFKEA
44	2	R51, R52	RES., CHIP, 3.0, 1/4W, 5%, 1206	PANASONIC, ERJ-8GEYJ3R0V
45	1	R53	RES., CHIP, 6.8, 1/2W, 1%, 1206	PANASONIC, ERJ-8RQF6R8V
46	1	R68	RES., CHIP, 2.15k, 1/16W, 1%, 0603	VISHAY, CRCW06032K15FKEA
47	1	R69	RES., CHIP, 46.4k, 1/16W, 1%, 0603	VISHAY, CRCW060346K4FKEA
48	1	R75	RES., CHIP, 215, 1/8W, 1%, 0805	VISHAY, CRCW0805215RFKEA
49	1	R76	RES., CHIP, 4.22, 1/8W, 1%, 0805	VISHAY, CRCW08054R22FKEA
50	1	R84	RES., CHIP, 1.21k, 1/8W, 1%, 0805	VISHAY, CRCW08051K21FKEA
51	4	R101, R148, R149, R151	RES., CHIP, 100, 1/16W, 1%, 0603	VISHAY, CRCW0603100RFKEA
52	1	R109	RES., CHIP, 10k, 1/16W, 1%, 0603	VISHAY, CRCW060310K0FKEA
53	1	R110	RES., CHIP, 1.20, 1/2W, 1%, 1206	SUSUMU, RL1632S-1R20-F
54	1	R114	RES., CHIP, 28.7k, 1/16W, 1%, 0603	VISHAY, CRCW060328K7FKEA
55	1	R117	RES., CHIP, 12.7k, 1/16W, 1%, 0603	VISHAY, CRCW060312K7FKEA
56	1	R118	RES., CHIP, 681k, 1/16W, 1%, 0603	VISHAY, CRCW0603681KFKEA
57	1	R121	RES., CHIP, 133k, 1/16W, 1%, 0603	VISHAY, CRCW0603133KFKEA
58	1	R123	RES., CHIP, 118k, 1/16W, 1%, 0603	VISHAY, CRCW0603118KFKEA
59	1	R125	RES., CHIP, 17.4k, 1/16W, 1%, 0603	VISHAY, CRCW060317K4FKEA
60	1	R136	RES., CHIP, 0.005, 1W, 1%, 1225	SUSUMU, KRL6432D-M-R005-F-T5
61	1	R139	RES., CHIP, 26.7k, 1/16W, 1%, 0603	VISHAY, CRCW060326K7FKEA
62	1	R140	RES., CHIP, 274, 1/8W, 1%, 0805	PANASONIC, ERJ-6ENF2740V
63	1	R150	RES., CHIP, 14.3k, 1/16W, 1%, 0603	VISHAY, CRCW060314K3FKEA
64	1	T1	TRANSFORMER	CHAMPS TECH., LTC-PQ26-0402
65	1	T2	TRANSFORMER, 1.25:1	Pulse, PA3493NL
66	1	T3	TRANSFORMER, 1:100, CT02-100	ICE COMPONENTS, CT02-100 = 1:100
67	1	U1	I.C. LTC3765EMSE, MSOP-16PIN	LINEAR TECH., LTC3765EMSE#PBF
68	1	U2	I.C. LTC3766EGN, SSOP-GN28	LINEAR TECH., LTC3766EGN#PBF

Additional Demo Board Circuit Components

1	0	C12, C13, C14, C16, C20	CAP., OPT, 0603	OPT
2	0	C8, C9, C18, C19, C103, C111	CAP., OPT, 0603	OPT
3	0	C15, C21, C114	CAP., OPT, 0805	OPT
4	0	C17, C116	CAP., OPT, 1206	OPT
5	0	C23, C25, C26	CAP., OPT, CAP-SVPF-E12	OPT
6	2	C74, C105	CAP, 0Ω, JUMPER 0603	VISHAY, CRCW06030000Z0EA
7	0	D2	DIODE TBD SOD323	OPT
8	0	D4, D35	DIODE OPT, SOD323	OPT
9	0	D28, D37, D38	DIODE OPT, SOT23	OPT
10	0	L4	INDUCTOR, OPT, DO1606T	OPT
11	0	Q1, Q2	MOSFET, OPT, SOT23-6	OPT
12	0	Q4	MOSFET, OPT, D-PAK	OPT
13	0	Q11, Q23, Q24	MOSFET, OPT, POWERPAK-SO-8	OPT
14	0	R5	RES., OPT, 2512/2010	OPT

DEMO MANUAL DC2199A-A


PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
15	13	R6, R7, R8, R9, R49, R103, R111, R112, R113, R122, R124, R137, R146	RES., CHIP, 0 Ω , 0603	VISHAY, CRCW06030000Z0EA
16	0	R10, R13, R14, R15	RES., OPT, 2512	OPT
17	0	R17, R108, R116, R127	RES., OPT, 1206	OPT
18	0	R25, R26, R27, R28, R30, R31, R32, R33, R34, R35, R43, R106, R107, R119, R120, R126, R138, R147	RES., OPT, 0603	OPT
19	1	R77	RES., CHIP, 0, 1/8W, 0805	VISHAY, CRCW08050000Z0EA
20	1	R102	RES., CHIP, 0 Ω , 1225	TEPRO, RN5326
21	1	R115	RES., CHIP, 0, 1/4W, 1206	VISHAY, CRCW12060000Z0EA
22	0	R152	RES., OPT, 0805	OPT
23	0	U3	I.C. OPT, SO16	OPT

Hardware: For Demo Board Only

1	4	E1, E2, E3, E4	TESTPOINT, TURRET, .094"	MILL-MAX, 2501-2-00-80-00-00-07-0
2	3	E5, E6, E7	TESTPOINT, TURRET, .061"	MILL-MAX, 2308-2-00-80-00-00-07-0
3	0	J1	HEADER, OPT, 2 \times 7PIN, 0.079CC	OPT, MOLEX, 87331-1420
4	2	J3, J4	STUD, TEST PIN	PEM, KFH-032-10
5	4	J3, J4(2 EACH)	NUT, BRASS, #10-32	ANY #10-32
6	2	J3, J4	WASHER, STAR #10 BRASS NICKEL	ANY, #10EXT BZ TN
7	2	J3, J4	Ring, Lug Ring # 10	KEYSTONE, 8205
8	0	TP1-TP6	PAD-SMD	PAD-SMD
9	4	(STAND-OFF)	STAND-OFF, NYLON 0.25"	KEYSTONE, 8831 (SNAP ON)
10	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 2199A

SCHEMATIC DIAGRAM

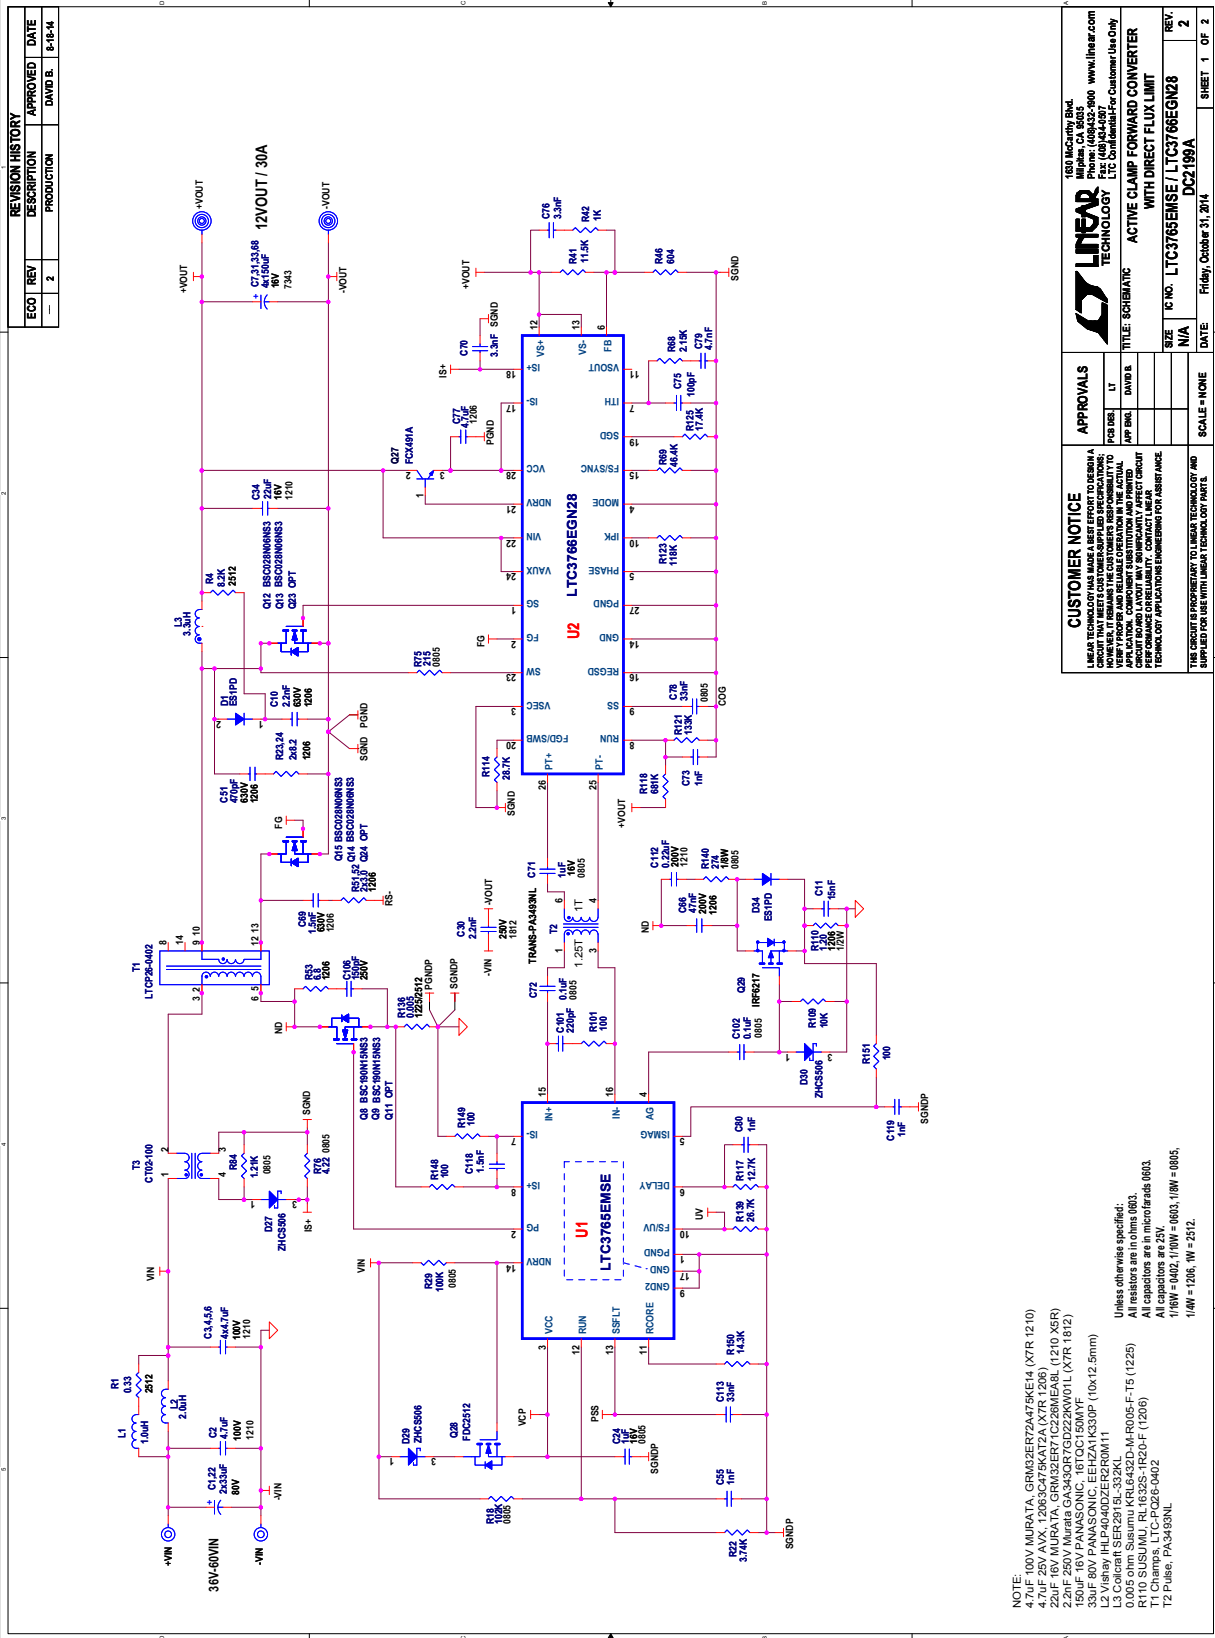

REVISION HISTORY			APPROVED	DATE
ECO	REV	DESCRIPTION	DAVID B.	8-18-14
-	2	PRODUCTION		

CUSTOMER NOTICE
 LINEAR TECHNOLOGY MAKES NO REPRESENTATION OR WARRANTY THAT THIS SCHEMATIC OR CIRCUIT WILL MEET CUSTOMER-SPECIFIED REQUIREMENTS. THE USER ASSUMES ALL LIABILITY FOR THE APPLICATION, COMPONENT SUBSTITUTION AND IMPROVED PERFORMANCE. CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.

APPROVALS
 FOR DESIG: LT
 APPR: DAVID B.

SCALE - NONE

SIZE - N/A
DATE - Friday, October 31, 2014
REV. 2
DC2199A

1630 McCarty Blvd.
 Milpitas, CA 95035
 Tel: (408) 255-0000 www.linear.com
 Fax: (408) 255-0097
 LTC Confidential For Customer Use Only

TITLE SCHEMATIC ACTIVE CLAMP FORWARD CONVERTER WITH DIRECT FLUX LIMIT

SHEET 1 OF 2


NOTE:
 T1: 100V MURATA, GRM32ER70A75E14 (XTR 1210)
 L1: 4.7μF 25V AVX, 120632A75K12A (XTR 1206)
 L2: 2.0μF 250V Murata GA34QR7G2220W01L (XTR 1812)
 C1: 150μF 16V PANASONIC - 16TCC150MYF
 C2: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C3: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C4: 22μF 50V TAIYO YUDEN T1E220K01000100 (10x12.5mm)
 C5: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C6: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C7: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C8: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C9: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C10: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C11: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 C12: 100μF 80V TAIYO YUDEN T1E100K01000100 (10x12.5mm)
 D1: 1N4007
 D2: 1N4007
 D3: 1N4007
 D4: 1N4007
 R1: 0.33Ω
 R2: 100k
 R3: 1.2k
 R4: 1.2k
 R5: 1.2k
 R6: 1.2k
 R7: 1.2k
 R8: 1.2k
 R9: 1.2k
 R10: 1.2k
 R11: 1.2k
 R12: 1.2k
 R13: 1.2k
 R14: 1.2k
 R15: 1.2k
 U1: LTC3766EMSE
 U2: LTC3766EMSE
 T1: 100V MURATA, GRM32ER70A75E14 (XTR 1210)
 T2: P.see, PA3453NL

Unless otherwise specified:
 All resistors are in ohms (Ω).
 All capacitors are 25V.
 1/8W = 0402, 1/10W = 0603, 1/8W = 0805,
 1/4W = 1206, 1W = 2512.

Simplified Schematic (without Unneeded Components)

DEMO MANUAL DC2199A-A

SCHEMATIC DIAGRAM

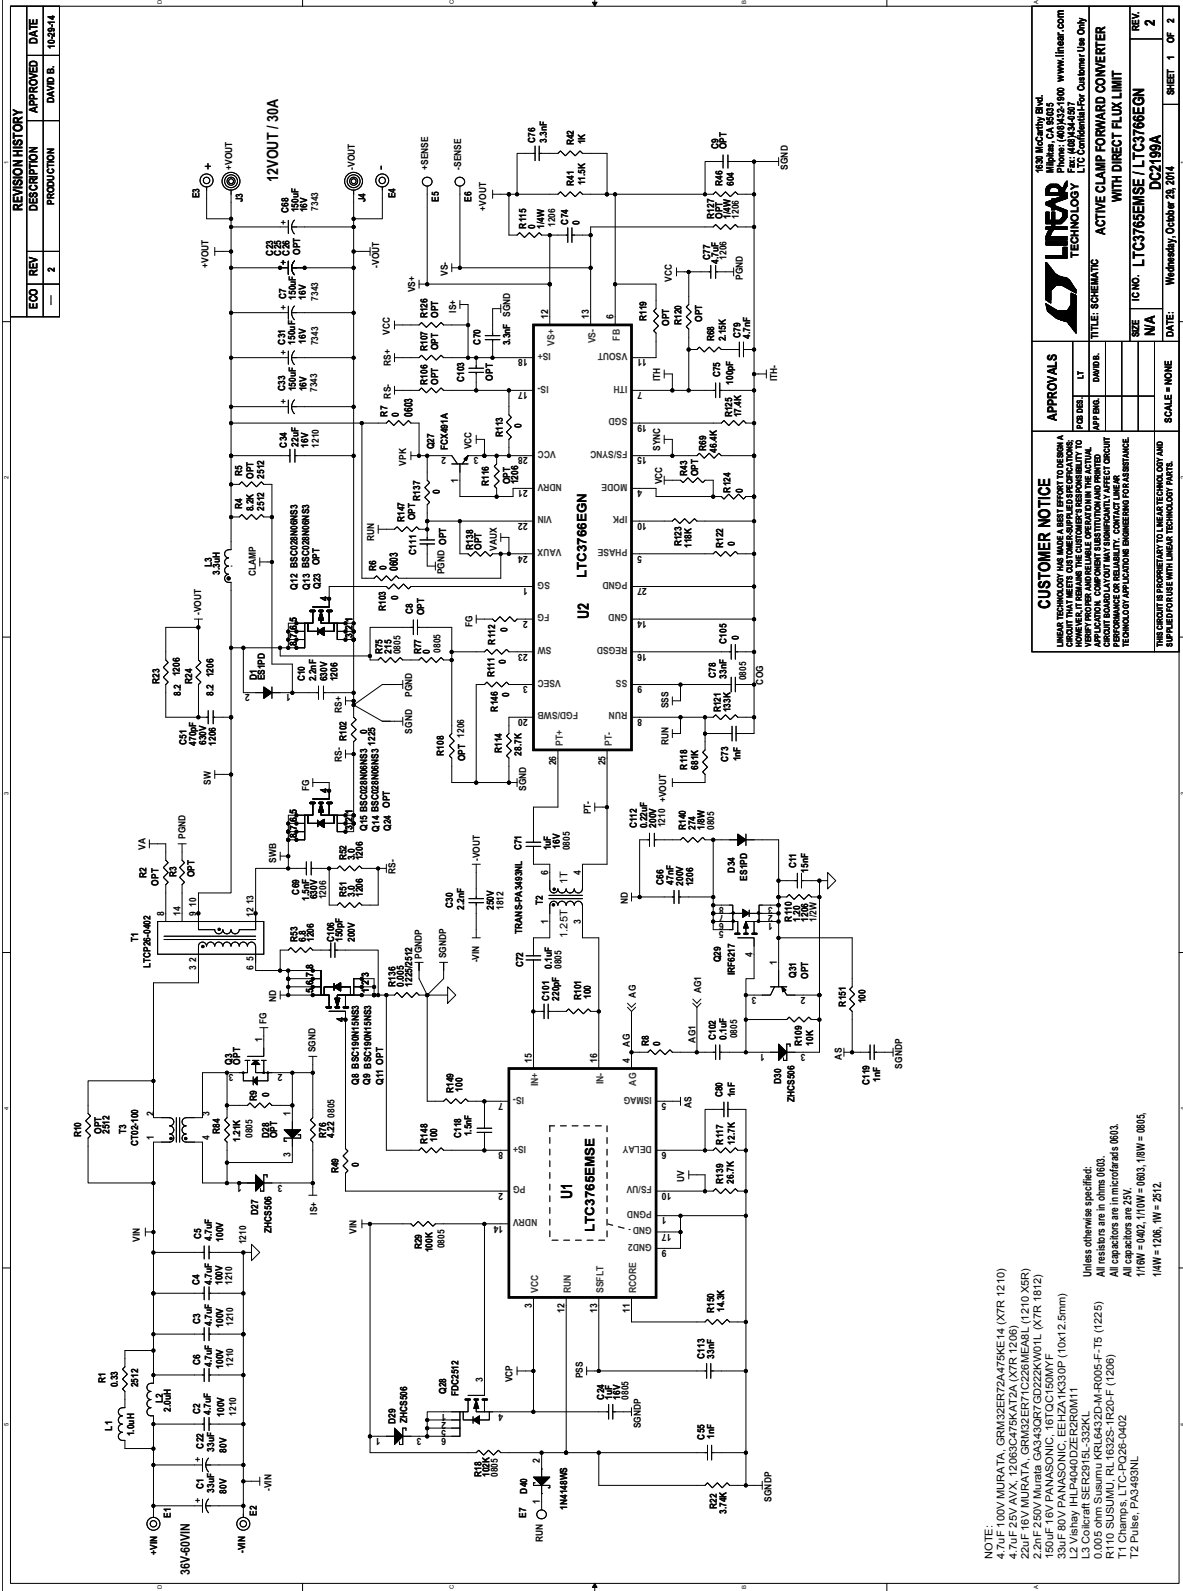

ECO	REV	DESCRIPTION	APPROVED DATE
—	2	PRODUCTION	DAVID B. 10-28-14

APPROVALS	
FOR DES.	UT
APP. MGR.	DWBL
SCALE	1:1 NONE

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS REVIEWED THIS SCHEMATIC AND CONFIRMS THAT IT MEETS THE DESIGN REQUIREMENTS FOR THE TARGET APPLICATION. COMPONENT SUBSTITUTION AND REVISIONS ARE NOT ADVISED WITHOUT THE CUSTOMER'S APPROVAL. PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS REVIEWED THIS SCHEMATIC AND CONFIRMS THAT IT MEETS THE DESIGN REQUIREMENTS FOR THE TARGET APPLICATION. COMPONENT SUBSTITUTION AND REVISIONS ARE NOT ADVISED WITHOUT THE CUSTOMER'S APPROVAL. PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS REVIEWED THIS SCHEMATIC AND CONFIRMS THAT IT MEETS THE DESIGN REQUIREMENTS FOR THE TARGET APPLICATION. COMPONENT SUBSTITUTION AND REVISIONS ARE NOT ADVISED WITHOUT THE CUSTOMER'S APPROVAL. PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	

NOTE:
 4.7nF 100V MURATA, GRM32ERT2A75KE14 (X7R 1210)
 2.2nF 250V MURATA, GRM32ERT7C22ME9L (L210 X5R)
 2.2nF 250V MURATA, GRM32ERT7C22ME9L (L210 X5R)
 150uF 16V PANASONIC, 16TCC150MYF
 100uF 16V PANASONIC, 16TCC100MYF
 100uF 16V PANASONIC, 16TCC100MYF
 100uF 16V PANASONIC, 16TCC100MYF
 100uF 16V PANASONIC, 16TCC100MYF
 L2 Vishay, HLLP4640DZERR0011
 L3 Coilcraft, SER2815L-333KL
 0.095 ohm Suisumu, KRL6432D4L-R005-F-T5 (1225)
 T1 D. SUSHI, SMD0603-100K-0603, 181V-0805
 T2 Pulse, TC-PC26-06-02

Unless otherwise specified:
 All resistors are in ohms (Ω).
 All capacitors are in microfarads (μF).
 110W = 062, 110W = 063, 181V = 085,
 11W = 1206, 1W = 217.

LINEAR TECHNOLOGY
 1630 McCarty Blvd.
 Irvine, CA 92614
 Phone: (949) 464-1000 www.linear.com
 Fax: (949) 464-1001
 Email: linartech@linear.com


APPROVALS	
FOR DES.	UT
APP. MGR.	DWBL
SCALE	1:1 NONE

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS REVIEWED THIS SCHEMATIC AND CONFIRMS THAT IT MEETS THE DESIGN REQUIREMENTS FOR THE TARGET APPLICATION. COMPONENT SUBSTITUTION AND REVISIONS ARE NOT ADVISED WITHOUT THE CUSTOMER'S APPROVAL. PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS REVIEWED THIS SCHEMATIC AND CONFIRMS THAT IT MEETS THE DESIGN REQUIREMENTS FOR THE TARGET APPLICATION. COMPONENT SUBSTITUTION AND REVISIONS ARE NOT ADVISED WITHOUT THE CUSTOMER'S APPROVAL. PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	

CUSTOMER NOTICE	
LINEAR TECHNOLOGY HAS REVIEWED THIS SCHEMATIC AND CONFIRMS THAT IT MEETS THE DESIGN REQUIREMENTS FOR THE TARGET APPLICATION. COMPONENT SUBSTITUTION AND REVISIONS ARE NOT ADVISED WITHOUT THE CUSTOMER'S APPROVAL. PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.	

SCHEMATIC DIAGRAM

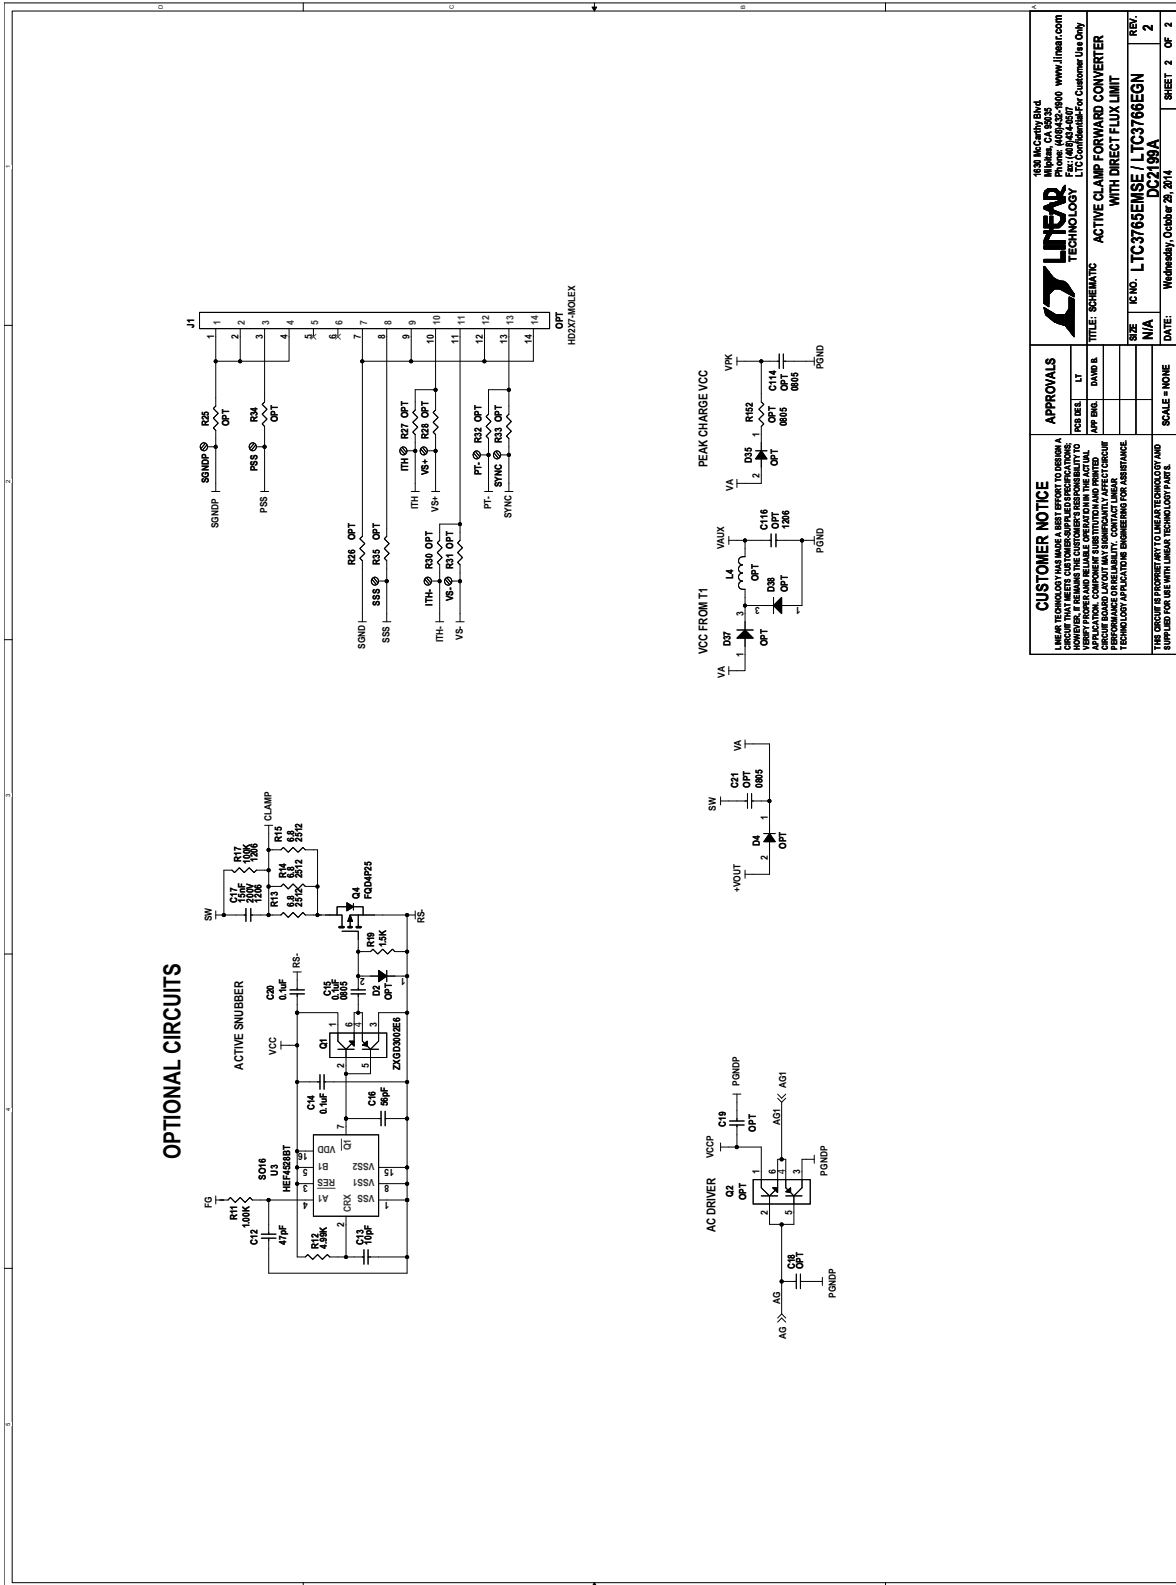

CUSTOMER NOTICE		APPROVALS	
LINEAR TECHNOLOGY ASSUMES NO LIABILITY FOR THE USE OF THIS SCHEMATIC FOR ANY APPLICATIONS OTHER THAN THE INTENDED APPLICATION. CUSTOMER MUST VERIFY THE ACTUAL PERFORMANCE OF THE CIRCUIT IN THEIR APPLICATION. CONTACT LINEAR TECHNOLOGY FOR FURTHER INFORMATION.		DESIGNED BY	DATE
LINEAR TECHNOLOGY CORPORATION 90 CALEXTON AVENUE MILFORD, MA 01860 TEL: (508) 652-0000 WWW.LINEAR.COM		DESIGNED BY	DATE
TITLE: SCHEMATIC ACTIVE CLAMP FORWARD CONVERTER WITH DIRECT FLUX LIMIT		SCALE	SCALE = NONE
REV: 2		SHEET 2 OF 3	
DC2199A		LTC3766EON	
Wednesday, October 29, 2014			

Full Schematic, page 2

DEMO MANUAL DC2199A-A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[DC2199A-A](#)