



REV.	DATE	DESCRIPTION					
NC	01/29/07	INITIAL RELEASE					

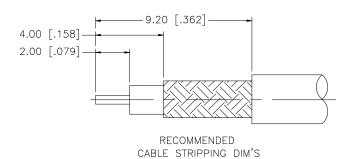

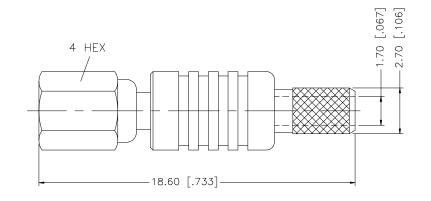





NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .128"
- 2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.	APPROVALS DATE		DATE	Amphonal Connov		
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	01/29/07	Amphenol Connex		
6					0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm	CHECKED			PART DESCRIPTION		
4						ISSUED			SSMC CRIMP PLUG		
3	CONTACT PIN	BER. COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET	1 OF 1		(FOR RG-174/U, 188A/U, 316/U)		
2	INSULATOR	TEFLON	NATURAL	1	$.020315 = \pm 0.007$ "	1 01 1			PART NO.		
1	BODY			$.315 - 1.180 = \pm 0.015$ " $1.180 - 4.724 = \pm 0.020$ "				153100			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/153/153	3100.DWG	DWG. NO. 153100.DWG REV. NC SIZE A SCALE NA		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Amphenol}}{\frac{153100}{}}$