THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


24404								
PANDUIT PART #	STUD SIZE	L ± (0,8)	W ± [0,3]	C ± .02 [0,5]	$M\pm \frac{.03}{[0,8]}$	H± (0,3)	TOOLS	
EV10-6LFB	#6	1.03 [26,2]	.30 [7,6]	.23 [5,8]	.80 [20,3]	.14 [3,6]	*CT-100A	
EV10-8LFB	#8	1.05 [26,7]	.30 [7,6]	.23 [5,8]	.80 [20,3]	.16 [4,1]	CT-600A (CT-550CH) - CT-1550 - CT-1551	
EV10-10LFB EV10-14LFB	#10	1.04 [26,4]	.34 [8,6]	.23 [5,8]	.80 [20,3]	.19 [4,8]		
	1/4"	1.19 [30,2]	.46 [11,7]	.36 [9,1]	.90 [22,9]	.25 [6,4]	CT-2500 (CT-2550CH)	

*RATED FOR 300V, 75°C WITH CT-100A

NOTES:

- 1. UL LISTED AND CSA CERTIFIED FOR:
 - A. #12-10 AWG [4,0-6,0 mm²] STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE C. 600 V. MAX. VOLTAGE RATING

 - (1000 V. IN SIGNS, FIXTURES & LUMINARIES)
- 2. MATERIAL:
 - A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED B. HOUSING: VINYL, YELLOW
- 3. WIRE STRIP LENGTH: 5/16" $^{+1/32}_{-0}$ [7,9mm $^{+0,8}_{-0}$]
- 4. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

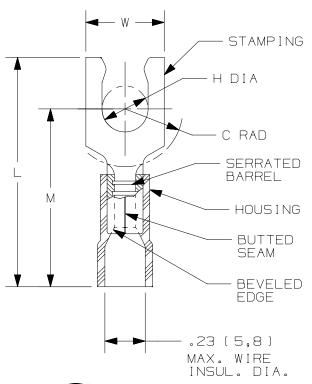





LR31212

A								STRONGHOLD LOCKING FORK TERMINALS VINYL INSULATED, BUTTED SEAM #12-10 AWG CUSTOMER DRAWING					
-								O0123SHT/00 DATASET FILE NAME 00123SHT_DC/00			PANDUIT	тм	
								UI DIMENS	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		SEE NOTES		
DA/12	00	2/18	JHNU	TMR	RGB	RELEASED	00123SH	.xx :		angles : THIRD ANGLE PROJECTION		DRAWING NUMBER:	
010100	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	JHNU	2/18	TMR	N.T.S.	SHEET 1 OF 1	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

EV10-14LFB-Q EV10-6LFB-Q EV10-8LFB-Q EV10-10LFB-Q