

INTERCONNECTS

SERIES 305, 310 DISCRETE INSULATED RECEPTACLES

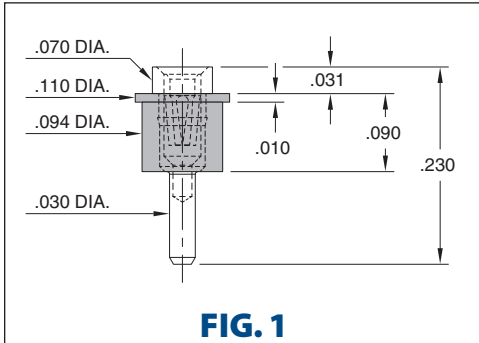


FIG. 1

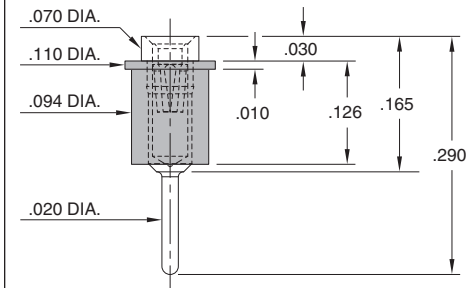


FIG. 2

- Series 305 and 310 single position insulated parts are offered in standard and low profile styles
305-43-001-30-010800 uses pin #0501-0
310-43-001-30-010800 uses pin #1001-0
See pages 162 and 165 for details
- Insulated terminals are used to electrically isolate single pin interconnects from surrounding conductive elements in an assembly. The plastic sleeve provides insulation of the terminal as it passes through a board or conductive housing or from other conductive components. The sleeve also facilitates the handling of small, individual terminals and can provide mechanical support for pins mounted on or through printed circuit boards
- Insulators are high temperature thermoplastic, suitable for most soldering operations



ORDERING INFORMATION

FIG. 1	Series 305...010800	Receptacle with Sleeve
	305-43-001-30-010800	
FIG. 2	Series 310...010800	Receptacle with Sleeve
	310-43-001-30-010800	

SPECIFICATIONS:

Insulating Sleeve tolerance: $\pm .003$

Packaging: Bulk



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=			43				
Sleeve (Pin)			200 μ " Sn				
Contact (Clip)			30 μ " Au				



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mill-Max:](#)

[310-43-001-30-010800](#) [305-43-001-30-010800](#)