



REV.	DATE	DESCRIPTION					
NC	08/18/98	INITIAL RELEASE					
А	01/23/07	UPDATE DRAWING FORMAT					

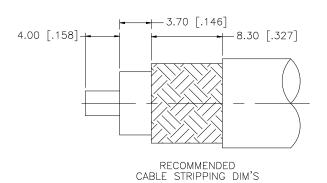

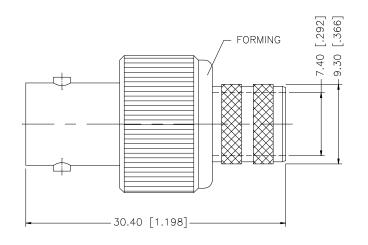





## NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .429"
- 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118"

R					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.	APPROVALS	DATE	Amphonol Connov	
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN G.R.S.	01/23/07	Amphenol Connex	
6					0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm	CHECKED		PART DESCRIPTION	
4	FERRULE	COPPER	NICKEL	1	30 - 120mm ± 0.50mm	ISSUED		BNC CRIMP JACK (FOR LMR400, BELDEN 8214, 9913, 9914)	
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET 1 OF 1			
2	INSULATOR	TEFLON	NATURAL	1	$.020315 = \pm 0.007$ "	1 OF I		IRT NO.	
1	BODY BRASS		NICKEL	1	$\begin{array}{cccccccccccccccccccccccccccccccccccc$			112603	
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	C:/112/112	2603.DWG	DWG. NO. 112603.DWG REV. A SIZE A SCALE NA	

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Amphenol}}{\frac{112603}{}}$