

## **Static Shielding Bag 1000 Series**

This transparent metal-in static shielding bag is designed to provide a static safe environment for ESD sensitive electronic devices. Bags are printed with an ESD protective symbol and a lot code for traceability. Open top (1000 Series) and ZipTop (3000 Series) styles are available. The bags are heat sealable.

SCS Static Shielding Bags 1000 Series are manufactured from a polyester, metal, polyethylene laminate. The polyester dielectric in concert with the metal layer provides discharge shielding. The exterior being static dissipative allows electrostatic charges to be removed when grounded.

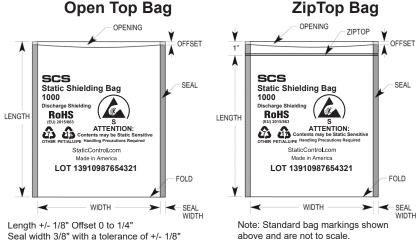

<sup>\*\*</sup> Bags are printed (hot stamp or thermal) with an ESD protective symbol and a lot code for traceability. \*\*

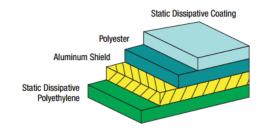

RoHS, REACH and Conflict Minerals, Statement
See the SCS RoHS, REACH, and Conflict Minerals Statement:
<a href="http://staticcontrol.com/PDF/Regulatory">http://staticcontrol.com/PDF/Regulatory</a> Statement SCS Bags.pdf

See the SCS Limited Warranty:

StaticControl.DescoIndustries.com/Limited-Warranty.aspx

Meets ANSI/ESD S20.20 and IEC 61340-5-1, Packaging standards ANSI/ESD S541 and IEC 61340-5-3, and Static Control Bag ANSI/ESD S11.4 Level 3

Physical	Typical Value	Testing Method
r Hysical	Typical value	resuring Method
Tensile Strength	4600 PSI, 32 MPa	ASTM D882
Puncture Resistance	12 lbs, 53 N	MIL-STD-3010C Method 2065
Seal Strength	11 lbs, 48 N	ASTM D882
Thickness	2.8 mils, 0.071 mm +/-10%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias
Electrical	Typical Value	Testing Method
ESD Shielding	<10 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	$1 \times 10^4 \text{ to} < 1 \times 10^{11} \text{ ohms}$	ANSI/ESD STM11.11
Surface Resistance - Exterior	< 1 x 10 <sup>11</sup> ohms	ANSI/ESD STM11.11
Static Decay	< 2 seconds	ETS 406D
Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	FTIR
Heat Sealing Conditions	Typical Value	
Temperature	300°F – 375°F, 149°C – 190°C	
Time	0.5 - 3.5 seconds	
Pressure	30 - 70 PSI, 206 - 482 KPa	

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.



Specifications and procedures subject to change without notice.

## m/Limited-Warranty.aspx 1000 SERIES STATIC SHIELDING BAG

926 JR Industrial Drive, Sanford, NC 27332

WEB SITE: StaticControl.com

PHONE (919) 718-0000 | WEST: (909) 627-9634

DRAWING NUMBER 1000 Series DATE June 2022

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## SCS:

<u>1001216 1001818 10068 1001016 1001018 1001430 1001518 1001620 10023 100430 10078 100824</u> <u>100912 3001212 3001216 1002020 100310 100816 1002126 1001020 1001111 1001222 1001236 1001924</u> 10028 10034 100534 100820 100920 3001018 3001214 30024 30026 300612 30066 300710