

# AC Common mode coil<Pin type:LF series> LF2020



## ◆ Outline

- In addition to the standard versions of parameters shown here, custom designs are available to meet your exact requirements.


## ◆ Application

- TV, VCR, AV, OA equipment for noise prevention.


## ◆ Features

- Small size and large inductance type.
- Excellent attenuation characteristics in low frequency range.
- RoHS Compliance

## ◆ Dimension (mm)

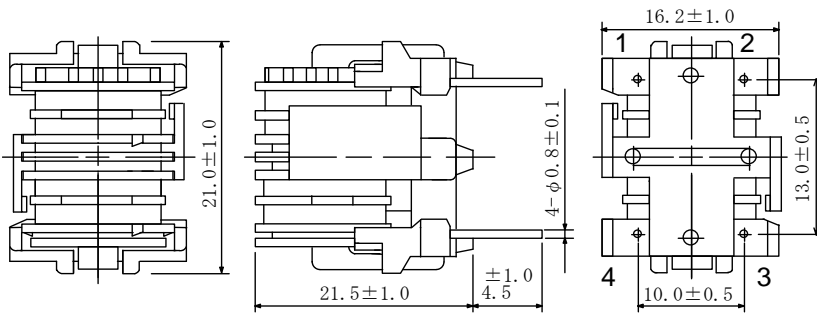

## ◆ Circuit



- \* Dimension does not include solder used on coil.
- \* Terminal pitch is measured at the base(not from tip of the pin)

## ◆ Specifications

Part No.	Stamp	Inductance [MIN.] (mH) (1-2)(4-3) 1kHz	Inductance Balance [MAX.] (μH)	D.C.R. (Ω) [MAX.] (1-2)(4-3) (at 20°C)	Rated current (50/60Hz) (Arms)※1
LF2020NP-222	222	2.2	150	0.24	1.3
LF2020NP-392	392	3.9	150	0.41	1.0
LF2020NP-103	103	10	550	1.00	0.6
LF2020NP-183	183	18	600	1.63	0.5
LF2020NP-223	223	22	800	2.04	0.4
LF2020NP-333	333	33	800	3.42	0.3

※1. Rated current: The AC current at which the temperature rise is  $\Delta t=45^{\circ}\text{C}$ . ( $T_a=20^{\circ}\text{C}$ ).

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sumida:

[LF2020NP-223](#) [LF2020NP-222](#) [LF2020NP-183](#) [LF2020NP-392](#) [LF2020NP-103](#) [LF2020NP-333](#)