

Features/Benefits

- Power switching up to 16 AMPS
- Sub-panel and Front-panel mounting
- PC and quick connect terminals
- Multi-position and multi-pole function
- RoHS compliant

Typical Applications

- Computers
- Power supplies
- Appliances
- Fitness equipment
- Off-road vehicles



Specifications

CONTACT RATING: 16 AMPS @ 125, 250 V AC; 1/4 HP @ 125 V AC; 1/2 HP @ 250 V AC; 6 AMPS @ 48 V DC, 2 AMPS @ 60 V DC, 11 AMPS @ 30 V DC

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load. INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level. OPERATING TEMPERATURE: -20°C to +85°C Materials HOUSING & ACTUATOR: 6/6 nylon (UL 94V-2), black, finish: matte.

CONTACTS: Fine silver, silver plated.


TERMINALS: Copper, silver plated.

CONTACT SPRING: Music wire or stainless steel.

NOTE: Specifications and materials listed above are for standard switches. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages G–74 thru G–76. For additional options not shown in catalog, consult Customer Service Center.

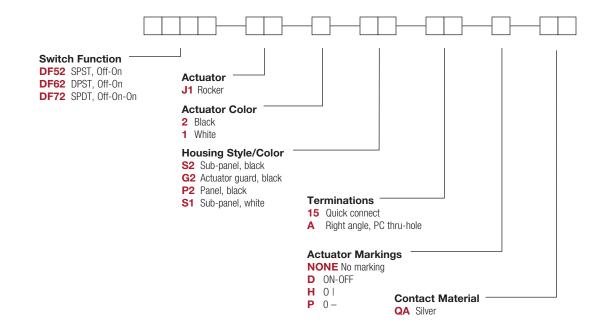






Downloaded from Arrow.com

DF Series Power Rocker Switches

SWITCH FUNCTION

		SWITCH FUNCTION		CONNECTED TERMINALS		
		POS. 1	POS. 2	POS. 1	POS. 2	
NO. POLES	MODEL NO.					SCHEMATIC
SP	DF52	OFF	ON	OPEN	1-1A	SPST 1A
DP	DF62	OFF	ON	OPEN	1-1A, 2-2A	DPST 1A 2A

Part Number shown DF62J12S215QA

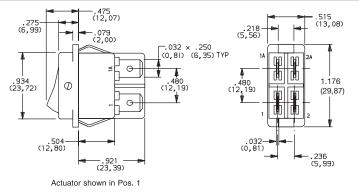


NO. POLES	MODEL NO.	POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	SCHEMATIC
SP	DF72	OFF	ON	ON	OPEN	1 / 2-2A	1 / 2-1A 1 / 2-2A	POS. 1 POS. 2 POS. 3 1a 2a 1a 2a 1a 2a 1 2 1 2 1 2

All models c SL us

ACTUATOR

-.275 (6,99)

J1 ROCKER



OPTION CODE	ACTUATOR COLOR
2	BLACK
1	WHITE
	•

NOTE: Actuator finish: matte. Other colors available, consult Customer Service Center.



G



Dimensions are shown: Inches (mm)


Specifications and dimensions subject to change



DF Series Power Rocker Switches


HOUSING STYLE/COLOR

S SUB-PANEL




NOTE: DF52 & DF62 models only.





NOTE: Not available with 'A' termination. Available in black only.





NOTE: Not available with 'A' termination. Available in black only.

OPTION CODE	HOUSING COLOR
2	(STD.) BLACK
1	WHITE

NOTE: Housing finish: matte. Other colors available, consult Customer Service Center.

PANEL MOUNTING







DF52 & DF62 Models DF52, DF62 & DF72 Models with 'S' housing style with 'P2' & 'G2' housing style

.490 - .495 (12,45 - 12,57)


TERMINATIONS

15 QUICK CONNECT







A RIGHT ANGLE, PC THRU-HOLE



Actuator shown in Pos. 1 NOTE: DF52 and DF62 Models Only



PC MOUNTING



Third Angle Projection

Dimensions are shown: Inches (mm) Specifications and dimensions subject to change





DF Series Power Rocker Switches

NONE NO MARKING D ON-OFF	H ol	P o-	
		0-	
OFF	O -	0	

NOTE: Orientation of actuator markings and terminals.

¹D, H, & P' marking options: marking color white, standard for all actuator colors except white. Marking color black, standard for white actuators. Consult Customer Service Center for other available marking colors.

CONTACT MATERIAL	
------------------	--

OPTI COE		CONTACT AND TERMINAL MATERIAL	RATINGS		
QA	4	SILVER ^{1,2}	POWER	16 AMPS @ 125, 250 V AC; 1/4 HP @ 125 V AC; 1/2 HP @ 250 V AC; 6 AMPS @ 48 V DC (UL), 2 AMPS @ 60 V DC, 11 AMPS @ 30 V DC	
			16 AMPS @ 125, 250 V AC; 1/4 HP @ 125 V AC; 1/2 HP @ 250 V AC (UL)		

All models


* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

¹ CONTACTS: Fine silver, silver plated.

² TERMINALS: Copper, silver plated.

AVAILABLE HARDWARE

Actuator Guard




PART NO. 285B02000

Material: Nylon 6/6 Finish: Matte



G



Dimensions are shown: Inches (mm) Specifications and dimensions subject to change