


# Surge protection device - TTC-6-2X1-24DC-PT - 2906805

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Surge protection for two signal wires with common reference potential, e.g., Digital IN/OUT.



## Key Commercial Data

Packing unit	1
GTIN	 4 055626 135595
GTIN	4055626135595

## Technical data

### Dimensions

Height	105.8 mm
	105.8 mm
Width	6.2 mm
Depth	69.5 mm

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20

### General

Housing material	PBT
Flammability rating according to UL 94	V-0
Color	traffic grey A RAL 7042
Mounting type	DIN rail: 35 mm
Design	Rail-mountable module, one-piece
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground

# Surge protection device - TTC-6-2X1-24DC-PT - 2906805

## Technical data

### Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage $U_N$	24 V DC
Maximum continuous voltage $U_C$	30 V DC
Rated current	600 mA (40 °C)
Operating effective current $I_C$ at $U_C$	$\leq 5 \mu\text{A}$
Residual current $I_{PE}$	$\leq 10 \mu\text{A}$
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (core-earth)	5 kA
Pulse discharge current $I_{imp}$ (10/350) $\mu\text{s}$ (core-ground)	0.5 kA
Total discharge current $I_{total}$ (8/20) $\mu\text{s}$	10 kA
Voltage protection level $U_p$ (core-ground)	$\leq 140 \text{ V}$ (C1 - 1 kV/500 A)
	$\leq 130 \text{ V}$ (C2 - 10 kV / 5 kA)
	$\leq 45 \text{ V}$ (C3 - 25 A)
	$\leq 50 \text{ V}$ (C3 - 100 A)
Voltage protection level $U_p$ static (core-ground)	$\leq 55 \text{ V}$ (C1 - 1 kV/500 A)
	$\leq 80 \text{ V}$ (C2 - 10 kV / 5 kA)
Response time $t_A$ (core-earth)	$\leq 1 \text{ ns}$
Input attenuation $a_E$ , asym.	typ. 0.3 dB ( $\leq 270 \text{ kHz}/150 \Omega$ )
Cut-off frequency $f_g$ (3 dB), asym. (PE) in 150 Ohm system	typ. 960 kHz
Capacity (core-earth)	typ. 2.2 nF
Resistance in series	1.65 $\Omega \pm 20 \%$
Surge protection fault message	None
Max. required back-up fuse	630 mA (FF)
Impulse durability (conductor-ground)	C1 - 1 kV/500 A
	C2 - 10 kV/5 kA
	C3 - 100 A
	D1 - 500 A
Pulse reset time (conductor-ground)	$\leq 300 \text{ ms}$

### Connection data

Connection method	Push-in connection
Connection method IN	Push-in connection
Connection method OUT	Push-in connection
Stripping length	8 mm
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Standards and Regulations

# Surge protection device - TTC-6-2X1-24DC-PT - 2906805

## Technical data

### Standards and Regulations


Standards/specifications	IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012
	EN 61643-21 2001 + A1:2009 + A2:2013

## Drawings


### Pictogram



### Diagram

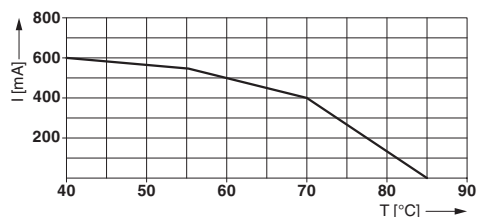

### Dimensional drawing

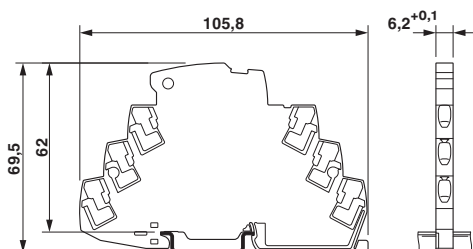

### Circuit diagram

