

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **5600201530**
Status: **Active**
Overview: DuraClik Connector System
Description: DuraClik Wire-to-Board Header, Single Row, Vertical, 15 Circuits, Gold (Au) Over Nickel, Natural

Documents:

3D Model	Product Specification PS-502351-002-001 (PDF)
Drawing (PDF)	Packaging Specification PK-560020-002-JP-001 (PDF)
Product Specification 5051510002-000 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


UL E29179

General

Product Family	PCB Headers
Series	<u>560020</u>
3D Viewer	Yes
Application	Automotive, Signal, Wire-to-Board
CURRENT-MAX-NUMERIC	3.0
Comments	The Operating Temperature Range when used with DuraClik series 502351 is -40°C to +105°C. It is -40°C to 125°C when used with DuraClik ISL series 560123 or TPA series 505151., The Operating Temperature Range when used with DuraClik series 502351 is -40°C to +105°C. It is -40°C to 125°C when used with DuraClik ISL series 560123 or TPA series 505151.
Overview	<u>DuraClik Connector System</u>
PITCH-MATING-NUMERIC	2.00
Product Name	DuraClik
UPC	887191751177

Physical

Breakaway	No
Circuits (Loaded)	15
Circuits (maximum)	15
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	SC-0
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Resin	Polyamide
Net Weight	1.609/g
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No

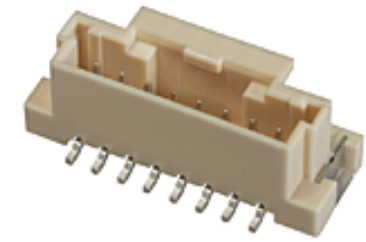

Series image - Reference only

EU ELV
Compliant

EU RoHS
Compliant

REACH SVHC
Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free
Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

560020 Series

Mates With

DuraClik Crimp Housings 502351 , 560123 , 505151

Temperature Range - Operating
Termination Interface: Style

-40° to +105°C, -40° to +125°C
Surface Mount

Electrical

Current - Maximum per Contact
Voltage - Maximum

3.0A
125V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification
Product Specification
Sales Drawing

PK-560020-002-JP-001
5051510002-000, PS-502351-002-001
SD-560020-001-001, SD-560020-003-001

This document was generated on 10/11/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[560020-1530](#)