

Temperature controllers

LED temperature controllers

For temperature sensors with limit value (AC+DC)

Codix 564



The temperature controller Codix 564 displays temperature values in high resolution. In addition it can monitor and control 2 limit values. All current temperature sensors, such as thermocouple types B, E, J, K, N, R, S and T, as well as mV inputs, Pt100 and resistance inputs, can be connected to the device.

These fast displays set new standards when it comes to user friendliness. Their easy-to-read 14-segment LED display, easy-to-understand running help texts and a practical quick-start guide eliminate the need to wade through time-consuming full instruction manuals.

With optional analogue output.

DC 10 ... 30 V	AC 100 ... 240 V	A..Z* 6 LEDs	Prog	mV, Ω		2, 3, 4	min / max	2	AC/DC	15 bit
Power supply	14-segment LED display	Menu-driven programming	Display linearization	Temperature input	2-, 3-, 4-wire technology	Min / Max value detection	2 limit values	Galvanic isolation	Resolution	
-20° + 65°	DIN 96 x 48	Installation in mosaic systems	Operation with gloves	mA, V						
Temperature range	DIN front bezel	Installation in mosaic systems	Operation with gloves	Analogue output optional						

User-friendly

- Practical quick-start guide for setting the parameters and operating the device
- Help text as running text
- Easy-to-read 14-segment LED, 6-digit display, 14 mm high
- Simple programming via 4 keys on the front
- One front key as well as 2 additional inputs can be programmed for specific applications
- Characteristic curves for thermocouples and RTD permanently stored
- MIN/MAX memory function, individually resettable

Powerful

- Sampling rate of 10 readings per second
- Customised linearization via 12 control points
- 2 relay outputs (changeover contacts) for limit monitoring with hysteresis and ON/OFF delay function
- Analogue output for the current measured value, MIN-value, MAX-value
- Auxiliary sensor power supply with AC version
- Inputs and outputs galvanically isolated
- Digital filter (first-order) for smoothing display fluctuations with unstable input signals

Order code

6.56 | 4 | . | 0 | 1 | 0 | . | X | 0 | X |

a Input type
4 = Temperature signal input¹⁾

Delivery specification:

- Process device
- Mounting clip
- Gasket
- Instruction manual, multilingual
- 1 sheet of self-adhesive symbols
- Quick-start guide

Practical quick-start guide for setting the parameters and operating the device.

The guide can be affixed directly to the front of the unit and can be removed and re-applied as required.

b Outputs
0 = relays¹⁾



c Power supply
0 = 100 ... 240 V AC, ± 10%¹⁾
3 = 10 ... 30 V DC¹⁾

¹⁾ Stock types

d Further outputs (optional)
0 = none¹⁾
9 = analogue output¹⁾
(only for DC version)

¹⁾ Stock types

Accessories

Dimensions in mm [inch]

Order-No.

Mounting frame

with cut-out 92 x 45 [3.62 x 1.77]

For snap-on mounting on 35 [1.38] top-hat DIN rail,
for counters 96 x 48 [3.74 x 1.89]

grey

G300005

Suitable gaskets as well as further accessories can be found in the accessories section or in the accessories area of our website at www.kuebler.com/accessories.

Temperature controllers

LED temperature controllers

For temperature sensors with limit value (AC+DC)

Codix 564

Technical data

General technical data

Display	6-digit, 14 segment LED
Digit height	14 mm [0.55"]
Display range	-199999 ... 999999, with leading zero blanking
Data retention	> 10 years, EEPROM
Operation	5 keys
Operating temperature (non-condensing)	-20°C ... +65°C [-4°F ... +149°F]
Storage temperature	-25°C ... +75°C [-13°F ... +167°F]
Relative humidity (non-condensing)	R.H. 93 % at +40°C [+104°F]
Altitude	up to 2000 m [6562']

Electrical characteristics

Power supply	AC supply	100 ... 240 V AC / max. 9 VA, 50 / 60 Hz, tolerance ±10% ext. fuse protection: T 0.1 A
	DC supply	10 ... 30 V DC / max. 3.8 W with galvanic isolation and reverse polarity protection ext. fuse protection: T 0.4 A
Mains hum suppression (programmable)		50 Hz or 60 Hz
Sensor power supply		24 V DC ±15 %, 30 mA
EMC	Emitted interference Immunity to interference	EN 55011 class B EN 61000-6-2 with shielded signal and control cables
Device safety	Designed to Protection class Application area Overvoltage category	EN 61010 part 1 2 (front side) Pollution level 2 II
UL approval	File No.: E128604	

Mechanical characteristics

Housing	Panel mount housing to DIN 43700 RAL 7021
Dimensions	96 x 48 x 102 mm [3.78 x 1.89 x 4.02"]
Panel cut-out	92 +0.8 x 45 +0.6 mm [3.62 +0.032 x 1.77 +0.024"]
Installation depth	approx. 92 mm [3.62"] incl. terminals
Weight	approx. 180 g [6.34 oz] 200 g [7.06 oz]
Protection	IP65 (front side)
Housing material	Polycarbonate UL94 V-2
Vibration resistance	acc. to EN 60068-2-6 10 - 55 Hz / 1 mm / XYZ 30 min in each direction
Shock resistance	acc. to EN 60068-2-27 100G / XYZ 3 times in each direction acc. to EN 60068-2-29 10G / 6 ms / XYZ 2000 times in each direction

Connections

Power supply and outputs	Plug-in screw terminal, 8-pin, RM 5.00, core ø max. 2.5 mm ² [AWG 13]
Signal and control inputs	Plug-in screw terminal, 9-pin, RM 3.50, core ø max. 1.5 mm ² [AWG 15]

Measuring signal inputs

Sampling rate	10 readings/sec
Temperature drift	< 100 ppm/K
Input Thermocouple	
thermocouple:	range: accuracy at 23°C [73.4°F]:
type B	+250°C ... 1820°C [+482°F ... 3308°F] typ. 1.0°C, max. 2.0°C
E	-200°C ... +1000°C [-328°F ... +1832°F] typ. 0.2°C, max. 0.5°C
J	-210°C ... +1200°C [-346°F ... +2192°F] typ. 0.2°C, max. 0.5°C
K	-200°C ... 499.9°C [-328°F ... +931.82°F] -500°C ... +1372°C [-868°F ... 2502°F] typ. 0.6°C, max. 1.0°C
N	-200°C ... +1300°C [-328°F ... 2372°F] typ. 0.3°C, max. 0.7°C
R	-50°C ... +1768°C [-58°F ... +3214°F] typ. 1.0°C, max. 2.0°C
S	-50°C ... +1768°C [-58°F ... +3214°F] typ. 1.0°C, max. 2.0°C
T	-200°C ... +400°C [-328°F ... +752°F] typ. 0.2°C, max. 0.5°C
Resolution J, K, T, E, N	1 or 0.1°C/F
Resolution S, R, B	1°C/F
Reference point	internal or external constant
Reference point accuracy	≤ ±1°C
Input mV	
Measuring range	± 105 mV (resolution ±15 bit)
Measuring accuracy at 23°C [73.4°F] (% of range)	typ. 0.02 / max. ≤ 0.05
Input resistance	> 2 MΩ
Input Pt100	
Measuring range	-200°C ... +850°C [-328°F ... +1562°F]
Resolution	1 or 0.1°C / F
Measuring accuracy at 23°C [73.4°F]	typ. 0.3°C, max. ≤ 0.6°C
Measuring current	200 µA
Connection	2-, 3-, 4-wire
Lead wire resistance	max. 25 Ω per wire
Input 500 Ω	
Measuring range	0 ... 525 Ω (resolution ±15 bit)
Measuring accuracy at 23°C [73.4°F]	typ. 0.1 Ω, max. ≤ 0.2 Ω
Measuring current	200 µA
Connection	2-, 3-, 4-wire
Lead wire resistance	max. 25 Ω per wire

Temperature controllers

LED temperature controllers

For temperature sensors with limit value (AC+DC)


Codix 564

Alarm outputs	
Relays	changeover contacts
Switching voltage	max. 250 V AC / 125 V DC min. 5 V AC / 5 V DC
Switching current	max. 5 A AC / 5 A DC min. 10 mA DC
Switching capacity	max. 1250 VA / 150 W
Pull-in time	approx. 10 ms


Control inputs MPI 1 / MPI 2	
Quantity	2 optocouplers
Function	programmable
Switching levels	LOW < 2 V HIGH > 4 V (max. 30 V)
Pulse length	> 100 ms

Analogue output (optional - only for DC version)	
Output ranges	0 (4) ... 20 mA / 0 (2) ... 10 V
Load	current output $\leq 500 \Omega$ voltage output $\geq 2000 \Omega$
Resolution	15 bit
Update time (basic device measuring rate)	100 ms
Temperature drift	$\leq 100 \text{ ppm/K}$
Accuracy	$\pm 0.1\%$ of the output range high value
Output ripple	$\leq 10 \text{ mV}$
Isolation voltage	500 V AC for 1 minute or 1 kV DC for 1 second

Terminal assignment

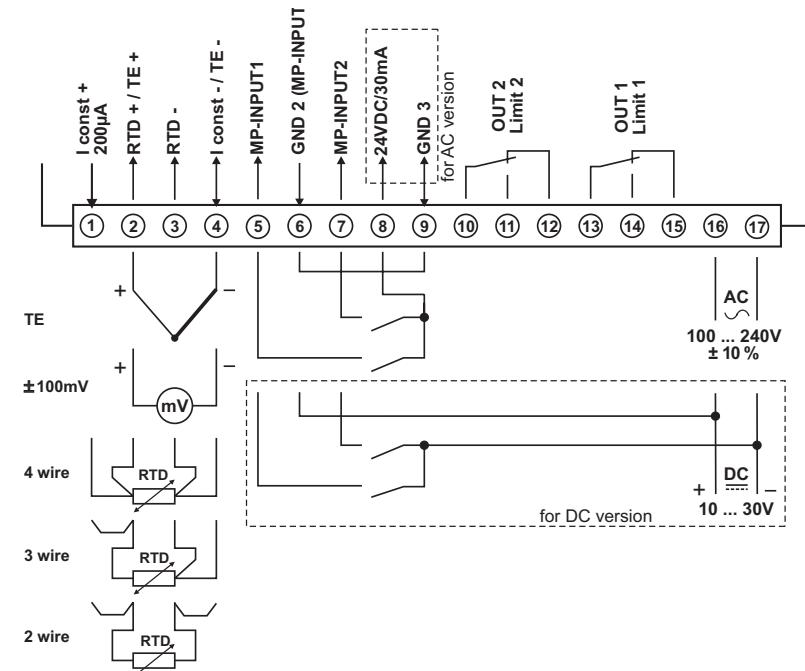

Rear side view

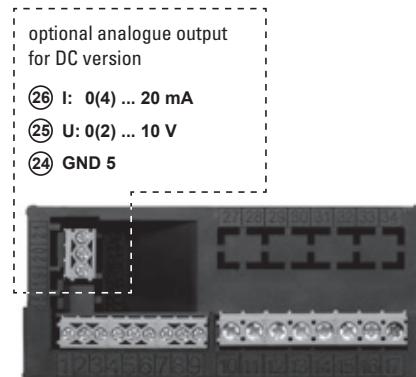


Temperature controllers

LED temperature controllers

For temperature sensors with limit value (AC+DC)

Codix 564

Block diagram

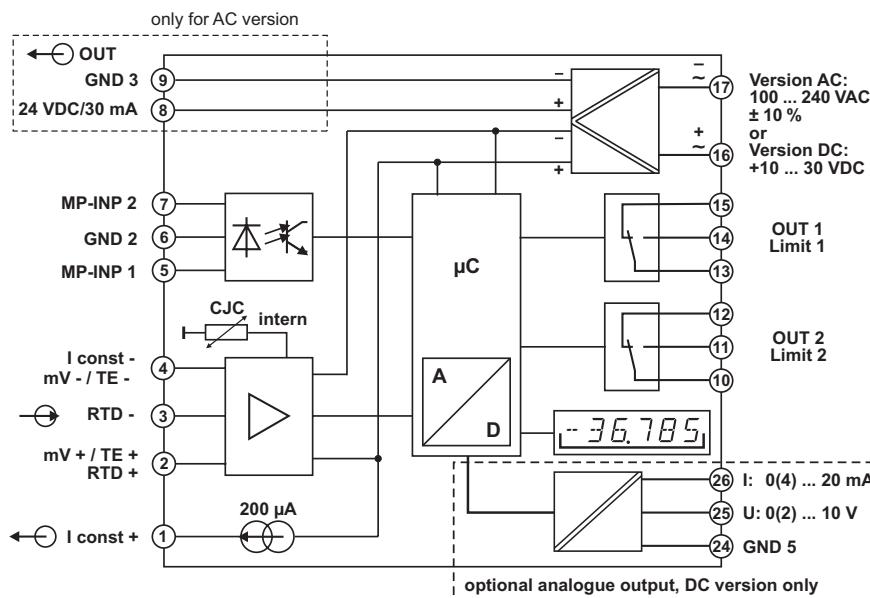

Dimensions

Dimensions in mm [inch]

Panel cut-out
92^{+0.8} x 45^{+0.6}
[3.62^{+0.032} x 1.77^{+0.024}]

