


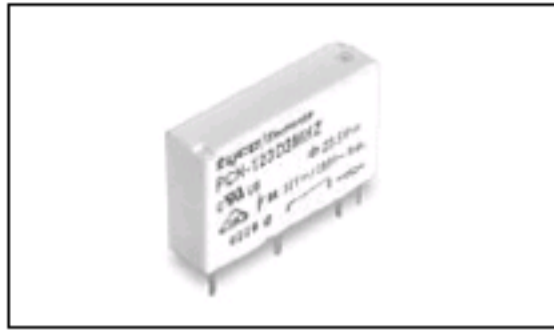

## PCN-124D3MHZ,000 Product Details

[Share](#) [Print](#) [Email](#)


PCN-124D3MHZ,000

TE Internal Number: 3-1461491-6

Active

[View 3D PDF](#)

### Industrial Relays (General Purpose)

[Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Relay Type = Slim
- Relay Style = General
- PCN Series
- Contact - Arrangement = 1 Form A, SPST-NO, 1 N/O
- Contact - Rated Current = 3 A

[View all Features](#)

#### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [PCN D3M CUSTOMER DRAWING](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version F)
- [3D Model](#) (IGES, Version F)
- [3D Model](#) (STEP, Version F)

#### Additional Information:

- [Product Line Information](#)

#### Additional Product Images:

- [Product Photo](#)
- [Wiring Diagram](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [Series](#) = PCN
- Termination Type = Through Hole

#### Electrical Characteristics:

- [Contact - Rated Current \(A\)](#) = 3
- [Coil - Resistance \( \$\Omega\$ \)](#) = 4800
- [Coil - Rated Power, DC \(mW\)](#) = 120
- Actuating System = DC
- Input Voltage (VDC) = 24
- Insulation - Special Features = None
- Coil Rating = Sensitive

#### Contact Features:

- Relay Type = Slim
- [Mounting Options](#) = PC Board
- Enclosure Type = Sealed
- Contact Base Material = Silver Nickel Alloy
- Approx. Dimensions (L x W x H) (mm [in]) = 20.06 x 5.00 x 12.50 [.790 x .197 x .492]
- Contact Configuration = Bifurcated

#### Configuration Features:

- Relay Style = General
- [Contact - Arrangement](#) = 1 Form A, SPST-NO, 1 N/O
- [Coil - Magnetic System](#) = Monostable
- Coil Suppression Diode = Without
- Coil Selection Criteria = Nominal Voltage
- Coil Latching = Without
- Status Indicator = None

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive
- Approved Standards = VDE Component Mark, UL Listed

#### Other:

- Brand = OEG

#### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

#### Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference Products](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

#### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

#### Keep Me Informed

Receive TE News, Events & Technology Updates

