



PRODUCT NUMBER SEE TABLE

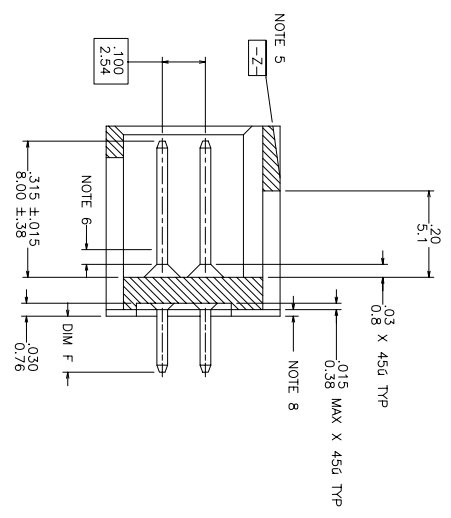

SECTION H-H

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101	INCH/MM	HEADER
NOTE 1 & 3					
ltr	ecn	no	dr	date	tolerances unless otherwise specified
B	V00853	MRC	9/18/90	angles	XXXL01/XXL03
C	V70775	SAR	6/2/97	lineor	XXXL005/XXL013
D	V71034	EPK	9/24/97	0 ±.2°	XXXL000/XXXL051
E	V01576	MDF	7/5/00	dr	M. CORNMANN
F	M05-0167	ERE	7/23/05	engr	M. LEACH
G	M07-0116	ACS	2/24/07	chr	M. LEACH
H	N07-0150	MHI	8/01/07	pppd	M. LEACH
sheet	revision	H	H	H	H
index	sheet	1	2	3	4

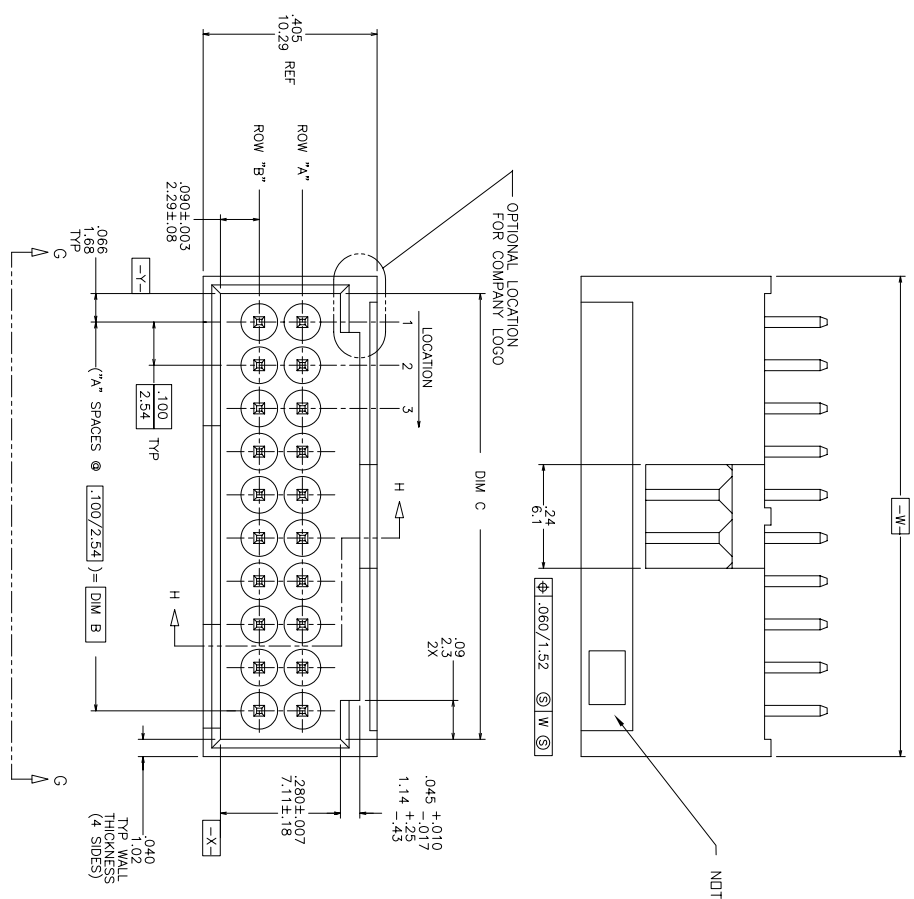


title	product family
STRAIGHT HEADER FOR ROUND WIRE RECEPTACLE	HEADER
dwg no	sheet 1 of 6 size
68664	A3
type	Product Customer Drawing

form: A3 1 2 3 4 5 6

PRODUCT NO.
SEE TABLE

.020 X 45°CHAM.TYP
0.51

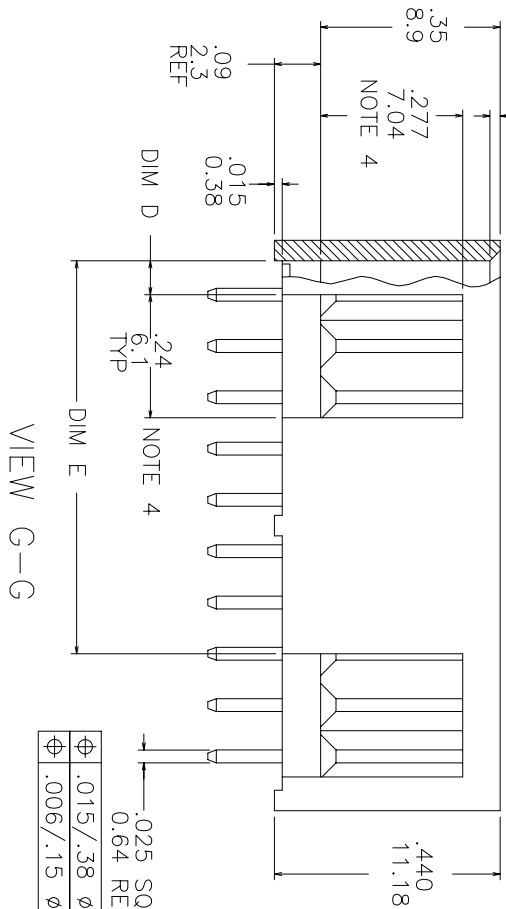

VIEW G-G

⊕	.015/.38 ⌀	(M)	X	(M)	Y	(M)	AT TIPS,TYP
⊕	.006/.15 ⌀	(M)	X	(M)	Y	(M)	AT BASE,TYP

NOTES:

1. TERMINAL MATERIAL: 3/4 HARD PHOS. BRONZE ALLOY, UNS-C51000.
2. TERMINAL PLATING: 30u" / 0.76u Au OR GXT OVER 50u" / 1.27u Ni PLATING ON SWAGED TIPS MANUFACTURERS OPTION.
3. MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0. COLOR: BLACK.
4. .020/.51 MAX FLASH AROUND ALL WINDOWS.
5. COMPANY LOGO MOLDED IN ON DATUM SURFACE -Z- APPROX. AS SHOWN.
6. .030/.76 MAX FLASH PERMISSIBLE ON THIS END OF PINS.
7. OTHER PLATINGS ARE AVAILABLE ON 68663, 68665, AND 68666.
8. .015/.38 MAX FLASH PERMISSIBLE ON THIS END OF PINS.
9. PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
10. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION
11. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code	NOTE 1 & 3	surface	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	ISO 1101	INCH/MM	HEADER
tolerances unless otherwise specified				scale: 2.5:1	title
angles	inlead	XXX.XXX/XXX.03	XXX.XXX/XXX.03		STRAIGHT HEADER FOR
0° ± 2°					ROUND WIRE RECEPTACLE
dr	M. CORNUMAN	9/18/90			dwg no
engr	M. LEACH	9/18/90			68664
chr	M. LEACH	9/18/90			sheet 2 of 6
pppd	M. LEACH	9/18/90			size
sheet	revision				A3
index	sheet				Product Customer Drawing

1 2 3 4 5 6

PRODUCT NO NOTE 10	NO OF POS	NO OF PINS	A SPACES	DIM [B]	DIM C ± .005 ±0.13	DIM D ± .005 ±0.13	DIM E ± .005 ±0.13	DIM F	POL. POS.	
									ROW A	ROW B
68664-001	6	6	2	.200/5.08	.332/8.43	.066/1.68		.130/3.30		
-002	8	8	3	.300/7.62	.432/10.97	.066/1.68				
-003	10	10	4	.400/10.16	.532/13.52	.166/4.22				
-004	12	12	5	.500/12.70	.632/16.05	.166/4.22				
-005	14	14	6	.600/15.24	.732/18.59	.266/6.76				
-006	16	16	7	.700/17.78	.832/21.13	.266/6.76				
-007	18	18	8	.800/20.32	.932/23.67	.366/9.30				
-008	20	20	9	.900/22.86	1.032/26.21	.466/11.84				
-009	22	22	10	1.000/25.40	1.132/28.75	.566/14.38				
-010	24	24	11	1.100/27.94	1.232/31.29	.666/16.92				
-011	26	26	12	1.200/30.48	1.332/33.83	.766/19.46				
-012	28	28	13	1.300/33.02	1.432/36.37	.866/22.00				
-013	30	30	14	1.400/35.56	1.532/38.91	.966/24.54				
-014	32	32	15	1.500/38.10	1.632/41.45	1.066/27.08				
-015	34	34	16	1.600/40.64	1.732/43.99	1.166/29.62				
-016	36	36	17	1.700/43.18	1.832/46.53	1.266/32.16				
-017	38	38	18	1.800/45.72	1.932/49.07	1.366/34.70				
-018	40	40	19	1.900/48.26	2.032/51.61	1.466/37.24				
-019	42	42	20	2.000/50.80	2.132/54.15	1.566/39.78				
-020	44	44	21	2.100/53.34	2.232/56.69	1.666/42.32				
-021	46	46	22	2.200/55.88	2.332/59.23	1.766/44.86				
-022	48	48	23	2.300/58.42	2.432/61.77	1.866/47.40				
-023	50	50	24	2.400/60.96	2.532/64.31	1.966/49.94				
-024	52	52	25	2.500/63.50	2.632/66.85	2.066/52.48				
-025	54	54	26	2.600/66.04	2.732/69.39	2.166/55.02				
-026	56	56	27	2.700/68.58	2.832/71.93	2.266/57.56				
-027	58	58	28	2.800/71.12	2.932/74.47	2.366/60.10				
-028	60	60	29	2.900/73.66	3.032/77.01	2.466/62.64				
-029	62	62	30	3.000/76.20	3.132/79.55	2.566/65.18				
-030	64	64	31	3.100/78.74	3.232/82.09	2.666/67.72				
-031	66	66	32	3.200/81.28	3.332/84.63	2.766/70.26				
-032	68	68	33	3.300/83.82	3.432/87.17	2.866/72.80				
-033	70	70	34	3.400/86.36	3.532/89.71	2.966/75.34				
68664-034	72	72	35	3.500/88.90	3.632/92.25	3.066/77.88				

mat'l. code	surface	tolerance	projection	product family
NOTE 1 & 3	ISO 1302	ISO 406	ISO 1101	HEADER
lit ecn no dr date	tolerances unless otherwise specified			title
H	angles	linear	INCH/MM	STRAIGHT HEADER FOR
	0° ± 2°	XXXX.005/XXXX.03	scale 2.5:1	ROUND WIRE RECEPTACLE
	dr	M. CORNUMAN		dwg no
	engr	M. LEACH		68664
	chr	M. LEACH		Sheet 3 of 6 size
	pppd	M. LEACH		A3
sheet	revision			type
index	sheet			Product Customer Drawing

Copyright FCI FCIconnect.com

Form: A3

1 2 3 4 5 6

FCI

Product Family: HEADER

Product: STRAIGHT HEADER FOR ROUND WIRE RECEPTACLE

Dwg No: 68664

Sheet 3 of 6 size A3

Type: Product Customer Drawing

1 2 3 4 5 6

PRODUCT NO NOTE 10	NO OF POS	NO OF PINS	A SPACES	DIM [B]	DIM C ±0.05 ±0.13	DIM D ±0.05 ±0.13	DIM E ±0.05 ±0.13	DIM F .155/3.94	POL. POS.	
									ROW A	ROW B
68664-035	6	6	2	.200/5.08	.332/8.43	.066/1.68	-----	.155/3.94		
-036	8	8	3	.300/7.62	.432/10.97	.066/1.68	-----			
-037	10	10	4	.400/10.16	.532/13.52	.166/4.22	-----			
-038	12	12	5	.500/12.70	.632/16.05	.166/4.22	-----			
-039	14	14	6	.600/15.24	.732/18.59	.266/6.76	-----			
-040	16	16	7	.700/17.78	.832/21.13	.266/6.76	-----			
-041	18	18	8	.800/20.32	.932/23.67	.366/9.30	-----			
-042	20	20	9	.900/22.86	1.032/26.21	.066/1.68	.766/19.46			
-043	22	22	10	1.000/25.40	1.132/28.75		.866/22.00			
-044	24	24	11	1.100/27.94	1.232/31.29		.966/24.54			
-045	26	26	12	1.200/30.48	1.332/33.83		1.066/27.08			
-046	28	28	13	1.300/33.02	1.432/36.37		1.166/29.62			
-047	30	30	14	1.400/35.56	1.532/38.91		1.266/32.16			
-048	32	32	15	1.500/38.10	1.632/41.45		1.366/34.70			
-049	34	34	16	1.600/40.64	1.732/43.99		1.466/37.24			
-050	36	36	17	1.700/43.18	1.832/46.53		1.566/39.78			
-051	38	38	18	1.800/45.72	1.932/49.07		1.666/42.32			
-052	40	40	19	1.900/48.26	2.032/51.61		1.766/44.86			
-053	42	42	20	2.000/50.80	2.132/54.15		1.866/47.40			
-054	44	44	21	2.100/53.34	2.232/56.69		1.966/49.94			
-055	46	46	22	2.200/55.88	2.332/59.23		2.066/52.48			
-056	48	48	23	2.300/58.42	2.432/61.77		2.166/55.02			
-057	50	50	24	2.400/60.96	2.532/64.31		2.266/57.56			
-058	52	52	25	2.500/63.50	2.632/66.85		2.366/60.10			
-059	54	54	26	2.600/66.04	2.732/69.39		2.466/62.64			
-060	56	56	27	2.700/68.58	2.832/71.93		2.566/65.18			
-061	58	58	28	2.800/71.12	2.932/74.47		2.666/67.72			
-062	60	60	29	2.900/73.66	3.032/77.01		2.766/70.26			
-063	62	62	30	3.000/76.20	3.132/79.55		2.866/72.80			
-064	64	64	31	3.100/78.74	3.232/82.09		2.966/75.34			
-065	66	66	32	3.200/81.28	3.332/84.63		3.066/77.88			
-066	68	68	33	3.300/83.82	3.432/87.17		3.166/80.42			
-067	70	70	34	3.400/86.36	3.532/89.71		3.266/82.96			
68664-068	72	72	35	3.500/88.90	3.632/92.25	.066/1.68	3.366/85.50	.155/3.94		

mat'l. code		surface		tolerance		projection		product family	
NOTE 1 & 3		ISO 1302		ISO 406		INCH/MM		HEADER	
lit ecn no dr date		tolerances unless otherwise specified		ISO 1101		scale 2.5:1		title	
H		angles		XXE.01/XXH.3		INCH/MM		STRAIGHT HEADER FOR	
		line art		XXE.005/XXH.3				ROUND WIRE RECEPTACLE	
		0°±2°		XXXX-0020/XXXX0.051				dwg no	
		dr		M. CORNUMAN 9/18/90				68664	
		engr		M. LEACH 9/18/90				Sheet 4 of 6 size	
		chr		M. LEACH 9/18/90				A3	
		pppd		M. LEACH 9/18/90				type	
sheet		revision						Product Customer Drawing	
index		sheet							

form: A3 1 2 3 4 5 6

PRODUCT NO NOTE 10	NO OF POS	NO OF PINS	A SPACES	DIM [B]	DIM C ±.005 ±0.13	DIM D ±.005 ±0.13	DIM E ±.005 ±0.13	DIM F	POL. POS.	
									ROW A	ROW B
68664-069	6	6	2	.200/5.08	.332/8.43	.066/1.68	-----	.200/5.08		
-070	8	8	3	.300/7.62	.432/10.97	.066/1.68	-----			
-071	10	10	4	.400/10.16	.532/13.52	.166/4.22	-----			
-072	12	12	5	.500/12.70	.632/16.05	.166/4.22	-----			
-073	14	14	6	.600/15.24	.732/18.59	.266/6.76	-----			
-074	16	16	7	.700/17.78	.832/21.13	.266/6.76	-----			
-075	18	18	8	.800/20.32	.932/23.67	.366/9.30	-----			
-076	20	20	9	.900/22.86	1.032/26.21	.066/1.68	-----	.766/19.46		
-077	22	22	10	1.000/25.40	1.132/28.75		-----	.866/22.00		
-078	24	24	11	1.100/27.94	1.232/31.29		-----	.966/24.54		
-079	26	26	12	1.200/30.48	1.332/33.83		-----	1.066/27.08		
-080	28	28	13	1.300/33.02	1.432/36.37		-----	1.166/29.62		
-081	30	30	14	1.400/35.56	1.532/38.91		-----	1.266/32.16		
-082	32	32	15	1.500/38.10	1.632/41.45		-----	1.366/34.70		
-083	34	34	16	1.600/40.64	1.732/43.99		-----	1.466/37.24		
-084	36	36	17	1.700/43.18	1.832/46.53		-----	1.566/39.78		
-085	38	38	18	1.800/45.72	1.932/49.07		-----	1.666/42.32		
-086	40	40	19	1.900/48.26	2.032/51.61		-----	1.766/44.86		
-087	42	42	20	2.000/50.80	2.132/54.15		-----	1.866/47.40		
-088	44	44	21	2.100/53.34	2.232/56.69		-----	1.966/49.94		
-089	46	46	22	2.200/55.88	2.332/59.23		-----	2.066/52.48		
-090	48	48	23	2.300/58.42	2.432/61.77		-----	2.166/55.02		
-091	50	50	24	2.400/60.96	2.532/64.31		-----	2.266/57.56		
-092	52	52	25	2.500/63.50	2.632/66.85		-----	2.366/60.10		
-093	54	54	26	2.600/66.04	2.732/69.39		-----	2.466/62.64		
-094	56	56	27	2.700/68.58	2.832/71.93		-----	2.566/65.18		
-095	58	58	28	2.800/71.12	2.932/74.47		-----	2.666/67.72		
-096	60	60	29	2.900/73.66	3.032/77.01		-----	2.766/70.26		
-097	62	62	30	3.000/76.20	3.132/79.55		-----	2.866/72.80		
-098	64	64	31	3.100/78.74	3.232/82.09		-----	2.966/75.34		
-099	66	66	32	3.200/81.28	3.332/84.63		-----	3.066/77.88		
-100	68	68	33	3.300/83.82	3.432/87.17		-----	3.166/80.42		
-101	70	70	34	3.400/86.36	3.532/89.71		-----	3.266/82.96		
68664-102	72	72	35	3.500/88.90	3.632/92.25	.066/1.68	-----	3.366/85.50	.200/5.08	

mat'l. code		surface		tolerance		projection		product family	
NOTE 1 & 3		ISO 1302		ISO 406		ISO 1101		HEADER	
lfr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
H				0 ±.2		INCH/MM		STRAIGHT HEADER FOR	
				inlead		scale 2.5:1		ROUND WIRE RECEPTACLE	
				XXXX-005/XXXX.3				dwg no	
				XXXX-000/XXXX.051				68664	
				dr		M. CORNUMAN		9/18/90	
				engr		M. LEACH		9/18/90	
				chr		M. LEACH		9/18/90	
				pppd		M. LEACH		9/18/90	
sheet		revision		type		Product Customer Drawing			
index		sheet		type		Product Customer Drawing			

PRODUCT NO NOTE 10	NO OF POS	NO OF PINS	A SPACES	DIM [B]	DIM C ±.005 ±0.13	DIM D ±.005 ±0.13	DIM E ±.005 ±0.13	DIM F	POL. POS.	
									ROW A	ROW B
68664-103	6	6	2	.200/5.08	.332/8.43	.066/1.68	-----	.380/9.65	-----	-----
-104	8	8	3	.300/7.62	.432/10.97	.066/1.68	-----	.380/9.65	-----	-----
-105	12	12	5	.500/12.70	.632/16.05	.166/4.22	-----	.380/9.65	-----	-----
-106	16	16	7	.700/17.78	.832/21.13	.266/6.76	-----	.380/9.65	-----	-----
-107	20	20	9	.900/22.86	1.032/26.21	.066/1.68	.766/19.46	.380/9.65	-----	-----
68664-108	14	13	6	.600/15.24	.732/18.59	.266/6.76	-----	.130/3.30	1	-----
68664-132	32	32	15	1.500/38.10	1.632/41.45	.066/1.68	1.366/34.70	.325/8.26	-----	-----

mat'l. code		surface		tolergrnce		projection		product family	
NOTE 1 & 3		ISO 1302		ISO 406				HEADER	
lit ecn no l dr date		tolerances unless otherwise specified		ISO 1101				title	
H		angles		XXE.01/XXH.3		INCH/MM		STRAIGHT HEADER FOR	
		0° ±.2°		XXE.005/XXH.3		scale: 2.5:1		ROUND WIRE RECEPTACLE	
		dr		M. CORNUMAN 9/18/90				dwg no	
		engr		M. LEACH 9/18/90				68664	
		chr		M. LEACH 9/18/90				sheet 6 of 6 size	
		pppd		M. LEACH 9/18/90				A3	
sheet		revision						type	
index		sheet						Product Customer Drawing	