


# Low Rho Series

## PolySwitch Resettable PPTC

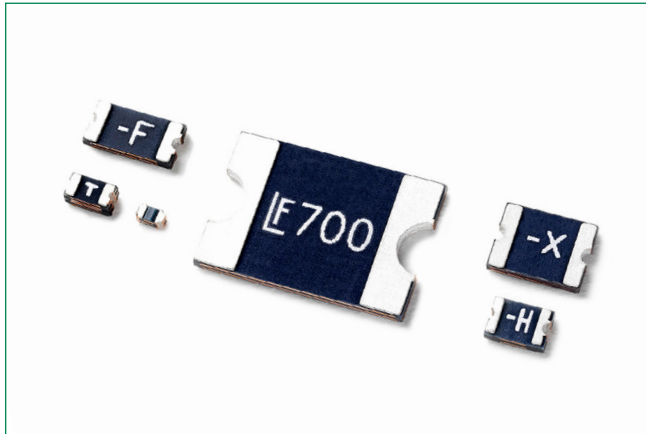

### Description

Littelfuse Low Rho Surface Mount PPTC (Polymer Positive Temperature Coefficient) devices provide overcurrent protection for applications where ultra low internal resistance, ultra low voltage drop and automatic resettable protection are desired. This new series allows a higher hold current device in a smaller factor and lower profile as compared to a standard PPTC. It offers ultra low internal resistance while maintaining the high level electrical characteristics and performances of standard PPTC products. All devices are UL recognized and TUV approved and have maximum fault current of 50A. They are available in 0402 to 2920 sizes while the hold current ranges from 100mA to 9A.

### Features & Benefits

- Ultra low internal resistance
- Very thin profile
- Miniature size saves board space
- Allows a higher hold current device in a smaller factor and lower profile as compared to a standard PPTC
- Fast response to fault currents
- Compatible with high temperature solders
- Broadest range of Hold Current ratings (100mA to 9A)
- RoHS compliant, Lead Free and Halogen Free
- UL recognized and TUV approved

### Additional Information



Resources



Accessories



Samples

### Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
|        | E183209            |
|        | R50119118          |

### Applications

- USB peripherals including new USB 3.0 / 2.0 ports
- Li-ion / Li-Polymer battery packs
- Smart phones
- Tablet and Notebook PCs
- E-readers
- LCD / LED HDTV
- Computer peripherals
- Digital cameras and video cameras
- Hard disk drives
- Game consoles



#### WARNING

- Users shall independently assess the suitability of these devices for each of their applications
- Operation of these devices beyond the stated maximum ratings could result in damage to the devices and lead to electrical arcing and/or fire
- These devices are intended to protect against the effects of temporary over-current or over-temperature conditions and are not intended to perform as protective devices where such conditions are expected to be repetitive or prolonged in duration
- Exposure to silicon-based oils, solvents, electrolytes, acids, and similar materials can adversely affect the performance of these PPTC devices
- These devices undergo thermal expansion under fault conditions, and thus shall be provided with adequate space and be protected against mechanical stresses
- Circuits with inductance may generate a voltage (L di/dt) above the rated voltage of the PPTC device.

# Low Rho Series

## PolySwitch Resettable PPTC

### Electrical Characteristics

| Part Number   | Marking | I <sub>hold</sub> (A) | I <sub>trip</sub> (A) | V <sub>max</sub> (Vdc) | I <sub>max</sub> (A) | P <sub>d</sub> typ. (W) | Maximum Time-To-Trip |             | Resistance           |                       | Agency Approvals  |   |
|---------------|---------|-----------------------|-----------------------|------------------------|----------------------|-------------------------|----------------------|-------------|----------------------|-----------------------|---|---|
|               |         |                       |                       |                        |                      |                         | Current (A)          | Time (Sec.) | R <sub>min</sub> (Ω) | R <sub>1max</sub> (Ω) |  |  |
| 0402L010SL    | -       | 0.10                  | 0.30                  | 6                      | 40                   | 0.5                     | 0.50                 | 1.00        | 0.150                | 2.000                 | X   | X   |
| 0402L020SL    | -       | 0.20                  | 0.50                  | 6                      | 40                   | 0.5                     | 1.00                 | 1.00        | 0.100                | 1.250                 | X   | X   |
| 0402L035SL    | -       | 0.35                  | 0.70                  | 6                      | 40                   | 0.5                     | 8.00                 | 0.10        | 0.050                | 0.700                 | X   | X   |
| 0402L050SL    | -       | 0.50                  | 1.00                  | 6                      | 40                   | 0.5                     | 8.00                 | 0.10        | 0.040                | 0.400                 | X   | X   |
| 0402L075SL    | -       | 0.75                  | 1.50                  | 6                      | 40                   | 0.5                     | 8.00                 | 0.10        | 0.030                | 0.300                 | X   | X   |
| 0402L100SL    | -       | 1.00                  | 2.00                  | 6                      | 40                   | 0.5                     | 8.00                 | 0.20        | 0.030                | 0.250                 | X   | X   |
| 0603L050SL    | K       | 0.50                  | 1.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.10        | 0.070                | 0.350                 | X   | X   |
| 0603L075SL    | N       | 0.75                  | 1.50                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.20        | 0.020                | 0.165                 | X   | X   |
| 0603L100SL    | S       | 1.00                  | 1.80                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.30        | 0.040                | 0.120                 | X   | X   |
| 0603L150SL    | T       | 1.50                  | 3.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.50        | 0.007                | 0.080                 | X   | X   |
| 0603L175SL    | V       | 1.75                  | 3.50                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.60        | 0.005                | 0.060                 | X   | X   |
| 0603L200SL-V  | X       | 2.00                  | 4.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 1.00        | 0.005                | 0.040                 | X   | X   |
| 0603L300SL    | Y       | 3.00                  | 6.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 5.00        | 0.003                | 0.030                 | X   | X   |
| 0805L075SL    | -G      | 0.75                  | 1.50                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.20        | 0.040                | 0.150                 | X   | X   |
| 0805L110SL    | -H      | 1.10                  | 1.80                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.30        | 0.030                | 0.120                 | X   | X   |
| 0805L150SL    | -K      | 1.50                  | 3.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.50        | 0.015                | 0.065                 | X   | X   |
| 0805L175SL    | -V      | 1.75                  | 3.50                  | 6                      | 50                   | 0.6                     | 8.00                 | 0.60        | 0.005                | 0.055                 | X   | X   |
| 0805L200SLTH  | -L      | 2.00                  | 4.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 1.00        | 0.005                | 0.045                 | X   | X   |
| 0805L260SLTH  | -S      | 2.60                  | 5.20                  | 6                      | 50                   | 0.6                     | 8.00                 | 4.00        | 0.003                | 0.035                 | X   | X   |
| 0805L300SL    | -N      | 3.00                  | 6.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 5.00        | 0.003                | 0.030                 | X   | X   |
| 0805L300SLTH  | -N      | 3.00                  | 6.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 5.00        | 0.003                | 0.030                 | X   | X   |
| 0805L350SL    | -T      | 3.50                  | 7.00                  | 6                      | 50                   | 0.6                     | 8.00                 | 5.00        | 0.003                | 0.025                 | X   | X   |
| 0805L400SL    | -Y      | 4.00                  | 9.00                  | 6                      | 50                   | 0.6                     | 20.00                | 2.00        | 0.003                | 0.018                 | X   | X   |
| 1206L075SL    | -G      | 0.75                  | 1.50                  | 6                      | 50                   | 0.8                     | 8.00                 | 0.30        | 0.017                | 0.180                 | X   | X   |
| 1206L110SL    | -H      | 1.10                  | 2.20                  | 6                      | 50                   | 0.8                     | 8.00                 | 0.30        | 0.015                | 0.100                 | X   | X   |
| 1206L150SL    | -K      | 1.50                  | 3.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 0.30        | 0.010                | 0.055                 | X   | X   |
| 1206L110/12SL | -H1     | 1.10                  | 2.20                  | 12                     | 50                   | 0.8                     | 8.00                 | 0.30        | 0.015                | 0.130                 | X   | X   |
| 1206L150/12SL | -K1     | 1.50                  | 3.00                  | 12                     | 50                   | 0.8                     | 8.00                 | 0.50        | 0.010                | 0.080                 | X   | X   |
| 1206L175SL    | -F      | 1.75                  | 3.50                  | 6                      | 50                   | 0.8                     | 8.00                 | 0.40        | 0.005                | 0.030                 | X   | X   |
| 1206L200SL    | -L      | 2.00                  | 4.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 0.50        | 0.005                | 0.025                 | X   | X   |
| 1206L260SLTH  | -S      | 2.60                  | 5.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 4.00        | 0.003                | 0.026                 | X   | X   |
| 1206L260/12SL | -S1     | 2.60                  | 5.00                  | 12                     | 50                   | 0.8                     | 8.00                 | 4.00        | 0.003                | 0.055                 | X   | X   |
| 1206L300SLTH  | -N      | 3.00                  | 6.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 4.00        | 0.003                | 0.020                 | X   | X   |
| 1206L300/12SL | -N1     | 3.00                  | 6.00                  | 12                     | 50                   | 0.8                     | 8.00                 | 4.00        | 0.003                | 0.030                 | X   | X   |
| 1206L350SLTH  | -T      | 3.50                  | 7.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 5.00        | 0.003                | 0.018                 | X   | X   |
| 1206L350/12SL | CT      | 3.50                  | 7.00                  | 12                     | 50                   | 0.8                     | 8.00                 | 5.00        | 0.003                | 0.020                 | X   | X   |
| 1206L380SLTH* | -V      | 2.82*                 | 8.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 5.00        | 0.002                | 0.014                 | X   | X   |
| 1206L400SL    | -Y      | 4.00                  | 8.00                  | 6                      | 50                   | 0.8                     | 20.00                | 2.00        | 0.001                | 0.016                 | X   | X   |
| 1206L400/12SL | CY      | 4.00                  | 8.00                  | 12                     | 50                   | 0.8                     | 20.00                | 2.00        | 0.003                | 0.016                 | X   | X   |
| 1206L450SL    | -Z      | 4.50                  | 9.00                  | 6                      | 50                   | 0.8                     | 22.50                | 2.00        | 0.001                | 0.014                 | X   | X   |
| 1206L450/12SL | CZ      | 4.50                  | 9.00                  | 12                     | 50                   | 1.0                     | 22.50                | 2.00        | 0.003                | 0.014                 | X   | X   |
| 1206L500SL-V  | -M      | 5.00                  | 10.00                 | 6                      | 50                   | 1.0                     | 25.00                | 2.00        | 0.001                | 0.012                 | X   | X   |
| 1206L500/12SL | CM      | 5.00                  | 10.00                 | 12                     | 50                   | 1.0                     | 25.00                | 2.00        | 0.001                | 0.012                 | X   | X   |
| 1206L600SL    | -W      | 6.00                  | 12.00                 | 6                      | 50                   | 1.0                     | 30.00                | 2.00        | 0.001                | 0.010                 | X   | X   |
| 1210L175SL    | -J      | 1.75                  | 3.50                  | 6                      | 50                   | 0.8                     | 8.00                 | 2.50        | 0.006                | 0.040                 | X   | X   |
| 1210L200SL    | -L      | 2.00                  | 4.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 3.00        | 0.005                | 0.024                 | X   | X   |
| 1210L260SL    | -S      | 2.60                  | 5.00                  | 6                      | 50                   | 0.8                     | 8.00                 | 4.00        | 0.003                | 0.020                 | X   | X   |
| 1210L300SL    | -N      | 3.00                  | 6.00                  | 6                      | 50                   | 0.8                     | 15.00                | 2.00        | 0.003                | 0.020                 | X   | X   |
| 1210L350SL    | -T      | 3.50                  | 7.00                  | 6                      | 50                   | 0.8                     | 17.50                | 2.00        | 0.003                | 0.018                 | X   | X   |
| 1210L380SL    | -X      | 3.80                  | 8.00                  | 6                      | 50                   | 1.0                     | 8.00                 | 5.00        | 0.002                | 0.016                 | X   | X   |
| 1210L400SL    | -V      | 4.00                  | 8.00                  | 6                      | 50                   | 1.0                     | 8.00                 | 5.00        | 0.001                | 0.014                 | X   | X   |
| 1210L450SL    | -Y      | 4.50                  | 9.00                  | 6                      | 50                   | 1.0                     | 22.50                | 2.00        | 0.001                | 0.014                 | X   | X   |
| 1210L450/12SL | CY      | 4.50                  | 9.00                  | 12                     | 50                   | 1.2                     | 22.50                | 2.00        | 0.001                | 0.014                 | Pending   | Pending   |
| 1210L500SL    | -M      | 5.00                  | 10.00                 | 6                      | 50                   | 1.2                     | 25.00                | 2.00        | 0.001                | 0.012                 | X   | X   |
| 1210L500/12SL | CM      | 5.00                  | 10.00                 | 12                     | 50                   | 1.2                     | 25.00                | 2.00        | 0.001                | 0.012                 | X   | X   |
| 1210L550SL    | -R      | 5.50                  | 11.00                 | 6                      | 50                   | 1.2                     | 27.50                | 2.00        | 0.001                | 0.011                 | X   | X   |
| 1210L600SL    | -W      | 6.00                  | 12.00                 | 6                      | 50                   | 1.2                     | 30.00                | 2.00        | 0.001                | 0.010                 | X   | X   |
| 1210L900SL    | -Z      | 9.00                  | 18.00                 | 6                      | 50                   | 1.4                     | 45.00                | 2.00        | 0.001                | 0.0055                | X   | X   |
| 1812L190SL    | LF-19   | 1.90                  | 4.90                  | 6                      | 50                   | 1.0                     | 9.50                 | 4.50        | 0.003                | 0.025                 | X   | X   |
| 1812L260SL    | LF-26   | 2.60                  | 6.00                  | 6                      | 50                   | 1.0                     | 13.00                | 2.00        | 0.003                | 0.024                 | X   | X   |
| 1812L270SL    | LF-27   | 2.70                  | 6.20                  | 6                      | 50                   | 1.0                     | 13.50                | 2.00        | 0.003                | 0.022                 | X   | X   |
| 1812L300SL    | LF-30   | 3.00                  | 7.00                  | 6                      | 50                   | 1.0                     | 8.00                 | 5.00        | 0.003                | 0.021                 | X   | X   |
| 1812L300/24SL | LF 30J  | 3.00                  | 6.00                  | 24                     | 50                   | 2.0                     | 15.00                | 2.00        | 0.001                | 0.030                 | X   | X   |
| 1812L350SL**  | LF-35   | 3.50                  | 8.10                  | 6                      | 50                   | 1.0                     | 8.00                 | 5.00        | 0.003                | 0.020**               | X   | X   |
| 1812L370SL    | LF-37   | 3.70                  | 9.10                  | 6                      | 50                   | 1.0                     | 18.50                | 2.00        | 0.003                | 0.018                 | X   | X   |
| 2920L500/24SL | LF 50J  | 5.00                  | 10.00                 | 24                     | 50                   | 2.2                     | 25.00                | 2.00        | 0.001                | 0.018                 | X   | X   |
| 2920L600/24SL | LF 60J  | 6.00                  | 12.00                 | 24                     | 50                   | 2.5                     | 30.00                | 2.00        | 0.001                | 0.012                 | X   | X   |
| 2920L700SL*** | LF700   | 7.00                  | 14.00                 | 6                      | 50                   | 2.2                     | 35.00                | 2.0         | 0.001                | 0.007                 | X   | X   |
| 2920L700/24SL | LF 70J  | 7.00                  | 14.00                 | 24                     | 50                   | 2.5                     | 35.00                | 2.00        | 0.001                | 0.010                 | X   | X   |

Notes: 0805L150SL and 1206L150SL are ideal for overcurrent protection in VBUS of USB 3.0 / USB 2.0 ports.

\* 1206L380SLTH has I<sub>hold</sub> 2.82A for at least 15min @ 55°C. It is ideal for overcurrent protection in Li-ion / Li-Polymer battery packs of smartphones.

\*\* 1812L350SL Typical Time-To-Trip is 50A at 0.013-0.020 seconds. R1min=0.015ohm (resistance range 0.015-0.025ohm).

\*\*\* 2920L700SL is ideal for overcurrent protection in Li-ion / Li-Polymer battery packs of tablet PC.



# Low Rho Series

## PolySwitch Resettable PPTC

### Temperature Derating


| Part Number   | Ambient Operation Temperature |       |       |      |      |      |      |      |
|---------------|-------------------------------|-------|-------|------|------|------|------|------|
|               | -40°C                         | -20°C | 0°C   | 20°C | 40°C | 60°C | 70°C | 85°C |
|               | Hold Current (A)              |       |       |      |      |      |      |      |
| 0402L010SL    | 0.14                          | 0.13  | 0.11  | 0.10 | 0.09 | 0.07 | 0.06 | 0.05 |
| 0402L020SL    | 0.29                          | 0.26  | 0.23  | 0.20 | 0.18 | 0.15 | 0.13 | 0.09 |
| 0402L035SL    | 0.50                          | 0.45  | 0.40  | 0.35 | 0.31 | 0.26 | 0.22 | 0.16 |
| 0402L050SL    | 0.71                          | 0.64  | 0.57  | 0.50 | 0.44 | 0.37 | 0.31 | 0.23 |
| 0402L075SL    | 1.05                          | 0.95  | 0.85  | 0.75 | 0.65 | 0.55 | 0.45 | 0.30 |
| 0402L100SL    | 1.40                          | 1.25  | 1.10  | 1.00 | 0.85 | 0.70 | 0.60 | 0.40 |
| 0603L050SL    | 0.81                          | 0.71  | 0.62  | 0.50 | 0.41 | 0.30 | 0.24 | 0.16 |
| 0603L075SL    | 1.23                          | 1.08  | 0.94  | 0.75 | 0.61 | 0.45 | 0.36 | 0.23 |
| 0603L100SL    | 1.35                          | 1.25  | 1.10  | 1.00 | 0.82 | 0.65 | 0.52 | 0.35 |
| 0603L150SL    | 2.40                          | 2.10  | 1.80  | 1.50 | 1.25 | 0.95 | 0.80 | 0.50 |
| 0603L175SL    | 2.50                          | 2.25  | 2.00  | 1.75 | 1.55 | 1.30 | 1.10 | 0.80 |
| 0603L200SLV   | 2.85                          | 2.60  | 2.30  | 2.00 | 1.70 | 1.45 | 1.25 | 1.05 |
| 0603L300SL    | 4.70                          | 4.15  | 3.60  | 3.00 | 2.50 | 2.00 | 1.65 | 1.20 |
| 0805L075SL    | 1.15                          | 1.00  | 0.85  | 0.75 | 0.55 | 0.40 | 0.30 | 0.20 |
| 0805L110SL    | 1.70                          | 1.50  | 1.30  | 1.10 | 0.85 | 0.60 | 0.50 | 0.30 |
| 0805L150SL    | 2.25                          | 2.00  | 1.75  | 1.50 | 1.15 | 0.85 | 0.65 | 0.45 |
| 0805L175SL    | 2.60                          | 2.30  | 2.00  | 1.75 | 1.30 | 0.95 | 0.75 | 0.50 |
| 0805L200SLTH  | 3.10                          | 2.75  | 2.40  | 2.00 | 1.65 | 1.15 | 0.95 | 0.65 |
| 0805L260SLTH  | 3.80                          | 3.30  | 2.90  | 2.60 | 2.20 | 1.75 | 1.50 | 1.05 |
| 0805L300SL    | 4.70                          | 4.15  | 3.60  | 3.00 | 2.50 | 2.00 | 1.65 | 1.20 |
| 0805L300SLTH  | 3.90                          | 3.60  | 3.30  | 3.00 | 2.60 | 2.10 | 1.90 | 1.60 |
| 0805L350SL    | 5.05                          | 4.55  | 4.00  | 3.50 | 3.00 | 2.55 | 2.25 | 1.90 |
| 0805L400SL    | 5.80                          | 5.20  | 4.60  | 4.00 | 3.40 | 3.00 | 2.60 | 2.20 |
| 1206L075SL    | 1.30                          | 1.13  | 0.92  | 0.75 | 0.58 | 0.38 | 0.31 | 0.14 |
| 1206L110SL    | 1.90                          | 1.65  | 1.35  | 1.10 | 0.85 | 0.55 | 0.45 | 0.20 |
| 1206L150SL    | 2.65                          | 2.30  | 1.90  | 1.50 | 1.15 | 0.70 | 0.50 | 0.25 |
| 1206L110/12SL | 1.65                          | 1.45  | 1.30  | 1.10 | 0.85 | 0.65 | 0.55 | 0.30 |
| 1206L150/12SL | 2.25                          | 2.00  | 1.80  | 1.50 | 1.20 | 0.90 | 0.75 | 0.55 |
| 1206L175SL    | 2.60                          | 2.45  | 2.00  | 1.75 | 1.35 | 1.05 | 0.90 | 0.60 |
| 1206L200SL    | 2.95                          | 2.80  | 2.30  | 2.00 | 1.55 | 1.20 | 1.00 | 0.70 |
| 1206L260SLTH  | 4.05                          | 3.60  | 3.12  | 2.60 | 2.15 | 1.70 | 1.40 | 1.00 |
| 1206L260/12SL | 3.70                          | 3.40  | 3.00  | 2.60 | 2.20 | 1.75 | 1.55 | 1.05 |
| 1206L300SLTH  | 4.70                          | 4.15  | 3.60  | 3.00 | 2.50 | 2.00 | 1.65 | 1.20 |
| 1206L300/12SL | 4.25                          | 3.90  | 3.45  | 3.00 | 2.50 | 2.00 | 1.75 | 1.20 |
| 1206L350SLTH  | 5.50                          | 4.85  | 4.15  | 3.50 | 2.85 | 2.25 | 1.90 | 1.40 |
| 1206L350/12SL | 5.25                          | 4.65  | 4.20  | 3.50 | 2.80 | 2.10 | 1.75 | 1.25 |
| 1206L380SLTH  | 5.59                          | 5.05  | 4.48  | 3.80 | 3.23 | 2.70 | 2.17 | 1.98 |
| 1206L400SL    | 5.75                          | 5.25  | 4.65  | 4.00 | 3.40 | 2.75 | 2.40 | 1.65 |
| 1206L400/12SL | 6.00                          | 5.30  | 4.80  | 4.00 | 3.20 | 2.40 | 2.00 | 1.40 |
| 1206L450SL    | 6.50                          | 5.95  | 5.25  | 4.50 | 3.85 | 3.10 | 2.70 | 1.90 |
| 1206L450/12SL | 6.75                          | 5.95  | 5.40  | 4.50 | 3.60 | 2.70 | 2.25 | 1.60 |
| 1206L500SLV   | 7.20                          | 6.50  | 5.85  | 5.00 | 4.45 | 3.75 | 3.40 | 2.85 |
| 1206L500/12SL | 7.20                          | 6.60  | 5.80  | 5.00 | 4.25 | 3.40 | 3.00 | 2.10 |
| 1206L600SL    | 8.65                          | 7.80  | 7.00  | 6.00 | 5.30 | 4.50 | 4.05 | 3.40 |
| 1210L175SL    | 2.65                          | 2.30  | 2.05  | 1.75 | 1.40 | 1.05 | 0.90 | 0.60 |
| 1210L200SL    | 3.30                          | 2.80  | 2.40  | 2.00 | 1.90 | 1.60 | 1.40 | 1.00 |
| 1210L260SL    | 4.20                          | 3.75  | 3.30  | 2.60 | 2.20 | 1.70 | 1.45 | 1.05 |
| 1210L300SL    | 4.70                          | 4.15  | 3.60  | 3.00 | 2.50 | 1.90 | 1.70 | 1.20 |
| 1210L350SL    | 5.00                          | 4.60  | 4.05  | 3.50 | 2.80 | 2.00 | 1.75 | 1.20 |
| 1210L380SL    | 5.70                          | 5.10  | 4.40  | 3.80 | 3.20 | 2.25 | 1.80 | 1.30 |
| 1210L400SL    | 5.70                          | 5.25  | 4.60  | 4.00 | 3.20 | 2.25 | 1.90 | 1.30 |
| 1210L450SL    | 7.15                          | 6.25  | 5.30  | 4.50 | 3.45 | 2.50 | 2.00 | 0.85 |
| 1210L450/12SL | 6.45                          | 5.85  | 5.15  | 4.50 | 3.95 | 3.30 | 3.00 | 2.45 |
| 1210L500SL    | 7.20                          | 6.50  | 5.85  | 5.00 | 4.45 | 3.75 | 3.40 | 2.85 |
| 1210L500/12SL | 7.20                          | 6.50  | 5.75  | 5.00 | 4.40 | 3.75 | 3.35 | 2.75 |
| 1210L550SL    | 8.00                          | 7.15  | 6.35  | 5.50 | 4.90 | 4.10 | 3.70 | 3.05 |
| 1210L600SL    | 8.65                          | 7.80  | 7.00  | 6.00 | 5.30 | 4.50 | 4.05 | 3.40 |
| 1210L900SL    | 13.05                         | 11.70 | 10.40 | 9.00 | 8.00 | 6.75 | 6.05 | 5.00 |
| 1812L190SL    | 2.91                          | 2.57  | 2.20  | 1.90 | 1.78 | 1.50 | 1.40 | 1.05 |
| 1812L260SL    | 4.00                          | 3.65  | 2.90  | 2.60 | 1.90 | 1.60 | 1.20 | 0.85 |
| 1812L270SL    | 3.86                          | 3.55  | 3.12  | 2.70 | 2.16 | 1.54 | 1.35 | 0.93 |
| 1812L300SL    | 4.35                          | 3.90  | 3.45  | 3.00 | 2.65 | 2.25 | 2.00 | 1.65 |
| 1812L300/24SL | 4.95                          | 4.35  | 3.75  | 3.00 | 2.45 | 1.85 | 1.55 | 1.05 |
| 1812L350SL    | 5.40                          | 4.95  | 3.90  | 3.50 | 2.60 | 2.15 | 1.65 | 1.20 |
| 1812L370SL    | 5.75                          | 5.15  | 4.35  | 3.70 | 2.85 | 2.30 | 1.90 | 1.50 |
| 2920L500/24SL | 8.20                          | 7.25  | 6.25  | 5.00 | 4.25 | 3.25 | 2.80 | 2.05 |
| 2920L600/24SL | 10.15                         | 8.90  | 7.65  | 6.00 | 5.15 | 3.90 | 3.25 | 2.35 |
| 2920L700SL    | 10.00                         | 9.20  | 8.10  | 7.00 | 5.60 | 4.00 | 3.50 | 2.40 |
| 2920L700/24SL | 11.52                         | 10.08 | 8.65  | 7.00 | 5.78 | 4.35 | 3.63 | 2.55 |

Notes: The temperature derating data is for reference only. Please contact Littelfuse technical support for detail temperature derating information.

# Low Rho Series

## PolySwitch Resettable PPTC

### Temperature Derating Curve

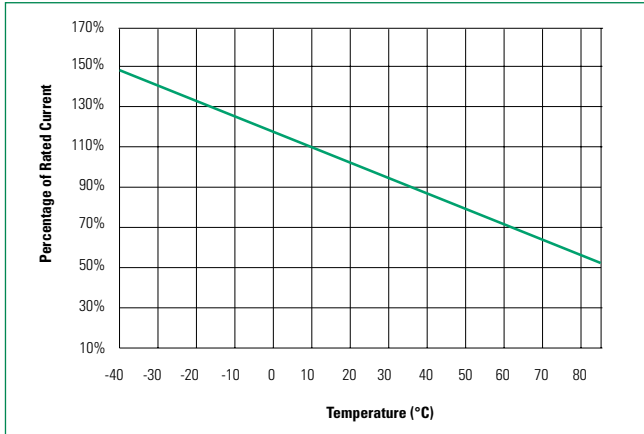


### Environmental Specifications

|  |   |
|--|---|
| <b>Operating Temperature</b>                               | -40°C to +85°C  |
| <b>Maximum Device Surface Temperature in Tripped State</b> | 125°C   |
| <b>Passive Aging</b>                                       | +85°C, 1000 hours<br>-/+10% typical resistance change                             |
| <b>Humidity Aging</b>                                      | +85°C, 85% R.H., 100 hours<br>-/+15% typical resistance change                    |
| <b>Thermal Shock</b>                                       | MIL-STD-202, Method 107<br>+85°C/-40°C 20 times<br>-30% typical resistance change |
| <b>Solvent Resistance</b>                                  | MIL-STD-202, Method 215<br>No change  |
| <b>Vibration</b>   | MIL-STD-883, Method 2007, Condition A<br>No change                                |
| <b>Moisture Sensitivity Level</b>                          | Level 1, J-STD-020  |

Note: MSL level 2a for 2920 size product

### Soldering Parameters

|   |  |                  |
|---|--|------------------|
| <b>Profile Feature</b>  | Pb-Free Assembly                                 |                  |
| <b>Average Ramp-Up Rate (<math>T_{S(max)}</math> to <math>T_p</math>)</b> | 3°C/second max                                   |                  |
| <b>Pre Heat:</b>  | <b>Temperature Min (<math>T_{S(min)}</math>)</b> | 150°C            |
|   | <b>Temperature Max (<math>T_{S(max)}</math>)</b> | 200°C            |
|   | <b>Time (Min to Max) (<math>t_s</math>)</b>      | 60 – 180 secs    |
| <b>Time Maintained Above:</b>   | <b>Temperature (<math>T_L</math>)</b>            | 217°C            |
|   | <b>Temperature (<math>t_L</math>)</b>            | 60 – 150 seconds |
| <b>Peak / Classification Temperature (<math>T_P</math>)</b>               | 260 <sup>+0/-5</sup> °C                          |                  |
| <b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>      | 20 – 40 seconds                                  |                  |
| <b>Ramp-down Rate</b>   | 6°C/second max                                   |                  |
| <b>Time 25°C to peak Temperature (<math>T_P</math>)</b>                   | 8 minutes Max.                                   |                  |

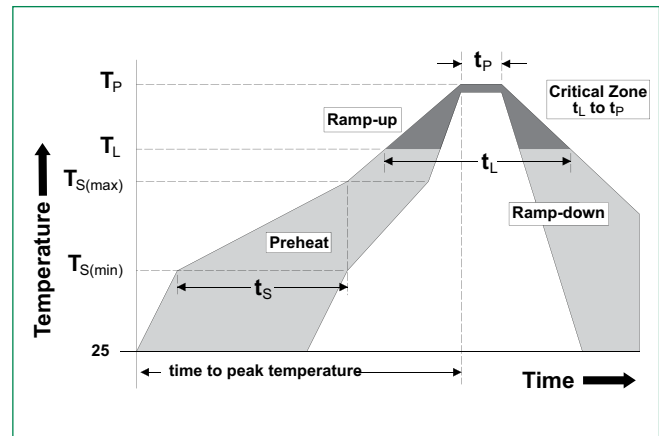


- All temperature refer to topside of the package, measured on the package body surface
- If reflow temperature exceeds the recommended profile, devices may not meet the performance requirements
- Recommended reflow methods: IR, vapor phase oven, hot air oven, N2 environment for lead

- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Devices can be cleaned using standard industry methods and solvents
- Devices can be reworked using the standard industry practices


### Physical Specifications

|                           |  |
|---------------------------|--|
| <b>Terminal Material</b>  | Solder-Plated Copper<br>(Solder Material: Matte Tin (Sn))        |
| <b>Lead Solderability</b> | Meets EIA Specification RS186-9E,<br>ANSI/J-STD-002, Category 3. |


### Dimensions

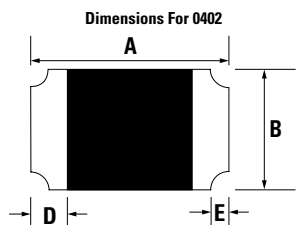

Device Top and Bottom Marking and Dimensions are Similar

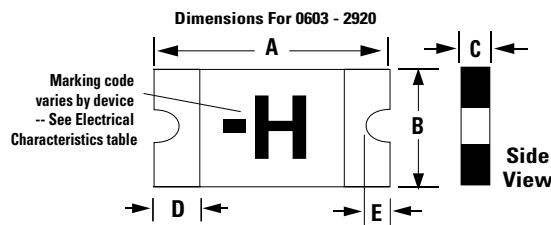

Device Top and Bottom Marking and Dimensions are Similar

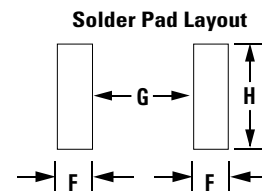



# Low Rho Series

## PolySwitch Resettable PPTC

### Packaging

| Part Number   | Ordering Number | I <sub>hold</sub> (A) | I <sub>hold</sub> Code | Packaging Option | Quantity | Quantity & Packaging Codes |
|---------------|-----------------|-----------------------|------------------------|------------------|----------|----------------------------|
| 0402L010SL    | 0402L010SLKR    | 0.10                  | 010                    |                  | 10,000   | KR                         |
| 0402L020SL    | 0402L020SLKR    | 0.20                  | 020                    |                  | 10,000   | KR                         |
| 0402L035SL    | 0402L035SLKR    | 0.35                  | 035                    |                  | 10,000   | KR                         |
| 0402L050SL    | 0402L050SLKR    | 0.50                  | 050                    |                  | 10,000   | KR                         |
| 0402L075SL    | 0402L075SLKR    | 0.75                  | 075                    |                  | 10,000   | KR                         |
| 0402L100SL    | 0402L100SLKR    | 1.00                  | 100                    |                  | 10,000   | KR                         |
| 0603L050SL    | 0603L050SLYR    | 0.50                  | 050                    |                  | 4,000    | YR                         |
| 0603L075SL    | 0603L075SLYR    | 0.75                  | 075                    |                  | 4,000    | YR                         |
| 0603L100SL    | 0603L100SLYR    | 1.00                  | 100                    |                  | 4,000    | YR                         |
| 0603L150SL    | 0603L150SLYR    | 1.50                  | 150                    |                  | 4,000    | YR                         |
| 0603L175SL    | 0603L175SLYR    | 1.75                  | 175                    |                  | 4,000    | YR                         |
| 0603L200SLV   | 0603L200SL-VYR  | 2.00                  | 200                    |                  | 4,000    | YR                         |
| 0603L300SL    | 0603L300SLYR    | 3.00                  | 300                    |                  | 4,000    | YR                         |
| 0805L075SL    | 0805L075SLYR    | 0.75                  | 075                    |                  | 4,000    | YR                         |
| 0805L110SL    | 0805L110SLYR    | 1.10                  | 110                    |                  | 4,000    | YR                         |
| 0805L150SL    | 0805L150SLYR    | 1.50                  | 150                    |                  | 4,000    | YR                         |
| 0805L175SL    | 0805L175SLYR    | 1.75                  | 175                    |                  | 4,000    | YR                         |
| 0805L200SLTH  | 0805L200SLTHYR  | 2.00                  | 200                    |                  | 4,000    | YR                         |
| 0805L260SLTH  | 0805L260SLTHYR  | 2.60                  | 260                    |                  | 4,000    | YR                         |
| 0805L300SL    | 0805L300SLWR    | 3.00                  | 300                    |                  | 3,000    | WR                         |
| 0805L300SLTH  | 0805L300SLTHYR  | 3.00                  | 300                    |                  | 4,000    | YR                         |
| 0805L350SL    | 0805L350SLYR    | 3.50                  | 350                    |                  | 4,000    | YR                         |
| 0805L400SL    | 0805L400SLWR    | 4.00                  | 400                    |                  | 3000     | WR                         |
| 1206L075SL    | 1206L075SLYR    | 0.75                  | 075                    |                  | 4,000    | YR                         |
| 1206L110SL    | 1206L110SLYR    | 1.10                  | 110                    |                  | 4,000    | YR                         |
| 1206L150SL    | 1206L150SLYR    | 1.50                  | 150                    |                  | 4,000    | YR                         |
| 1206L110/12SL | 1206L110/12SLYR | 1.10                  | 110                    |                  | 4,000    | YR                         |
| 1206L150/12SL | 1206L150/12SLYR | 1.50                  | 150                    |                  | 4,000    | YR                         |
| 1206L175SL    | 1206L175SLYR    | 1.75                  | 175                    |                  | 4,000    | YR                         |
| 1206L200SL    | 1206L200SLYR    | 2.00                  | 200                    |                  | 4,000    | YR                         |
| 1206L260SLTH  | 1206L260SLTHYR  | 2.60                  | 260                    |                  | 4,000    | YR                         |
| 1206L260/12SL | 1206L260/12SLYR | 2.60                  | 260                    |                  | 4,000    | YR                         |
| 1206L300SLTH  | 1206L300SLTHYR  | 3.00                  | 300                    |                  | 4,000    | YR                         |
| 1206L300/12SL | 1206L300/12SLYR | 3.00                  | 300                    |                  | 4,000    | YR                         |
| 1206L350SLTH  | 1206L350SLTHYR  | 3.50                  | 350                    |                  | 4,000    | YR                         |
| 1206L350/12SL | 1206L350/12SLWR | 3.50                  | 350                    |                  | 3,000    | WR                         |
| 1206L380SLTH* | 1206L380SLTHYR  | 2.82*                 | 380                    |                  | 4,000    | YR                         |
| 1206L400SL    | 1206L400SLWR    | 4.00                  | 400                    |                  | 3,000    | WR                         |
| 1206L400/12SL | 1206L400/12SLWR | 4.00                  | 400                    |                  | 3,000    | WR                         |
| 1206L450SL    | 1206L450SLWR    | 4.50                  | 450                    |                  | 3,000    | WR                         |
| 1206L450/12SL | 1206L450/12SLWR | 4.50                  | 450                    |                  | 3,000    | WR                         |
| 1206L500SLV   | 1206L500SL-VWR  | 5.00                  | 500                    |                  | 3,000    | WR                         |
| 1206L500/12SL | 1206L500/12SLPR | 5.00                  | 500                    | 2,000            | PR       |                            |
| 1206L600SL    | 1206L600SLWR    | 6.00                  | 600                    | 3,000            | WR       |                            |
| 1210L175SL    | 1210L175SLYR    | 1.75                  | 175                    | 4,000            | YR       |                            |
| 1210L200SL    | 1210L200SLYR    | 2.00                  | 200                    | 4,000            | YR       |                            |
| 1210L260SL    | 1210L260SLYR    | 2.60                  | 260                    | 4,000            | YR       |                            |
| 1210L300SL    | 1210L300SLWR    | 3.00                  | 300                    | 3,000            | WR       |                            |
| 1210L350SL    | 1210L350SLWR    | 3.50                  | 350                    | 3,000            | WR       |                            |
| 1210L380SL    | 1210L380SLYR    | 3.80                  | 380                    | 4,000            | YR       |                            |
| 1210L400SL    | 1210L400SLWR    | 4.00                  | 400                    | 3,000            | WR       |                            |
| 1210L450SL    | 1210L450SLWR    | 4.50                  | 450                    | 3,000            | WR       |                            |
| 1210L450/12SL | 1210L450/12SLWR | 4.50                  | 450                    | 3,000            | WR       |                            |
| 1210L500SL    | 1210L500SLWR    | 5.00                  | 500                    | 3,000            | WR       |                            |
| 1210L500/12SL | 1210L500/12SLWR | 5.00                  | 500                    | 3,000            | WR       |                            |
| 1210L550SL    | 1210L550SLWR    | 5.50                  | 550                    | 3,000            | WR       |                            |
| 1210L600SL    | 1210L600SLWR    | 6.00                  | 600                    | 3,000            | WR       |                            |
| 1210L900SL    | 1210L900SLPR    | 9.00                  | 900                    | 2,000            | PR       |                            |
| 1812L190SL    | 1812L190SLPR    | 1.90                  | 190                    | 2,000            | PR       |                            |
| 1812L260SL    | 1812L260SLPR    | 2.60                  | 260                    | 2,000            | PR       |                            |
| 1812L270SL    | 1812L270SLPR    | 2.70                  | 270                    | 2,000            | PR       |                            |
| 1812L300SL    | 1812L300SLPR    | 3.00                  | 300                    | 2,000            | PR       |                            |
| 1812L300/24SL | 1812L300/24SLER | 3.00                  | 300                    | 2,500            | ER       |                            |
| 1812L350SL    | 1812L350SLPR    | 3.50                  | 350                    | 2,000            | PR       |                            |
| 1812L370SL    | 1812L370SLPR    | 3.70                  | 370                    | 2,000            | PR       |                            |
| 2920L500/24SL | 2920L500/24SLDR | 5.00                  | 500                    | 1,500            | DR       |                            |
| 2920L600/24SL | 2920L600/24SLER | 6.00                  | 600                    | 2,500            | ER       |                            |
| 2920L700SL    | 2920L700SLPR    | 7.00                  | 700                    | 2,000            | PR       |                            |
| 2920L700/24SL | 2920L700/24SLER | 7.00                  | 700                    | 2,500            | ER       |                            |

Notes: \*1206L380SLTH has I<sub>hold</sub> 2.82A for at least 15min @ 55°C.




# Low Rho Series

## PolySwitch Resettable PPTC

### Part Ordering Number System


1206 L 380 / 12 SL TH -V Y R

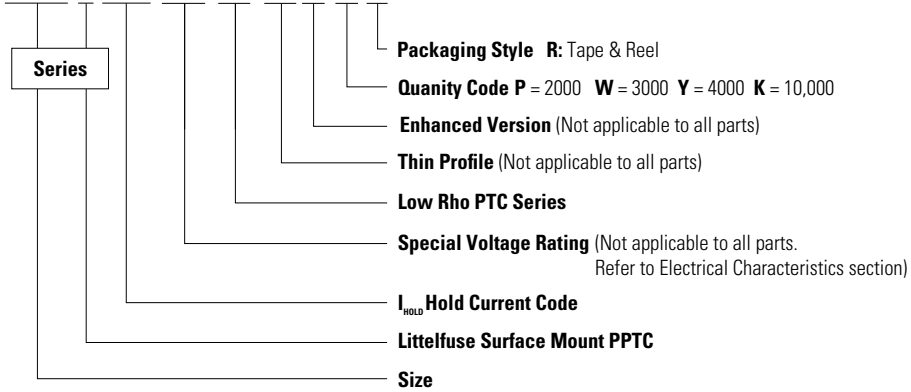


### Tape & Reel Specifications

#### Dimensions for 0402 size product (see table at left)

| Symbol                                 | 0402L010SL<br>0402L020SL<br>0402L035SL<br>0402L050SL<br>0402L075SL<br>0402L100SL |
|--|--|
| <b>Tape Dimensions: EIA-481-1 (mm)</b> |  |
| C <sub>t</sub>                         | 0.05 ± 0.01  |
| D <sub>d</sub>                         | 1.5 ± 0.1  |
| D <sub>s</sub>                         | 4.0 ± 0.1  |
| P <sub>d</sub>                         | 0.41 ± 0.1   |
| P <sub>h</sub>                         | 1.12 ± 0.1   |
| P <sub>s</sub>                         | 2.0 ± 0.1  |
| P <sub>w</sub>                         | 0.65 ± 0.03  |
| T <sub>t</sub>                         | 0.61 ± 0.1   |
| T <sub>w</sub>                         | 8.0 ± 0.1  |
| Leader min.                            | 390  |
| Trailer min.                           | 160  |
| <b>Reel Dimensions: EIA-481-1 (mm)</b> |  |
| H                                      | 12.0 ± 0.5   |
| W                                      | 9.0 ± 0.5  |
| D                                      | Ø60 ± 0.5  |
| F                                      | Ø13.0 ± 0.2  |
| C                                      | Ø178 ± 1   |
| W <sub>1</sub>                         | 2.2 ± 0.5  |
| W <sub>2</sub>                         | 3.0 ± 0.5  |
| W <sub>3</sub>                         | 4.0 ± 0.5  |
| W <sub>4</sub>                         | 5.5 ± 0.5  |

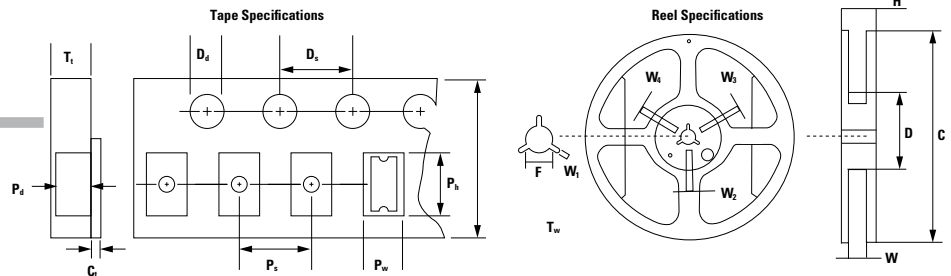

#### Dimensions for 0603, 0805, 1206, 1210, 1812 & 2920 size product (see table below)

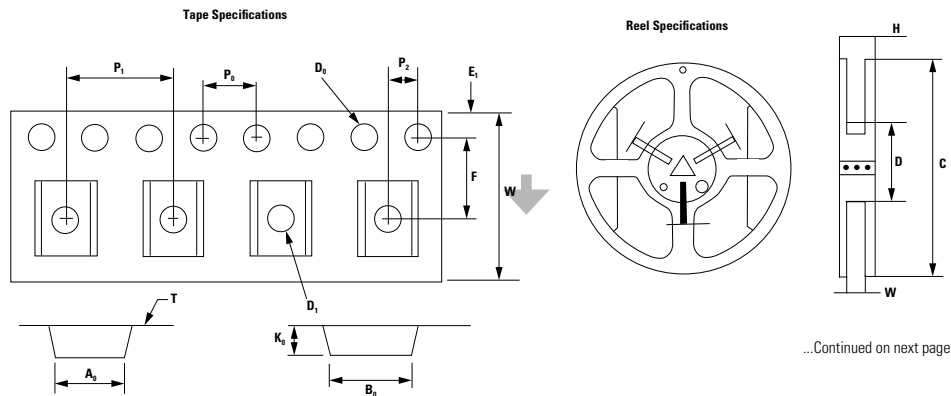

...Continued on next page.



# Low Rho Series

## PolySwitch Resettable PPTC

Dimensions for 0603, 0805, 1206, 1210, 1812 & 2920 size product  
(see tabel below)

| Symbol                                 | 0603L050SL<br>0603L075SL<br>0603L100SL | 0603L150SL<br>0603L175SL<br>0603L200SL-V<br>0603L300SL | 0805L075SL<br>0805L110SL<br>0805L150SL<br>0805L175SL<br>0805L200SLTH<br>0805L260SLTH<br>0805L300SLTH | 0805L350SL  | 0805L300SL<br>0805L400SL | 1206L075SL<br>1206L110SL<br>1206L150SL<br>1206L110/12SL<br>1206L150/12SL<br>1206L175SL<br>1206L200SL | 1206L260SLTH<br>1206L260/12SL<br>1206L300SLTH<br>1206L300/12SL<br>1206L350SLTH<br>1206L380SLTH | 1206L350/12SL<br>1206L400SL<br>1206L400/12SL<br>1206L450SL<br>1206L450/12SL<br>1206L500SL-V<br>1206L600SL | 1206L500/12SL    | 1210L175SL<br>1210L200SL<br>1210L260SL<br>1210L300SL<br>1210L380SL |
|--|--|--|--|-------------|--------------------------|--|--|---|------------------|--|
| <b>Tape Dimensions: EIA-481-1 (mm)</b> |  |  |  |             |                          |  |  |   |                  |  |
| <b>W</b>                               | 8.00 ± 0.30                            | 8.00 ± 0.30  | 8.00 ± 0.10  | 8.00 ± 0.30 | 8.00 ± 0.30              | 8.20 +0.10/-0.30   |  | 8.15 +0.15/-0.30  | 8.20 +0.10/-0.30 | 8.00 ± 0.30  |
| <b>F</b>                               | 3.50 ± 0.05                            | 3.50 ± 0.05  | 3.50 ± 0.05  | 3.50 ± 0.05 | 3.50 ± 0.05              | 3.50 ± 0.05  |  | 3.50 ± 0.05   | 3.50 ± 0.05      | 3.50 ± 0.05  |
| <b>E<sub>1</sub></b>                   | 1.75 ± 0.10                            | 1.75 ± 0.10  | 1.75 ± 0.10  | 1.75 ± 0.10 | 1.75 ± 0.10              | 1.75 ± 0.10  |  | 1.75 ± 0.10   | 1.75 ± 0.10      | 1.75 ± 0.10  |
| <b>D<sub>0</sub></b>                   | 1.55 ± 0.05                            | 1.55 ± 0.05  | 1.55 ± 0.05  | 1.55 ± 0.05 | 1.55 ± 0.05              | 1.55 ± 0.05  |  | 1.55 ± 0.05   | 1.55 ± 0.05      | 1.55 ± 0.05  |
| <b>D<sub>1</sub></b>                   | 0.50 ± 0.10                            | 0.50 ± 0.10  | 1.00 (Min.)  | 1.00 ± 0.10 | 1.00 ± 0.10              | 1.00 ± 0.10  |  | 1.00 ± 0.10   | 1.00 ± 0.10      | 1.00 (Min.)  |
| <b>P<sub>0</sub></b>                   | 4.00 ± 0.10                            | 4.00 ± 0.10  | 4.00 ± 0.08  | 4.00 ± 0.10 | 4.00 ± 0.10              | 4.00 ± 0.10  |  | 4.00 ± 0.10   | 4.00 ± 0.10      | 4.00 ± 0.10  |
| <b>P<sub>1</sub></b>                   | 4.00 ± 0.10                            | 4.00 ± 0.10  | 4.00 ± 0.10  | 4.00 ± 0.10 | 4.00 ± 0.10              | 4.00 ± 0.10  |  | 4.00 ± 0.10   | 4.00 ± 0.10      | 4.00 ± 0.10  |
| <b>P<sub>2</sub></b>                   | 2.00 ± 0.05                            | 2.00 ± 0.05  | 2.00 ± 0.05  | 2.00 ± 0.05 | 2.00 ± 0.05              | 2.00 ± 0.05  |  | 2.00 ± 0.05   | 2.00 ± 0.05      | 2.00 ± 0.05  |
| <b>A<sub>0</sub></b>                   | 1.10 ± 0.10                            | 1.10 ± 0.10  | 1.60 ± 0.10  | 1.65 ± 0.10 | 1.65 ± 0.10              | 1.95 ± 0.10  |  | 1.92 ± 0.10   | 1.95 ± 0.10      | 2.82 ± 0.10  |
| <b>B<sub>0</sub></b>                   | 1.92 ± 0.10                            | 1.92 ± 0.10  | 2.30 ± 0.10  | 2.35 ± 0.10 | 2.35 ± 0.10              | 3.65 ± 0.10  |  | 3.65 ± 0.10   | 3.65 ± 0.10      | 3.46 ± 0.10  |
| <b>T</b>                               | 0.20 ± 0.10                            | 0.20 ± 0.10  | 0.25 ± 0.10  | 0.20 ± 0.10 | 0.25 ± 0.10              | 0.20 ± 0.10  |  | 0.25 ± 0.10   | 0.25 ± 0.10      | 0.25 ± 0.10  |
| <b>K<sub>0</sub></b>                   | 0.72 ± 0.10                            | 0.96 ± 0.10  | 0.90 ± 0.10  | 1.05 ± 0.10 | 1.50 ± 0.10              | 0.87 ± 0.10  |  | 1.30 ± 0.10   | 1.70 ± 0.10      | 1.00 ± 0.10  |
| <b>Leader min.</b>                     |  |  |  |             |                          | 390  |  |   |                  |  |
| <b>Trailer min.</b>                    |  |  |  |             |                          | 160  |  |   |                  |  |
| <b>Reel Dimensions: EIA-481-1 (mm)</b> |  |  |  |             |                          |  |  |   |                  |  |
| <b>H</b>                               |  |  |  |             |                          | 11.0 ± 0.5   |  |   |                  |  |
| <b>W</b>                               |  |  |  |             |                          | 9.0 ± 1.5  |  |   |                  |  |
| <b>C</b>                               |  |  |  |             |                          | Ø178 ± 1.0   |  |   |                  |  |
| <b>D</b>                               |  |  |  |             |                          | Ø60.2 ± 0.5  |  |   |                  |  |

| Symbol                                 | 1210L350SL<br>1210L400SL<br>1210L450SL<br>1210L450/12SL<br>1210L500SL<br>1210L500/12SL<br>1210L550SL<br>1210L600SL | 1210L900SL  | 1812L190SL<br>1812L260SL<br>1812L270SL<br>1812L300SL<br>1812L350SL<br>1812L370SL | 1812L300/24SL | 2920L500/24SL | 2920L700SL   | 2920L600/24SL<br>2920L700/24SL |     |
|--|--|-------------|--|---------------|---------------|--------------|--------------------------------|-----|
| <b>Tape Dimensions: EIA-481-1 (mm)</b> |  |             |  |               |               |              |                                |     |
| <b>W</b>                               | 8.00 ± 0.30  | 8.00 ± 0.30 | 12.00 ± 0.30   | 12.00 ± 0.30  | 16.00 ± 0.30  | 16.00 ± 0.30 | 16.00 ± 0.30                   |     |
| <b>F</b>                               | 3.50 ± 0.05  | 3.50 ± 0.05 | 5.50 ± 0.05  | 5.50 ± 0.05   | 7.50 ± 0.10   | 7.50 ± 0.10  | 7.50 ± 0.10                    |     |
| <b>E<sub>1</sub></b>                   | 1.75 ± 0.10  | 1.75 ± 0.10 | 1.75 ± 0.10  | 1.75 ± 0.10   | 1.75 ± 0.10   | 1.75 ± 0.10  | 1.75 ± 0.10                    |     |
| <b>D<sub>0</sub></b>                   | 1.55 ± 0.05  | 1.55 ± 0.05 | 1.55 ± 0.05  | 1.50 +0.10/-0 | 1.55 ± 0.05   | 1.55 ± 0.05  | 1.50 +0.10/-0                  |     |
| <b>D<sub>1</sub></b>                   | 1.00 (Min.)  | 1.00 (Min.) | 1.55 (Min.)  | 1.50 +0.10/-0 | 1.50 ± 0.10   | 1.50 ± 0.10  | 1.50 (Min.)                    |     |
| <b>P<sub>0</sub></b>                   | 4.00 ± 0.10  | 4.00 ± 0.10 | 4.00 ± 0.10  | 4.00 ± 0.10   | 4.00 ± 0.10   | 4.00 ± 0.10  | 4.00 ± 0.10                    |     |
| <b>P<sub>1</sub></b>                   | 4.00 ± 0.10  | 4.00 ± 0.10 | 8.00 ± 0.10  | 8.00 ± 0.10   | 8.00 ± 0.10   | 8.00 ± 0.10  | 8.00 ± 0.10                    |     |
| <b>P<sub>2</sub></b>                   | 2.00 ± 0.05  | 2.00 ± 0.05 | 2.00 ± 0.05  | 2.00 ± 0.05   | 2.00 ± 0.10   | 2.00 ± 0.10  | 2.00 ± 0.10                    |     |
| <b>A<sub>0</sub></b>                   | 2.82 ± 0.10  | 2.80 ± 0.10 | 3.58 ± 0.10  | 3.55 ± 0.10   | 5.74 ± 0.10   | 5.74 ± 0.10  | 5.60 ± 0.10                    |     |
| <b>B<sub>0</sub></b>                   | 3.50 ± 0.10  | 3.50 ± 0.10 | 4.93 ± 0.10  | 4.88 ± 0.10   | 8.02 ± 0.10   | 8.02 ± 0.10  | 7.95 ± 0.10                    |     |
| <b>T</b>                               | 0.20 ± 0.10  | 0.25 ± 0.10 | 0.25 ± 0.05  | 0.30 ± 0.05   | 0.30 ± 0.10   | 0.30 ± 0.10  | 0.30 ± 0.05                    |     |
| <b>K<sub>0</sub></b>                   | 1.30 ± 0.10  | 1.60 ± 0.10 | 0.87 ± 0.06  | 2.45 ± 0.10   | 1.30 ± 0.10   | 0.91 ± 0.10  | 2.55 ± 0.10                    |     |
| <b>Leader min.</b>                     |  |             |  |               |               |              |                                | 390 |
| <b>Trailer min.</b>                    |  |             |  |               |               |              |                                | 160 |
| <b>Reel Dimensions: EIA-481-1 (mm)</b> |  |             |  |               |               |              |                                |     |
| <b>H</b>                               | 11.0 ± 0.5   |             | 16.0 ± 0.5   | 17.4 ± 1.0    | 19.5 ± 1.0    |              | 21.4 ± 1.0                     |     |
| <b>W</b>                               | 9.0 ± 1.5  |             | 13.2 ± 1.5   | 13.4 ± 1.0    | 17 ± 0.2      |              | 17.4 ± 1.0                     |     |
| <b>C</b>                               | Ø178 ± 1.0   |             | Ø178 ± 1.0   | Ø330 ± 1.0    | Ø180 ± 3.0    |              | Ø330 ± 1.0                     |     |
| <b>D</b>                               | Ø60.2 ± 0.5  |             | Ø60.2 ± 0.5  | Ø99 ± 0.5     | Ø60 ± 0.5     |              | Ø99 ± 0.5                      |     |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).