

Search


Home > Products > Fuses > Axial Radial Thru Hole Fuses > TR5 Fuses > 382 > 38211600410

Print

38211600410 - 382 Series

Series: 382

Questions? Contact Littelfuse Support

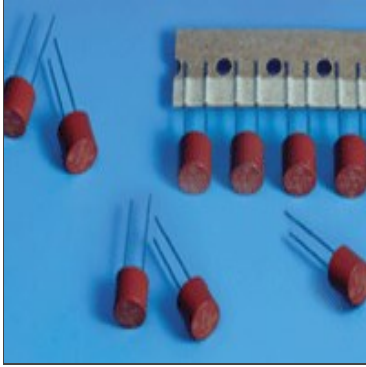

[Fuse 382 Datasheet](#)

The 382 Series are TR5®, time- Lag type, 250V rated fuses, with enhanced breaking capacity designed in accordance to IEC 60127 - 3.

Features:

- Lead Free
- 100A breaking capacity
- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance
- Shocksafe casing
- Vibration resistant
- Halogen free

Check Stock

Order Samples

Feedback

Electrical Characteristics	Technical Resources	Environmental Info
Property (Mouseover for details)	Value	
Ampere Rating (A)	1.6	
Nominal Melting I ² T (A ² sec)	13	
Interrupting Rating	100A@250VAC	
Min Operating Temp °C	-40	
Max Operating Temp (°C)	85	
Moisture Sensitivity Level	MIL-STD-202 Method 106	
Nominal Power Dissipation (W)	490	
Nominal Voltage Drop (mV)	90	
Nominal Cold Resistance (Ohms)	0.0377	
Opening	Slo-Blo/Time Lag (T)/Time Delay	
Package Size	TR5 (8.5x8mm)	
VAC (V)	250	

Connect with Littelfuse

Sign up to receive special offers and news

For more details about how we use your information, check our [Privacy Statement](#).



Mobile Site

About Littelfuse

- About Littelfuse
- Conflict Free Statement
- History
- Investor Relations
- Legal
- Press Room
- Privacy Statement
- Supply Chain Transparency
- Website Feedback

Explore Littelfuse

- Capabilities Brochures
- Careers
- Check Distributor Stock
- Competitor Cross Reference
- Industries
- Order Samples
- Products
- Services

Technical Resources

- Application Designs
- Education
- FAQs
- iDesign™
- Littelfuse University
- Product Catalogs
- Quality Documents
- Technical Documents